X/Open CAE Specification

Window Management (X11R5): X Window System Protocol

X/Open Company Ltd.

© May 1995, X/Open Company Limited

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior permission of the copyright owners.

This specification is derived from documents which are Copyright © 1985, 1986, 1987, 1988, 1989, 1990, 1991 by Massachusetts Institute of Technology, Cambridge, Massachusetts, and Digital Equipment Corporation, Maynard, Massachusetts, and Copyright © 1990, 1991 by Tektronix, Inc. Permission for X/Open to use, copy, modify and distribute this documentation for any purpose and without fee has been granted by these copyright owners.

X/Open CAE Specification

Window Management (X11R5): X Window System Protocol

ISBN: ISBN 1-85912-087-3

X/Open Document Number: C507

Published by X/Open Company Ltd., U.K.

Any comments relating to the material contained in this document may be submitted to X/Open at:

X/Open Company Limited Apex Plaza Forbury Road Reading Berkshire, RG1 1AX United Kingdom

or by Electronic Mail to:

XoSpecs@xopen.org

Contents

Chapter	1	Overview of the X Window System
-	1.1	Introduction
	1.2	X Window System Overview
	1.2.1	X Platform Abstraction Layers
	1.2.2	User Interface Platform
	1.2.3	A Single X Application
	1.2.4	X Application Relationships
Chapter	2	Introduction
-	2.1	Status
	2.2	Syntactic Conventions
	2.3	Common Types
	2.4	Predefined Atoms 1
	2.4.1	Private Atoms 1
Chapter	3	Protocol Overview1
-	3.1	Data Formats1
	3.1.1	Request Format 1
	3.1.2	Reply Format 1
	3.1.3	Error Format1
	3.1.4	Event Format1
	3.2	Input Devices1
	3.2.1	Keyboards1
	3.2.2	Pointers 1
	3.3	Connection Setup1
	3.3.1	Connection Initiation 1
	3.3.2	Server Response 1
	3.3.3	Server Information1
	3.3.4	Screen Information
	3.3.5	Visual Information
	3.4	Connection Close
	3.5	Errors
	3.6	Flow Control and Concurrency
Chapter	4	Requests 2
Chapter	5	Events
•	5.1	General Notes
	5.2	Enter/Leave Events9
	5.3	Focus Events9
	5.4	Other Events 0

Appendix B Protocol Encoding 125 B.1 Syntactic Conventions 125 B.2 Common Types 128 B.3 Keyboards 132 B.4 Pointers 132 B.5 Predefined Atoms 133 B.6 Connection Setup 134 B.7 Requests 137 B.8 Events 177 B.9 Errors 188 Glossary 193 Index 203 List of Figures 2 1-1 X Window System Overview 2 1-2 X Platform Abstraction Layers 3 1-3 User Interface Platform 4 1-4 A Single X Application 5 1-5 X Application Relationships 6	Appendix	A	KEYSYM Encoding	103
B.1 Syntactic Conventions 125 B.2 Common Types 128 B.3 Keyboards 132 B.4 Pointers 132 B.5 Predefined Atoms 133 B.6 Connection Setup 134 B.7 Requests 137 B.8 Events 177 B.9 Errors 188 Glossary 193 Index 203 List of Figures 2 1-1 X Window System Overview 2 1-2 X Platform Abstraction Layers 3 1-3 User Interface Platform 4 1-4 A Single X Application 5	Appendix	В	Protocol Encoding	125
B.2 Common Types 128 B.3 Keyboards 132 B.4 Pointers 132 B.5 Predefined Atoms 133 B.6 Connection Setup 134 B.7 Requests 137 B.8 Events 177 B.9 Errors 188 Glossary 193 Index 203 List of Figures 1-1 X Window System Overview 2 1-2 X Platform Abstraction Layers 3 1-3 User Interface Platform 4 1-4 A Single X Application 5	• •			
B.3 Keyboards 132 B.4 Pointers 132 B.5 Predefined Atoms 133 B.6 Connection Setup 134 B.7 Requests 137 B.8 Events 177 B.9 Errors 188 Glossary 193 Index 203 List of Figures 2 1-1 X Window System Overview 2 1-2 X Platform Abstraction Layers 3 1-3 User Interface Platform 4 1-4 A Single X Application 5		B.2		
B.5 Predefined Atoms 133 B.6 Connection Setup 134 B.7 Requests 137 B.8 Events 177 B.9 Errors 188 Glossary 193 Index 203 List of Figures 1-1 X Window System Overview 2 1-2 X Platform Abstraction Layers 3 1-3 User Interface Platform 4 1-4 A Single X Application 5		B.3		
B.6 Connection Setup. 134 B.7 Requests. 137 B.8 Events. 177 B.9 Errors. 188 Glossary 193 Index. 203 List of Figures 1-1 X Window System Overview. 2 1-2 X Platform Abstraction Layers. 3 1-3 User Interface Platform. 4 1-4 A Single X Application 5		B.4	Pointers	132
B.7 Requests 137 B.8 Events 177 B.9 Errors 188 Glossary 193 Index 203 List of Figures 1-1 X Window System Overview 2 1-2 X Platform Abstraction Layers 3 1-3 User Interface Platform 4 1-4 A Single X Application 5		B.5	Predefined Atoms	133
B.8 Events 177 B.9 Errors 188 Glossary 193 Index 203 List of Figures 1-1 X Window System Overview 2 1-2 X Platform Abstraction Layers 3 1-3 User Interface Platform 4 1-4 A Single X Application 5		B.6	Connection Setup	134
B.8 Events 177 B.9 Errors 188 Glossary 193 Index 203 List of Figures 1-1 X Window System Overview 2 1-2 X Platform Abstraction Layers 3 1-3 User Interface Platform 4 1-4 A Single X Application 5		B.7	Requests	137
B.9 Errors 188		B.8		
Index		B.9		
List of Figures 1-1 X Window System Overview			Glossary	193
1-1 X Window System Overview			Index	203
1-2X Platform Abstraction Layers	List of Fig	ures		
1-2X Platform Abstraction Layers		1-1	X Window System Overview	2
1-3 User Interface Platform		1-2		3
		1-3		4
		1-4		5
		1-5	X Application Relationships	



X/Open

X/Open is an independent, worldwide, open systems organisation supported by most of the world's largest information systems suppliers, user organisations and software companies. Its mission is to bring to users greater value from computing, through the practical implementation of open systems.

X/Open's strategy for achieving this goal is to combine existing and emerging standards into a comprehensive, integrated, high-value and usable open system environment, called the Common Applications Environment (CAE). This environment covers the standards, above the hardware level, that are needed to support open systems. It provides for portability and interoperability of applications, and so protects investment in existing software while enabling additions and enhancements. It also allows users to move between systems with a minimum of retraining.

X/Open defines this CAE in a set of specifications which include an evolving portfolio of application programming interfaces (APIs) which significantly enhance portability of application programs at the source code level, along with definitions of and references to protocols and protocol profiles which significantly enhance the interoperability of applications and systems.

The X/Open CAE is implemented in real products and recognised by a distinctive trade mark — the X/Open brand — that is licensed by X/Open and may be used on products which have demonstrated their conformance.

X/Open Technical Publications

X/Open publishes a wide range of technical literature, the main part of which is focussed on specification development, but which also includes Guides, Snapshots, Technical Studies, Branding/Testing documents, industry surveys, and business titles.

There are two types of X/Open specification:

• CAE Specifications

CAE (Common Applications Environment) specifications are the stable specifications that form the basis for X/Open-branded products. These specifications are intended to be used widely within the industry for product development and procurement purposes.

Anyone developing products that implement an X/Open CAE specification can enjoy the benefits of a single, widely supported standard. In addition, they can demonstrate compliance with the majority of X/Open CAE specifications once these specifications are referenced in an X/Open component or profile definition and included in the X/Open branding programme.

CAE specifications are published as soon as they are developed, not published to coincide with the launch of a particular X/Open brand. By making its specifications available in this way, X/Open makes it possible for conformant products to be developed as soon as is practicable, so enhancing the value of the X/Open brand as a procurement aid to users.

• Preliminary Specifications

These specifications, which often address an emerging area of technology and consequently are not yet supported by multiple sources of stable conformant implementations, are released in a controlled manner for the purpose of validation through implementation of products. A Preliminary specification is not a draft specification. In fact, it is as stable as X/Open can make it, and on publication has gone through the same rigorous X/Open development and review procedures as a CAE specification.

Preliminary specifications are analogous to the *trial-use* standards issued by formal standards organisations, and product development teams are encouraged to develop products on the basis of them. However, because of the nature of the technology that a Preliminary specification is addressing, it may be untried in multiple independent implementations, and may therefore change before being published as a CAE specification. There is always the intent to progress to a corresponding CAE specification, but the ability to do so depends on consensus among X/Open members. In all cases, any resulting CAE specification is made as upwards-compatible as possible. However, complete upwards-compatibility from the Preliminary to the CAE specification cannot be guaranteed.

In addition, X/Open publishes:

• Guides

These provide information that X/Open believes is useful in the evaluation, procurement, development or management of open systems, particularly those that are X/Open-compliant. X/Open Guides are advisory, not normative, and should not be referenced for purposes of specifying or claiming X/Open conformance.

• Technical Studies

X/Open Technical Studies present results of analyses performed by X/Open on subjects of interest in areas relevant to X/Open's Technical Programme. They are intended to communicate the findings to the outside world and, where appropriate, stimulate discussion and actions by other bodies and the industry in general.

Snapshots

These provide a mechanism for X/Open to disseminate information on its current direction and thinking, in advance of possible development of a Specification, Guide or Technical Study. The intention is to stimulate industry debate and prototyping, and solicit feedback. A Snapshot represents the interim results of an X/Open technical activity. Although at the time of its publication, there may be an intention to progress the activity towards publication of a Specification, Guide or Technical Study, X/Open is a consensus organisation, and makes no commitment regarding future development and further publication. Similarly, a Snapshot does not represent any commitment by X/Open members to develop any specific products.

Versions and Issues of Specifications

As with all *live* documents, CAE Specifications require revision, in this case as the subject technology develops and to align with emerging associated international standards. X/Open makes a distinction between revised specifications which are fully backward compatible and those which are not:

• a new *Version* indicates that this publication includes all the same (unchanged) definitive information from the previous publication of that title, but also includes extensions or additional information. As such, it *replaces* the previous publication.

• a new *Issue* does include changes to the definitive information contained in the previous publication of that title (and may also include extensions or additional information). As such, X/Open maintains *both* the previous and new issue as current publications.

Corrigenda

Most X/Open publications deal with technology at the leading edge of open systems development. Feedback from implementation experience gained from using these publications occasionally uncovers errors or inconsistencies. Significant errors or recommended solutions to reported problems are communicated by means of Corrigenda.

The reader of this document is advised to check periodically if any Corrigenda apply to this publication. This may be done either by email to the X/Open info-server or by checking the Corrigenda list in the latest X/Open Publications Price List.

To request Corrigenda information by email, send a message to info-server@xopen.co.uk with the following in the Subject line:

```
request corrigenda; topic index
```

This will return the index of publications for which Corrigenda exist.

This Document

This document is a CAE Specification (see above).

This X/Open interface definition is based on the following document:

X Window System Protocol MIT X Consortium, X Version 11, Release 5 by Robert W.Scheifler, Laboratory for Computer Science, Massachusetts Institute for Technology

Structure

The source document for this publication, the **Xlib** - **X Window System Protocol** specification from MIT, has undergone revision since X11R4, and this is reflected in the new or rearranged chapters of this publication.

- **Chapter 1** gives an overview of the X Window System, and is common to all 4 of the X/Open Window Management specifications.
- Chapters 2 to 5 are the MIT X Window System Protocol standard.
- **Appendices A and B** are the same as these appendices in the MIT X Window System Protocol standard.

X/Open Window Management Document Set

This specification is one of four specifications in the X/Open Window Management (X11R5) document set. The full set comprises:

- X Window System Protocol
- Xlib C Language Binding
- X Toolkit Intrinsics
- File Formats and Application Conventions.

These X11R5 specifications are available as a 4-volume set (Document Number T410).

The following table shows the structure and organisation of material in this document set in terms of the MIT documentation of the X Window System, on which the X/Open document set is based.

In each document, Chapter 1 is an X/Open overview of the X Window System, which is not in the MIT documentation.

X/Open Document	Subject	MIT Document
X Window System Protocol	Description and definition of the X Protocol	X Window System Protocol
Xlib - C Language Binding Chapters 2-17 and Appendices A-D	Description of Xlib functions and their use	Xlib - C Language X Interface
Chapter 18	X/Open additional requirements	None
X Toolkit Intrinsics	Description of X Toolkit functions and their use	X Toolkit Intrinsics
File Formats and Application Conventions	Various formats and conventions for application cooperation and communication	Inter-Client Communication Conventions Manual (ICCCM), Version 1.1 X Logical Font Description (XLFD), Version 1.4 Compound Text, Version 1.1 Bitmap Distribution Format (BDF) 2.1

The X Window Management (X11 Release 5) System is required by the X/Open Common Desktop Environment (XCDE), which defines a common graphical user interface environment. The other specifications in the XCDE family are:

- X/Open Common Desktop Environment (XCDE) 2-volume set comprising:
 - Definitions and Infrastructure
 - Services and Applications
- Motif Toolkit API (electronic publication)
- Calendaring and Scheduling API (XCS).

Trade Marks

 $\mathsf{UNIX}^{(\!R\!)}$ is a registered trade mark in the United States and other countries, licensed exclusively through X/Open Company Limited.

 $X/Open^{\textcircled{R}}$ is a registered trade mark, and the "X" device is a trade mark, of X/Open Company Limited.

X Window System TM is a trade mark of the Massachusetts Institute of Technology.

Acknowledgements

X/Open would like to acknowledge the use of parts of the document X Window System Protocol, MIT X Consortium, X Version 11, Release 5.

Referenced Documents

The following documents are referenced in this specification:

X11R5 Xlib

X/Open CAE Specification, May 1995, Window Management (X11R5): X Lib - C Language Binding (ISBN: 1-85912-088-1, C508).

X11R5 X Toolkit

X/Open CAE Specification, May 1995, Window Management (X11R5): X Toolkit Intrinsics (ISBN: 1-85912-089-X, C509).

X11R5 File Formats

X/Open CAE Specification, May 1995, Window Management (X11R5): File Formats and Applications Conventions (ISBN: 1-85912-090-3, C510).

This comprises:

- Inter-Client Communications Conventions Manual (ICCCM)
- X Logical Font Description (XLFD)
- Compound Text
- Bitmap Distribution Format (BDF).

ISO 8859-1

ISO 8859-1: 1987, Information Processing — 8-bit Single-byte Coded Graphic Character Sets — Part 1: Latin Alphabet No. 1.

Referenced Documents

Chapter 1 Overview of the X Window System

1.1 Introduction

The X Window System is a network-transparent windowing system developed under the auspices of Project Athena at the Massachusetts Institute of Technology. The X Window System is implemented as a client-server model. The window system functionality is provided by a display server, which is resident on a machine which has one or more monochrome or color raster displays attached. Client applications which require window system services attach to a server, and subsequently communicate with it, via an Inter-Process Communications connection. This uses a standard and extensible asynchronous protocol to communicate window system protocol requests to the server.

A client may, but not necessarily, run on the same machine as the X Server it is connected to. Applications may reside on hosts remotely connected to the system which hosts the display server by some kind of local or wide-area networking technology. This is dependent upon the level of functionality provided by the particular networking environment in which particular server and client implementations operate.

An X Window System server supports one or more physical, monochrome or color, raster streens, which display a logical hierarchy of (possibly) overlapping rectangular areas known as "windows". Also associated with the server is a number of input devices. Normally these include a keyboard and some form of pointing device, such as a mouse or digitising tablet.

At the top, or root, of the logical window hierarchy, is the "root window" which completely covers the physical screen with which the hierarchy is associated. In the normal course of operation, each "root window" will be partially, or completely, covered by "child windows" created by clients. Due to the organisation of the window hierarchy, an application program may create a tree of arbitrary depth on each screen. The X Window System Protocol provides applications with the functionality to create and manipulate windows and their associated attributes. The X Window System also provides the ability to associate arbitrary data with a window, access fonts and colors, perform general graphical output, and obtain input from the available devices, using a canonical, programmatic interface, which embodies a high degree of device independence.

A client that converses with the server using the X Window System protocol may operate "correctly" in isolation, but might not coexist properly with other clients sharing the same server. The **ICCCM** specification is a set of conventions to allow clients to cooperate in the areas of selections, cut buffers, window management, session management and resources.

1.2 X Window System Overview

The X Window System architecture is divided into two distinct parts (Figure 1-1):

display servers Provide display capabilities and keep track of user input.

clients Application programs that perform specific tasks.

This separation allows the clients and servers either to work together on the same system, or across a network. Regardless of where the clients are running, all user input and displayed output will occur on the workstation server. Communication is accomplished (in a network transparent fashion) using the X Protocol.

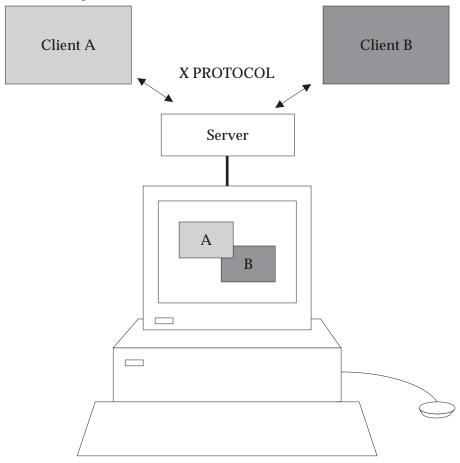


Figure 1-1 X Window System Overview

1.2.1 X Platform Abstraction Layers

The X Window System consists of several distinct parts. Figure 1-2 shows them as layers.

- The *X Protocol* defines the format and sequencing of byte streams and semantics (messages) passed between X Clients and the X Server.
- Xlib specifies the function call interface to build the messages defined by the X Protocol.
- The *Xt Intrinsics* provide the basic constructs to support the creation and use of user interface objects (widgets).

• The *Widgets* provide a set of user interface features (such as menus and pushbuttons) and allow applications to manipulate these features using object-oriented programming techniques.




Figure 1-2 X Platform Abstraction Layers

1.2.2 User Interface Platform

From the programmer's perspective, the X Window System provides a *User Interface Platform* with multiple interfaces (Figure 1-3). Applications can be developed using any or all of these interfaces, depending on the requirements of the developer. It is important to note here that the lowest-level interface is Xlib – the X Protocol does not provide a practical programming interface. Therefore, all interaction with the X Protocol is handled by Xlib calls. It is not necessary to program directly using Xlib to create an X Window System application. Therefore, the interface boundaries should be viewed as transparent from a programmer's perspective (the programmer may use any or all of them to achieve the desired results in the program).




Figure 1-3 User Interface Platform

1.2.3 A Single X Application

The User Interface platform provides all the services necessary to manage the user interface aspects of the application. *Application functionality* is that part of the application which is independent of any user interface function, but it is the application that knows what it wants to accomplish through the user interface. The translation of the application's user interface needs into user interface actions or displays is achieved through a form of binding.

This binding can be an integral part of the application, indistinguishable from the application functionality, or it can be a separate module created by a development tool or language and stored in a separate library or binary module. The separation of *application functionality* from *user interface functionality* (in so far as it is possible) helps to provide application portability and ease of maintenance.

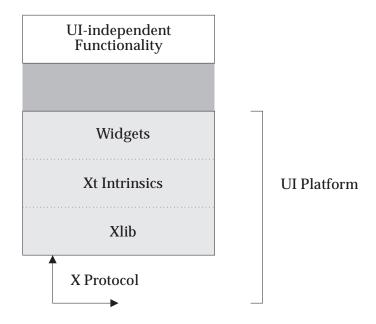


Figure 1-4 A Single X Application

1.2.4 X Application Relationships

The X Window System environment usually consists of several *client applications*, all communicating with an *X Server* at the same time using the *X Protocol* (Figure 1-5). Some of these clients have special roles within the environment, such as window and session managers. In order for all of these applications to work together *cooperatively*, *Inter-Client Communications Conventions* have been established. These ensure that client applications will cooperate in their use of the server and can also interact directly with each other.

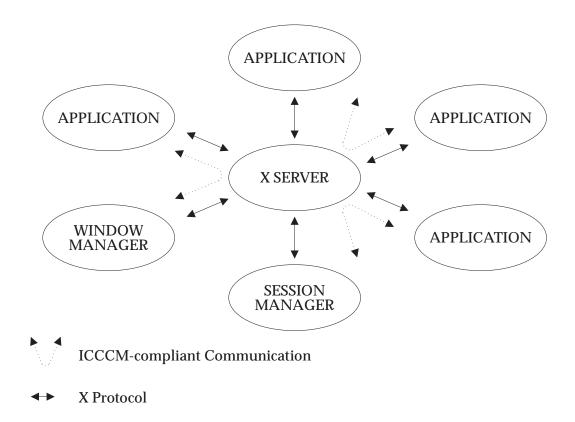


Figure 1-5 X Application Relationships

Chapter 2 Introduction

2.1 Status

This document is syntactically and semantically complete.

All the facilities specified in this document are mandatory.

Although the X Window System also provides a protocol extension mechanism to allow for additional features, these features are not standardized and will often be vendor-specific. Their use, although useful and necessary in some applications, cannot be guaranteed to be present in all computers that implement the X Window System.

Internationalization

The X Window System is 8-bit transparent. Any 8-bit or 16-bit codeset may be used in the font and text calls. In addition, 8-bit codesets may be used in all strings including filenames, atom names and color names.

2.2 **Syntactic Conventions**

The rest of this document uses the following syntactic conventions.

- The syntax {...} encloses a set of alternatives.
- The syntax [...] encloses a set of structure components.
- In general, TYPEs are in upper case and Alternative Values are capitalized.
- Requests in Chapter 4 are described in the following format:

RequestName

```
arg1: type1
argN: typeN
=>
result1: type1
resultM: typeM
Errors: kind1, ..., kindK
```

Description.

If no => is present in the description, then the request has no reply (it is asynchronous), although errors may still be reported. If =>+ is used, then one or more replies can be generated for a single request.

 $\bullet\,$ Events in Chapter 5 are described in the following format:

EventName

value1: type1
valueN: typeN

Description.

Introduction Common Types

2.3 Common Types

Name	Value
LISTofFOO	A type name of the form LISTofFOO means a counted list of elements of type FOO. The size of the length field may vary (it is not necessarily the same size as a FOO), and in some cases, it may be implicit. It is fully specified in Appendix B. Except where explicitly noted, zero-length lists are legal.
BITMASK LISTofVALUE	The types BITMASK and LISTofVALUE are somewhat special. Various requests contain arguments of the form: value-mask: BITMASK value-list: LISTofVALUE These are used to allow the client to specify a subset of a heterogeneous collection of optional arguments. The value-mask specifies which arguments are to be provided; each such argument is assigned a unique bit position. The representation of the BITMASK will typically contain more bits than there are defined arguments. The unused bits in the value-mask must be zero (or the server generates a Value error). The value-list contains one value for each bit set to 1 in the mask, from least-significant to most-significant bit in the mask. Each value is represented with four bytes, but the actual value occupies only the least-significant bytes as required. The values of the unused bytes do not matter.
OR	A type of the form "T1 or or Tn" means the union of the indicated types. A single-element type is given as the element without enclosing braces.
WINDOW PIXMAP CURSOR FONT GCONTEXT COLORMAP DRAWABLE FONTABLE ATOM VISUALID VALUE BYTE INT8 INT16 INT32 CARD8 CARD16 CARD32 TIMESTAMP	32-bit value (top three bits guaranteed to be zero) 32-bit value (top three bits guaranteed to be zero) 32-bit value (top three bits guaranteed to be zero) 32-bit value (top three bits guaranteed to be zero) 32-bit value (top three bits guaranteed to be zero) 32-bit value (top three bits guaranteed to be zero) WINDOW or PIXMAP FONT or GCONTEXT 32-bit value (top three bits guaranteed to be zero) 32-bit value (top three bits guaranteed to be zero) 32-bit value (top three bits guaranteed to be zero) 32-bit value (top three bits guaranteed to be zero) 32-bit signed integer 16-bit signed integer 32-bit unsigned integer 16-bit unsigned integer 32-bit unsigned integer 32-bit unsigned integer
BITGRAVITY	(Forget, Static, NorthWest, North, NorthEast, West, Center, East, SouthWest, South, SouthEast)

Common Types Introduction

Name	Value
WINGRAVITY	{Unmap, Static, NorthWest, North, NorthEast, West, Center, East, SouthWest, South, SouthEast}
BOOL	{True, False}
EVENT	{KeyPress, KeyRelease, OwnerGrabButton, ButtonPress, ButtonRelease, EnterWindow, LeaveWindow, PointerMotion, PointerMotionHint, Button1Motion, Button2Motion, Button3Motion, Button4Motion, Button5Motion, ButtonMotion, Exposure, VisibilityChange, StructureNotify, ResizeRedirect, SubstructureNotify, SubstructureRedirect, FocusChange, PropertyChange, ColormapChange, KeymapState}
POINTEREVENT	{ButtonPress, ButtonRelease, EnterWindow, LeaveWindow, PointerMotion, PointerMotionHint, Button1Motion, Button2Motion, Button3Motion, Button4Motion, Button5Motion, ButtonMotion, KeymapState}
DEVICEEVENT	{KeyPress, KeyRelease, ButtonPress, ButtonRelease, PointerMotion, Button1Motion, Button2Motion, Button3Motion, Button4Motion, Button5Motion, ButtonMotion}
KEYSYM	32-bit value (top three bits guaranteed to be zero)
KEYCODE	CARD8
BUTTON	CARD8
KEYMASK	{Shift, Lock, Control, Mod1, Mod2, Mod3, Mod4, Mod5}
BUTMASK	{Button1, Button2, Button3, Button4, Button5}
KEYBUTMASK	KEYMASK or BUTMASK
STRING8	LISTofCARD8
STRING16	LISTofCHAR2B
CHAR2B	[byte1, byte2: CARD8]
POINT	[x, y: INT16]
RECTANGLE	[x, y: INT16, width, height: CARD16]
ARC	[x, y: INT16, width, height: CARD16, angle1, angle2: INT16]
HOST	[family: {Internet, DECnet, Chaos} address: LISTofBYTE]

The [x,y] coordinates of a RECTANGLE specify the upper-left corner.

The primary interpretation of large characters in a STRING16 is that they are composed of two bytes used to index a 2-D matrix; hence, the use of CHAR2B rather than CARD16. This corresponds to the JIS/ISO method of indexing 2-byte characters. It is expected that most large fonts will be defined with 2-byte matrix indexing. For large fonts constructed with linear indexing, a CHAR2B can be interpreted as a 16-bit number by treating byte1 as the most-significant byte. This means that clients should always transmit such 16-bit character values most-significant byte first, as the server will never byte-swap CHAR2B quantities.

The length, format and interpretation of a HOST address are specific to the family (see *ChangeHosts* request).

Introduction Predefined Atoms

2.4 Predefined Atoms

Predefined atoms are not strictly necessary and may not be useful in all environments, but they will eliminate many *InternAtom* requests in most applications. Note that they are predefined only in the sense of having numeric values, not in the sense of having required semantics. The core protocol imposes no semantics on these names, but semantics are specified in other X Consortium standards, such as the **ICCCM** specification and the **XLFD** specification.

The following names have predefined atom values. Note that upper case and lower case matter.

ARC	ITALIC_ANGLE	STRING
ATOM	MAX_SPACE	SUBSCRIPT_X
BITMAP	MIN_SPACE	SUBSCRIPT_Y
CAP_HEIGHT	NORM_SPACE	SUPERSCRIPT_X
CARDINAL	NOTICE	SUPERSCRIPT_Y
COLORMAP	PIXMAP	UNDERLINE_POSITION
COPYRIGHT	POINT	UNDERLINE_THICKNESS
CURSOR	POINT_SIZE	VISUALID
CUT_BUFFER0	PRIMARY	WEIGHT
CUT_BUFFER1	QUAD_WIDTH	WINDOW
CUT_BUFFER2	RECTANGLE	WM_CLASS
CUT_BUFFER3	RESOLUTION	WM_CLIENT_MACHINE
CUT_BUFFER4	RESOURCE_MANAGER	WM_COMMAND
CUT_BUFFER5	RGB_BEST_MAP	WM_HINTS
CUT_BUFFER6	RGB_BLUE_MAP	WM_ICON_NAME
CUT_BUFFER7	RGB_COLOR_MAP	WM_ICON_SIZE
DRAWABLE	RGB_DEFAULT_MAP	WM_NAME
END_SPACE	RGB_GRAY_MAP	WM_NORMAL_HINTS
FAMILY_NAME	RGB_GREEN_MAP	WM_SIZE_HINTS
FONT	RGB_RED_MAP	WM_TRANSIENT_FOR
FONT_NAME	SECONDARY	WM_ZOOM_HINTS
FULL_NAME	STRIKEOUT_ASCENT	X_HEIGHT
INTEGER		STRIKEOUT_DESCENT

2.4.1 Private Atoms

To avoid conflicts with possible future names for which semantics might be imposed (either at the protocol level or in terms of higher level user interface models), names beginning with an underscore should be used for atoms that are private to a particular vendor or organization. To guarantee no conflicts between vendors and organizations, additional prefixes need to be used. However, the protocol does not define the mechanism for choosing such prefixes. For names private to a single application or end user but stored in globally accessible locations, it is suggested that two leading underscores be used to avoid conflicts with other names.

Introduction

Chapter 3 Protocol Overview

For remote clients, the X Protocol can be built on top of any reliable byte stream. For local clients, the way protocol information is passed depends on the inter-process communication channel the client and server use. The protocol defines a convention on byte-ordering (see Section 3.3) for byte transfers. However, fields of data items are also byte-aligned to ensure efficient processing if client and server exchange items over a 32-bit data path.

3.1 Data Formats

Clients send requests to servers. Servers respond by sending replies or errors to the client. A server can also send an event to the client asynchronously to any request. A client request can specify whether the client wishes to receive certain types of event.

Unused bytes in any data item are not guaranteed to be zero.

For the exact organization of each data item, and for the exact values of item identifiers (such as request opcode and event number), see Appendix B.

3.1.1 Request Format

Every request contains an 8-bit major opcode and a 16-bit length field expressed in units of four bytes. Every request consists of four bytes of a header (containing the major opcode, the length field, and a data byte) followed by zero or more additional bytes of data. The length field defines the total length of the request, including the header. The length field in a request must equal the minimum length required to contain the request. If the specified length is smaller or larger than the required length, an error is generated. Unused bytes in a request are not required to be zero. Major opcodes 128 through 255 are reserved for extensions. Extensions are intended to contain multiple requests, so extension requests typically have an additional minor opcode encoded in the "spare" data byte in the request header. However, the placement and interpretation of this minor opcode and of all other fields in extension requests are not defined by the core protocol. Every request on a given connection is implicitly assigned a sequence number, starting with one, that is used in replies, errors and events.

3.1.2 Reply Format

Every reply contains a 32-bit length field expressed in units of four bytes. Every reply consists of 32 bytes followed by zero or more additional bytes of data, as specified in the length field. Unused bytes within a reply are not guaranteed to be zero. Every reply also contains the least-significant 16 bits of the sequence number of the corresponding request.

Data Formats Protocol Overview

3.1.3 Error Format

Error reports are 32 bytes long. Every error includes an 8-bit error code. Error codes 128 through 255 are reserved for extensions. Every error also includes the major and minor opcodes of the failed request and the least-significant 16 bits of the sequence number of the request. For the following errors (see Chapter 3), the failing resource ID is also returned: *Colormap, Cursor, Drawable, Font, GContext, IDChoice, Pixmap* and *Window.* For *Atom* errors, the failing atom is returned. For *Value* errors, the failing value is returned. Other core errors return no additional data. Unused bytes within an error are not guaranteed to be zero.

3.1.4 Event Format

Events are 32 bytes long. Unused bytes within an event are not guaranteed to be zero. Every event contains an 8-bit type code. The most-significant bit in this code is set if the event was generated from a *SendEvent* request. Event codes 64 through 127 are reserved for extensions, although the core protocol does not define a mechanism for selecting interest in such events. Every core event (with the exception of *KeymapNotify*) also contains the least-significant 16 bits of the sequence number of the last request issued by the client that was (or is currently being) processed by the server.

Protocol Overview Input Devices

3.2 Input Devices

3.2.1 Keyboards

A KEYCODE represents a physical (or logical) key. Keycodes lie in the inclusive range [8,255]. A keycode value carries no intrinsic information, although server implementors may attempt to encode geometry information (for example, matrix) to be interpreted in a server-dependent fashion. The mapping between keys and keycodes cannot be changed using the protocol.

A KEYSYM is an encoding of a symbol on the cap of a key. The set of defined KEYSYMs include the character sets Latin 1, Latin 2, Latin 3, Latin 4, Kana, Arabic, Cyrillic, Greek, Tech, Special, Publish, APL and Hebrew as well as a set of symbols common on keyboards (Return, Help, Tab, and so on). KEYSYMs with the most-significant bit (of the 29 bits) set are reserved as vendor-specific.

A list of KEYSYMs is associated with each KEYCODE. The list is intended to convey the set of symbols on the corresponding key. If the list (ignoring trailing NoSymbol entries) is a single KEYSYM "K", then the list is treated as if it were the list "K NoSymbol K NoSymbol". If the list (ignoring trailing NoSymbol entries) is a pair of KEYSYMs "K1 K2", then the list is treated as if it were the list "K1 K2 K1 K2". If the list (ignoring trailing NoSymbol entries) is a triple of KEYSYMs "K1 K2 K3", then the list is treated as if it were the list "K1 K2 K3 NoSymbol". When an explicit "void" element is desired in the list, the value VoidSymbol can be used.

The first four elements of the list are split into two groups of KEYSYMs. Group 1 contains the first and second KEYSYMs, Group 2 contains the third and fourth KEYSYMs. Within each group, if the second element of the group is NoSymbol, then the group should be treated as if the second element were the same as the first element, except when the first element is an alphabetic KEYSYM "K" for which both lower-case and upper-case forms are defined. In that case, the group should be treated as if the first element were the lower-case form of "K" and the second element were the upper-case form of "K".

The standard rules for obtaining a KEYSYM from a *KeyPress* event make use of only the Group 1 and Group 2 KEYSYMs; no interpretation of other KEYSYMs in the list is defined. The modifier state determines which group to use. Switching between groups is controlled by the KEYSYM named MODE SWITCH, by attaching that KEYSYM to some KEYCODE and attaching that KEYCODE to any one of the modifiers Mod1 through Mod5. This modifier is called the "group modifier". For any KEYCODE, Group 1 is used when the group modifier is off, and Group 2 is used when the group modifier is on.

Within a group, the modifier state determines which KEYSYM to use. The first KEYSYM is used when the Shift and Lock modifiers are off. The second KEYSYM is used when the Shift modifier is on, or when the Lock modifier is on and the second KEYSYM is upper-case alphabetic, or when the Lock modifier is on and is interpreted as ShiftLock. Otherwise, when the Lock modifier is on and is interpreted as CapsLock, the state of the Shift modifier is applied first to select a KEYSYM; but if that KEYSYM is lower-case alphabetic, then the corresponding upper-case KEYSYM is used instead.

The mapping between KEYCODEs and KEYSYMs is not used directly by the server; it is merely stored for reading and writing by clients.

The KEYMASK modifier named Lock is intended to be mapped to either a CapsLock or a ShiftLock key, but which one is left as application-specific and/or user-specific. However, it is suggested that the determination be made according to the associated KEYSYM(s) of the corresponding KEYCODE.

Input Devices Protocol Overview

3.2.2 Pointers

Buttons are always numbered starting with one.

Protocol Overview Connection Setup

3.3 Connection Setup

For remote clients, the X protocol can be built on top of any reliable byte stream.

3.3.1 Connection Initiation

The client must send an initial byte of data to identify the byte order to be employed. The value of the byte must be octal 102 or 154. The value 102 (ASCII upper-case B) means values are transmitted most-significant byte first, and value 154 (ASCII lower-case l) means values are transmitted least-significant byte first. Except where explicitly noted in the protocol, all 16-bit and 32-bit quantities sent by the client must be transmitted with this byte order, and all 16-bit and 32-bit quantities returned by the server will be transmitted with this byte order.

Following the byte-order byte, the client sends the following information at connection setup:

```
protocol-major-version: CARD16
protocol-minor-version: CARD16
authorization-protocol-name: STRING8
authorization-protocol-data: STRING8
```

The version numbers indicate what version of the protocol the client expects the server to implement.

The authorization name indicates what authorization protocol the client expects the server to use, and the data is specific to that protocol. Specification of valid authorization mechanisms is not part of the core X protocol. It is hoped that eventually one authorization protocol will be agreed upon. In the meantime, a server that implements a different protocol than the client expects or that only implements the host-based mechanism may simply ignore this information. If both name and data strings are empty, this is to be interpreted as "no explicit authorization".

3.3.2 Server Response

The client receives the following information at connection setup:

```
success: BOOL
protocol-major-version: CARD16
protocol-minor-version: CARD16
length: CARD16
```

Length is the amount of additional data to follow, in units of four bytes. The version numbers are an escape hatch in case future revisions of the protocol are necessary. In general, the major version would increment for incompatible changes, and the minor version would increment for small upward compatible changes. Barring changes, the major version will be 11, and the minor version will be 0. The protocol version numbers returned indicate the protocol the server actually supports. This might not equal the version sent by the client. The server can (but need not) refuse connections from clients that offer a different version than the server supports. A server can (but need not) support more than one version simultaneously.

The client receives the following additional data if authorization fails:

```
reason: STRING8
```

The client receives the following additional data if authorization is accepted:

Connection Setup Protocol Overview

```
vendor: STRING8
  release-number: CARD32
  resource-id-base, resource-id-mask: CARD32
  image-byte-order: {LSBFirst, MSBFirst}
  bitmap-scanline-unit: {8, 16, 32}
  bitmap-scanline-pad: {8, 16, 32}
  bitmap-bit-order: {LeastSignificant, MostSignificant}
  pixmap-formats: LISTofFORMAT
  roots: LISTofSCREEN
  motion-buffer-size: CARD32
  maximum-request-length: CARD16
  min-keycode, max-keycode: KEYCODE
where:
  FORMAT:
              [depth: CARD8,
               bits-per-pixel: {1, 4, 8, 16, 24, 32}
               scanline-pad: {8, 16, 32}]
              froot: WINDOW
  SCREEN:
               width-in-pixels, height-in-pixels: CARD16
               width-in-millimeters, height-in-millimeters: CARD16
               allowed-depths: LISTofDEPTH
               root-depth: CARD8
               root-visual: VISUALID
               default-colormap: COLORMAP
               white-pixel, black-pixel: CARD32
               min-installed-maps, max-installed-maps: CARD16 {Never,
                    WhenMapped, Always \
               save-unders: BOOL
               current-input-masks: SETofEVENT]
  DEPTH:
              [depth: CARD8
               visuals: LISTofVISUALTYPEl
  VISUALTYPE: [visual-id: VISUALID
               class:
               {StaticGray, StaticColor, TrueColor,
                   GrayScale, PseudoColor, DirectColor}
               red-mask, green-mask, blue-mask: CARD32
               bits-per-rgb-value: CARD8
               colormap-entries: CARD16]
```

3.3.3 Server Information

The information that is global to the server is as follows.

The vendor string gives some identification of the owner of the server implementation. The vendor controls the semantics of the release number.

The resource-id-mask contains a single contiguous set of bits (at least 18). The client allocates resource IDs for types WINDOW, PIXMAP, CURSOR, FONT, GCONTEXT and COLORMAP by choosing a value with only some subset of these bits set and ORing it with resource-id-base. Only values constructed in this way can be used to name newly created resources over this connection. Resource IDs never have the top three bits set. The client is not restricted to linear

Protocol Overview Connection Setup

or contiguous allocation of resource IDs. Once an ID has been freed, it can be reused, but this should not be necessary. An ID must be unique with respect to the IDs of all other resources, not just other resources of the same type. However, note that the value spaces of resource identifiers, atoms, visualids, and keysyms are distinguished by context, and as such, are not required to be disjoint; for example, a given numeric value might be both a valid window ID, a valid atom, and a valid keysym.

Although the server is in general responsible for byte-swapping data to match the client, images are always transmitted and received in formats (including byte order) specified by the server. The byte order for images is given by image-byte-order and applies to each scanline unit in XY format (bitmap format) and to each pixel value in Z format.

A bitmap is represented in scanline order. Each scanline is padded to a multiple of bits as given by bitmap-scanline-pad. The pad bits are of arbitrary value. The scanline is quantized in multiples of bits as given by bitmap-scanline-unit. The bitmap-scanline-unit is always less than or equal to the bitmap-scanline-pad. Within each unit, the leftmost bit in the bitmap is either the least-significant or most-significant bit in the unit, as given by bitmap-bit-order. If a pixmap is represented in XY format, each plane is represented as a bitmap, and the planes appear from most-significant to least-significant in bit order with no padding between planes.

Pixmap-formats contains one entry for each depth value. The entry describes the Z format used to represent images of that depth. An entry for a depth is included if any screen supports that depth, and all screens supporting that depth must support only that Z format for that depth. In Z format, the pixels are in scanline order, left to right within a scanline. The number of bits used to hold each pixel is given by bits-per-pixel. Bits-per-pixel may be larger than strictly required by the depth, in which case the least-significant bits are used to hold the pixmap data, and the values of the unused high-order bits are undefined. When the bits-per-pixel is 4, the order of nibbles in the byte is the same as the image byte-order. When the bits-per-pixel is 1, the format is identical for bitmap format. Each scanline is padded to a multiple of bits as given by scanline-pad. When bits-per-pixel is 1, this will be identical to bitmap-scanline-pad.

How a pointing device roams the screens is up to the server implementation and is transparent to the protocol. No geometry is defined among screens.

The server may retain the recent history of pointer motion and do so to a finer granularity than is reported by *MotionNotify* events. The *GetMotionEvents* request makes such history available. The motion-buffer-size gives the approximate maximum number of elements in the history buffer.

Maximum-request-length specifies the maximum length of a request accepted by the server, in 4-byte units. That is, length is the maximum value that can appear in the length field of a request. Requests larger than this maximum generate a *Length* error, and the server will read and simply discard the entire request. Maximum-request-length will always be at least 4096 (that is, requests of length up to and including 16384 bytes will be accepted by all servers).

Min-keycode and max-keycode specify the smallest and largest keycode values transmitted by the server. Min-keycode is never less than 8, and max-keycode is never greater than 255. Not all keycodes in this range are required to have corresponding keys.

Connection Setup Protocol Overview

3.3.4 Screen Information

The information that applies per screen is as follows.

The allowed-depths specifies what pixmap and window depths are supported. Pixmaps are supported for each depth listed, and windows of that depth are supported if at least one visual type is listed for the depth. A pixmap depth of one is always supported and listed, but windows of depth one might not be supported. A depth of zero is never listed, but zero-depth *InputOnly* windows are always supported.

Root-depth and root-visual specify the depth and visual type of the root window. Width-in-pixels and height-in-pixels specify the size of the root window (which cannot be changed). The class of the root window is always *InputOutput*. Width-in-millimeters and height-in-millimeters can be used to determine the physical size and the aspect ratio.

The default-colormap is the one initially associated with the root window. Clients with minimal color requirements creating windows of the same depth as the root may want to allocate from this map by default.

Black-pixel and white-pixel can be used in implementing a monochrome application. These pixel values are for permanently allocated entries in the default-colormap. The actual RGB values may be settable on some screens and, in any case, may not actually be black and white. The names are intended to convey the expected relative intensity of the colors.

The border of the root window is initially a pixmap filled with the black-pixel. The initial background of the root window is a pixmap filled with some unspecified two-color pattern using black-pixel and white-pixel.

Min-installed-maps specifies the number of maps that can be guaranteed to be installed simultaneously (with *InstallColormap*), regardless of the number of entries allocated in each map. Max-installed-maps specifies the maximum number of maps that might possibly be installed simultaneously, depending on their allocations. Multiple static-visual colormaps with identical contents but differing in resource ID should be considered as a single map for the purposes of this number. For the typical case of a single hardware colormap, both values will be 1.

Backing-stores indicates when the server supports backing stores for this screen, although it may be storage limited in the number of windows it can support at once. If save-unders is *True*, the server can support the save-under mode in *CreateWindow* and *ChangeWindowAttributes*, although again it may be storage limited.

The current-input-events is what *GetWindowAttributes* would return for the all-event-masks for the root window.

3.3.5 Visual Information

The information that applies per visual-type is as follows.

A given visual type might be listed for more than one depth or for more than one screen.

For *PseudoColor*, a pixel value indexes a colormap to produce independent RGB values; the RGB values can be changed dynamically. *GrayScale* is treated in the same way as *PseudoColor* except which primary drives the screen is undefined; thus, the client should always store the same value for red, green and blue in colormaps. For *DirectColor*, a pixel value is decomposed into separate RGB subfields, and each subfield separately indexes the colormap for the corresponding value. The RGB values can be changed dynamically. *TrueColor* is treated in the same way as *DirectColor* except the colormap has predefined read-only RGB values. These values are server-dependent but provide linear or near-linear increasing ramps in each primary. *StaticColor* is treated in the same way as *PseudoColor* except the colormap has predefined read-

Protocol Overview Connection Setup

only RGB values, which are server-dependent. *StaticGray* is treated in the same way as *StaticColor* except the red, green, and blue values are equal for any single pixel value, resulting in shades of gray. *StaticGray* with a two-entry colormap can be thought of as monochrome.

The red-mask, green-mask and blue-mask are only defined for *DirectColor* and *TrueColor*. Each has one contiguous set of bits set to 1 with no intersections. Usually each mask has the same number of bits set to 1.

The bits-per-rgb-value specifies the log base 2 of the number of distinct color intensity values (individually) of red, green and blue. This number need not bear any relation to the number of colormap entries. Actual RGB values are always passed in the protocol within a 16-bit spectrum, with 0 being minimum intensity and 65535 being the maximum intensity. On hardware that provides a linear zero-based intensity ramp, the following relationship exists:

```
hw-intensity = protocol-intensity / (65536 / total-hw-intensities)
```

Colormap entries are indexed from 0. The colormap-entries defines the number of available colormap entries in a newly created colormap. For *DirectColor* and *TrueColor*, this will usually be 2 to the power of the maximum number of bits set to 1 in red-mask, green-mask and blue-mask.

Connection Close Protocol Overview

3.4 Connection Close

At connection close, all event selections made by the client are discarded. If the client has the pointer actively grabbed, an *UngrabPointer* is performed. If the client has the keyboard actively grabbed, an *UngrabKeyboard* is performed. All passive grabs by the client are released. If the client has the server grabbed, an *UngrabServer* is performed. All selections (see *SetSelectionOwner* request) owned by the client are disowned. If close-down mode (see *SetCloseDownMode* request) is *RetainPermanent* or *RetainTemporary*, then all resources (including colormap entries) allocated by the client are marked as permanent or temporary, respectively (but this does not prevent other clients from explicitly destroying them). If the mode is *Destroy*, all of the client's resources are destroyed.

When a client's resources are destroyed, for each window in the client's save-set, if the window is an inferior of a window created by the client, the save-set window is reparented to the closest ancestor such that the save-set window is not an inferior of a window created by the client. If the save-set window is unmapped, a *MapWindow* request is performed on it (even if it was not an inferior of a window created by the client). The reparenting leaves unchanged the absolute coordinates (with respect to the root window) of the upper-left outer corner of the save-set window. After save-set processing, all windows created by the client are destroyed. For each nonwindow resource created by the client, the appropriate *Free* request is performed. All colors and colormap entries allocated by the client are freed.

A server goes through a cycle of having no connections and having some connections. At every transition to the state of having no connections as a result of a connection closing with a *Destroy* close-down mode, the server resets its state as if it had just been started. This starts by destroying all lingering resources from clients that have terminated in *RetainPermanent* or *RetainTemporary* mode. It additionally includes deleting all but the predefined atom identifiers, deleting all properties on all root windows, resetting all device maps and attributes (key click, bell volume, acceleration), resetting the access control list, restoring the standard root tiles and cursors, restoring the default font path, and restoring the input focus to state *PointerRoot*.

Note that closing a connection with a close-down mode of *RetainPermanent* or *RetainTemporary* will not cause the server to reset.

Protocol Overview Errors

3.5 Errors

In general, when a request terminates with an error, the request has no side effects (that is, there is no partial execution). The only requests for which this is not true are *ChangeWindowAttributes*, *ChangeGC*, *PolyText8*, *PolyText16*, *FreeColors*, *StoreColors* and *ChangeKeyboardControl*.

The following error codes result from various requests as follows:

Error	Description
Access	An attempt is made to grab a key/button combination already grabbed by another client.
	An attempt is made to free a colormap entry not allocated by the client, or to free an entry in a colormap that was created with all entries writable.
	An attempt is made to store into a read-only or an unallocated colormap entry.
	An attempt is made to modify the access control list from other than the local host (or otherwise authorized client).
Alloc	An attempt is made to select an event type that only one client can select at a time when another client has already selected it. The server failed to allocate the requested resource. Note that the explicit listing of <i>Alloc</i> errors in request only covers allocation errors at a very coarse level and is not intended to cover all cases of a server running out of allocation space in the middle of service. The semantics when a server runs out of allocation space are left unspecified, but a server may generate an <i>Alloc</i> error on any request for this reason, and clients should be prepared to receive such errors and handle or discard them.
Atom	A value for an ATOM argument does not name a defined ATOM.
Colormap	A value for a COLORMAP argument does not name a defined COLORMAP.
Cursor	A value for a CURSOR argument does not name a defined CURSOR.
Drawable	A value for a DRAWABLE argument does not name a defined WINDOW or PIXMAP.
Font	A value for a FONT argument does not name a defined FONT.
	A value for a FONTABLE argument does not name a defined FONT or a defined GCONTEXT.
GContext	A value for a GCONTEXT argument does not name a defined GCONTEXT.
IDChoice	The value chosen for a resource identifier either is not included in the range assigned to the client or is already in use.
Implementation	The server does not implement some aspect of the request. A server that generates this error for a core request is deficient. As such, this error is not listed for any of the requests, but clients should be prepared to receive such errors and handle or discard them.

Errors Protocol Overview

Error	Description
Length	The length of a request is shorter or longer than that required to minimally contain the arguments.
	The length of a request exceeds the maximum length accepted by the server.
Match	An <i>InputOnly</i> window is used as a DRAWABLE.
	In a graphics request, the GCONTEXT argument does not have the same root and depth as the destination DRAWABLE argument.
	Some argument (or pair of arguments) has the correct type and range, but it fails to match in some other way required by the request.
Name	A font or color of the specified name does not exist.
Pixmap	A value for a PIXMAP argument does not name a defined PIXMAP.
Request	The major or minor opcode does not specify a valid request.
Value	Some numeric value falls outside the range of values accepted by the request. Unless a specific range is specified for an argument, the full range defined by the argument's type is accepted. Any argument defined as a set of alternatives typically can generate this error (due to the encoding).
Window	A value for a WINDOW argument does not name a defined WINDOW.

Note: The *Atom, Colormap, Cursor, Drawable, Font, GContext, Pixmap* and *Window* errors are also used when the argument type is extended by union with a set of fixed alternatives; for example, <WINDOW or *PointerRoot* or *None*>.

3.6 Flow Control and Concurrency

Whenever the server is writing to a given connection, it is permissible for the server to stop reading from that connection (but if the writing would block, it must continue to service other connections). The server is not required to buffer more than a single request per connection at one time. For a given connection to the server, a client can block while reading from the connection but should undertake to read (events and errors) when writing would block. Failure on the part of a client to obey this rule could result in a deadlocked connection, although deadlock is probably unlikely unless either the transport layer has very little buffering or the client attempts to send large numbers of requests without ever reading replies or checking for errors and events.

Whether or not a server is implemented with internal concurrency, the overall effect must be as if individual requests are executed to completion in some serial order, and requests from a given connection must be executed in delivery order (that is, the total execution order is a shuffle of the individual streams). The execution of a request includes validating all arguments, collecting all data for any reply, and generating and queueing all required events. However, it does not include the actual transmission of the reply and the events. In addition, the effect of any other cause that can generate multiple events (for example, activation of a grab or pointer motion) must effectively generate and queue all required events indivisibly with respect to all other causes and requests. For a request from a given client, any events destined for that client that are caused by executing the request must be sent to the client before any reply or error is sent.

Protocol Overview

Chapter 4 Requests

AllocColor

```
cmap: COLORMAP
red, green, blue: CARD16
=>
pixel: CARD32
red, green, blue: CARD16
Errors: Alloc, Colormap
```

This request allocates a read-only colormap entry corresponding to the closest RGB values provided by the hardware. It also returns the pixel and the RGB values actually used. Multiple clients requesting the same effective RGB values can be assigned the same read-only entry, allowing entries to be shared.

AllocColorCells

```
cmap: COLORMAP
colors, planes: CARD16
contiguous: BOOL
=>
pixels, masks: LISTofCARD32
Errors: Alloc, Colormap, Value
```

The number of colors must be positive, and the number of planes must be nonnegative (or a *Value* error results). If C colors and P planes are requested, then C pixels and P masks are returned. No mask will have any bits in common with any other mask or with any of the pixels. By ORing together masks and pixels, C* 2^P distinct pixels can be produced; all of these are allocated writable by the request. For *GrayScale* or *PseudoColor*, each mask will have exactly one bit set to 1; for *DirectColor*, each will have exactly three bits set to 1. If contiguous is *True* and if all masks are ORed together, a single contiguous set of bits will be formed for *GrayScale* or *PseudoColor*, and three contiguous sets of bits (one within each pixel subfield) for *DirectColor*. The RGB values of the allocated entries are undefined.

AllocColorPlanes

```
cmap: COLORMAP
colors, reds, greens, blues: CARD16
contiguous: BOOL

=>
pixels: LISTofCARD32
red-mask, green-mask, blue-mask: CARD32

Errors: Alloc, Colormap, Value
```

The number of colors must be positive, and the reds, greens and blues must be nonnegative (or a *Value* error results). If C colors, R reds, G greens and B blues are requested, then C pixels are returned, and the masks have R, G and B bits set, respectively. If contiguous is *True*, then each mask will have a contiguous set of bits. No mask will have any bits in common with any other mask or with any of the pixels. For *DirectColor*, each mask will lie within the corresponding pixel subfield. By ORing together subsets of masks with pixels, $C^* 2^{R+G+B}$ distinct pixels can be produced; all of these are allocated writable by the request. The initial RGB values of the allocated entries are undefined. In the colormap, there are only $C^* 2^R$ independent red entries, $C^* 2^G$ independent green entries, and $C^* 2^B$ independent blue entries. This is true even for *PseudoColor*. When the colormap entry for a pixel value is changed using *StoreColors* or *StoreNamedColor*, the pixel is decomposed according to the masks and the corresponding independent entries are updated.

AllocNamedColor

```
cmap: COLORMAP
name: STRING8

=>

pixel: CARD32
exact-red, exact-green, exact-blue: CARD16
visual-red, visual-green, visual-blue: CARD16
Errors: Alloc, Colormap, Name
```

This request looks up the named color with respect to the screen associated with the colormap. Then, it does an *AllocColor* on cmap. The name should use the ISO Latin-1 encoding, and upper case and lower case do not matter. The exact RGB values specify the true values for the color, and the visual values specify the values actually used in the colormap.

AllowEvents

This request releases some queued events if the client has caused a device to freeze. The request has no effect if the specified time is earlier than the last-grab time of the most recent active grab

for the client or if the specified time is later than the current server time.

For *AsyncPointer*, if the pointer is frozen by the client, pointer event processing continues normally. If the pointer is frozen twice by the client on behalf of two separate grabs, *AsyncPointer* thaws for both. *AsyncPointer* has no effect if the pointer is not frozen by the client, but the pointer need not be grabbed by the client.

For *SyncPointer*, if the pointer is frozen and actively grabbed by the client, pointer event processing continues normally until the next *ButtonPress* or *ButtonRelease* event is reported to the client, at which time the pointer again appears to freeze. However, if the reported event causes the pointer grab to be released, then the pointer does not freeze. *SyncPointer* has no effect if the pointer is not frozen by the client or if the pointer is not grabbed by the client.

For *ReplayPointer*, if the pointer is actively grabbed by the client and is frozen as the result of an event having been sent to the client (either from the activation of a *GrabButton* or from a previous *AllowEvents* with mode *SyncPointer* but not from a *GrabPointer*), then the pointer grab is released and that event is completely reprocessed, this time ignoring any passive grabs at or above (towards the root) the grab-window of the grab just released. The request has no effect if the pointer is not grabbed by the client or if the pointer is not frozen as the result of an event.

For *AsyncKeyboard*, if the keyboard is frozen by the client, keyboard event processing continues normally. If the keyboard is frozen twice by the client on behalf of two separate grabs, *AsyncKeyboard* thaws for both. *AsyncKeyboard* has no effect if the keyboard is not frozen by the client, but the keyboard need not be grabbed by the client.

For *SyncKeyboard*, if the keyboard is frozen and actively grabbed by the client, keyboard event processing continues normally until the next *KeyPress* or *KeyRelease* event is reported to the client, at which time the keyboard again appears to freeze. However, if the reported event causes the keyboard grab to be released, then the keyboard does not freeze. *SyncKeyboard* has no effect if the keyboard is not frozen by the client or if the keyboard is not grabbed by the client.

For *ReplayKeyboard*, if the keyboard is actively grabbed by the client and is frozen as the result of an event having been sent to the client (either from the activation of a *GrabKey* or from a previous *AllowEvents* with mode *SyncKeyboard* but not from a *GrabKeyboard*), then the keyboard grab is released and that event is completely reprocessed, this time ignoring any passive grabs at or above (towards the root) the grab-window of the grab just released. The request has no effect if the keyboard is not grabbed by the client or if the keyboard is not frozen as the result of an event.

For *SyncBoth*, if both pointer and keyboard are frozen by the client, event processing (for both devices) continues normally until the next *ButtonPress*, *ButtonRelease*, *KeyPress* or *KeyRelease* event is reported to the client for a grabbed device (button event for the pointer, key event for the keyboard), at which time the devices again appear to freeze. However, if the reported event causes the grab to be released, then the devices do not freeze (but if the other device is still grabbed, then a subsequent event for it will still cause both devices to freeze). *SyncBoth* has no effect unless both pointer and keyboard are frozen by the client. If the pointer or keyboard is frozen twice by the client on behalf of two separate grabs, *SyncBoth* thaws for both (but a subsequent freeze for *SyncBoth* will only freeze each device once).

For *AsyncBoth*, if the pointer and the keyboard are frozen by the client, event processing for both devices continues normally. If a device is frozen twice by the client on behalf of two separate grabs, *AsyncBoth* thaws for both. *AsyncBoth* has no effect unless both pointer and keyboard are frozen by the client.

AsyncPointer, SyncPointer and ReplayPointer have no effect on processing of keyboard events. AsyncKeyboard, SyncKeyboard and ReplayKeyboard have no effect on processing of pointer events.

It is possible for both a pointer grab and a keyboard grab to be active simultaneously (by the same or different clients). When a device is frozen on behalf of either grab, no event processing is performed for the device. It is possible for a single device to be frozen because of both grabs. In this case, the freeze must be released on behalf of both grabs before events can again be processed. If a device is frozen twice by a single client, then a single *AllowEvents* releases both.

Bell

```
percent: INT8
Errors: Value
```

This request rings the bell on the keyboard at a volume relative to the base volume for the keyboard, if possible. Percent can range from -100 to 100 inclusive (or a *Value* error results). The volume at which the bell is rung when percent is nonnegative is:

```
base - [(base * percent) / 100] + percent
When percent is negative, it is:
base + [(base * percent) / 100]
```

ChangeActivePointerGrab

```
event-mask: SETofPOINTEREVENT
cursor: CURSOR or None
time: TIMESTAMP or CurrentTime
Errors: Cursor, Value
```

This request changes the specified dynamic parameters if the pointer is actively grabbed by the client and the specified time is no earlier than the last-pointer-grab time and no later than the current server time. The interpretation of event-mask and cursor are the same as in *GrabPointer*. This request has no effect on the parameters of any passive grabs established with *GrabButton*.

ChangeGC

This request changes components in gc. The value-mask and value-list specify which components are to be changed. The values and restrictions are the same as for *CreateGC*.

Changing the clip-mask also overrides any previous *SetClipRectangles* request on the context. Changing dash-offset or dashes overrides any previous *SetDashes* request on the context.

The order in which components are verified and altered is server-dependent. If an error is generated, a subset of the components may have been altered.

ChangeHosts

```
mode: {Insert, Delete}
host: HOST

Errors: Access, Value
```

This request adds or removes the specified host from the access control list. When the access control mechanism is enabled and a host attempts to establish a connection to the server, the host must be in this list, or the server will refuse the connection.

The client must reside on the same host as the server and/or have been granted permission by a server-dependent method to execute this request (or an *Access* error results).

An initial access control list can usually be specified, typically by naming a file that the server reads at startup and reset.

The following address families are defined. A server is not required to support these families and may support families not listed here. Use of an unsupported family, an improper address format, or an improper address length within a supported family results in a *Value* error.

For the Internet family, the address must be four bytes long. The address bytes are in standard IP order; the server performs no automatic swapping on the address bytes. For a Class A address, the network number is the first byte in the address, and the host number is the remaining three bytes, most-significant byte first. For a Class B address, the network number is the first two bytes and the host number is the last two bytes, each most-significant byte first. For a Class C address, the network number is the first three bytes, most-significant byte first, and the last byte is the host number.

For the DECnet family, the server performs no automatic swapping on the address bytes. A Phase IV address is two bytes long: the first byte contains the least-significant eight bits of the node number, and the second byte contains the most-significant two bits of the node number in the least-significant two bits of the byte and the area in the most significant six bits of the byte.

For the Chaos family, the address must be two bytes long. The host number is always the first byte in the address, and the subnet number is always the second byte. The server performs no automatic swapping on the address bytes.

ChangeKeyboardControl

```
value-mask: BITMASK
value-list: LISTofVALUE
Errors: Match, Value
```

This request controls various aspects of the keyboard. The value-mask and value-list specify which controls are to be changed. The possible values are:

Control	Type
key-click-percent	INT8
bell-percent	INT8
bell-pitch	INT16
bell-duration	INT16
led	CARD8
led-mode	{On,Off}
key	KEYCODE
auto-repeat-mode	{On,Off,Default}

The key-click-percent sets the volume for key clicks between 0 (off) and 100 (loud) inclusive, if possible. Setting to −1 restores the default. Other negative values generate a *Value* error.

The bell-percent sets the base volume for the bell between 0 (off) and 100 (loud) inclusive, if possible. Setting to –1 restores the default. Other negative values generate a *Value* error.

The bell-pitch sets the pitch (specified in Hz) of the bell, if possible. Setting to -1 restores the default. Other negative values generate a *Value* error.

The bell-duration sets the duration of the bell (specified in milliseconds), if possible. Setting to –1 restores the default. Other negative values generate a *Value* error.

If both led-mode and led are specified, then the state of that LED is changed, if possible. If only led-mode is specified, then the state of all LEDs are changed, if possible. At most 32 LEDs, numbered from one, are supported. No standard interpretation of LEDs is defined. It is a *Match* error if an led is specified without an led-mode.

If both auto-repeat-mode and key are specified, then the auto-repeat mode of that key is changed, if possible. If only auto-repeat-mode is specified, then the global auto-repeat mode for the entire keyboard is changed, if possible, without affecting the per-key settings. It is a *Match* error if a key is specified without an auto-repeat-mode. Each key has an individual mode of whether or not it should auto-repeat and a default setting for that mode. In addition, there is a global mode of whether auto-repeat should be enabled or not and a default setting for that mode. When the global mode is *On*, keys should obey their individual auto-repeat modes. When the global mode is *Off*, no keys should auto-repeat. An auto-repeating key generates alternating *KeyPress* and *KeyRelease* events. When a key is used as a modifier, it is desirable for the key not to auto-repeat, regardless of the auto-repeat setting for that key.

A bell generator connected with the console but not directly on the keyboard is treated as if it were part of the keyboard.

The order in which controls are verified and altered is server-dependent. If an error is generated, a subset of the controls may have been altered.

ChangeKeyboardMapping

first-keycode: KEYCODE
keysyms-per-keycode: CARD8
keysyms: LISTofKEYSYM

Errors: Alloc, Value

This request defines the symbols for the specified number of keycodes, starting with the specified keycode. The symbols for keycodes outside this range remained unchanged. The number of elements in the keysyms list must be a multiple of keysyms-per-keycode (or a *Length* error results). The first-keycode must be greater than or equal to min-keycode as returned in the connection setup (or a *Value* error results) and:

```
first-keycode + (keysyms-length / keysyms-per-keycode) - 1
```

must be less than or equal to max-keycode as returned in the connection setup (or a *Value* error results). KEYSYM number N (counting from zero) for keycode K has an index (counting from zero) of:

```
(K - first-keycode) * keysyms-per-keycode + N
```

in keysyms. The keysyms-per-keycode can be chosen arbitrarily by the client to be large enough to hold all desired symbols. A special KEYSYM value of *NoSymbol* should be used to fill in unused elements for individual keycodes. It is legal for *NoSymbol* to appear in nontrailing positions of the effective list for a keycode.

This request generates a *MappingNotify* event.

There is no requirement that the server interpret this mapping; it is merely stored for reading and writing by clients (see Section 3.2.1).

ChangePointerControl

```
do-acceleration, do-threshold: BOOL
acceleration-numerator, acceleration-denominator: INT16
threshold: INT16
Errors: Value
```

This request defines how the pointer moves. The acceleration is a multiplier for movement expressed as a fraction. For example, specifying 3/1 means the pointer moves three times as fast as normal. The fraction can be rounded arbitrarily by the server. Acceleration only takes effect if the pointer moves more than threshold number of pixels at once and only applies to the amount beyond the threshold. Setting a value to -1 restores the default. Other negative values generate a *Value* error, as does a zero value for acceleration-denominator.

ChangeProperty

```
window: WINDOW
property, type: ATOM
format: {8, 16, 32}
mode: {Replace, Prepend, Append}
data: LISTofINT8 or LISTofINT16 or LISTofINT32
Errors: Alloc, Atom, Match, Value, Window
```

This request alters the property for the specified window. The type is uninterpreted by the server. The format specifies whether the data should be viewed as a list of 8-bit, 16-bit, or 32-bit quantities so that the server can correctly byte-swap as necessary.

If the mode is *Replace*, the previous property value is discarded. If the mode is *Prepend* or *Append*, then the type and format must match the existing property value (or a *Match* error results). If the property is undefined, it is treated as defined with the correct type and format with zero-length data. For *Prepend*, the data is tacked on to the beginning of the existing data, and for *Append*, it is tacked on to the end of the existing data.

This request generates a *PropertyNotify* event on the window.

The lifetime of a property is not tied to the storing client. Properties remain until explicitly deleted, until the window is destroyed, or until server reset (see Section 3.4).

The maximum size of a property is server-dependent and may vary dynamically.

ChangeSaveSet

```
window: WINDOW
mode: {Insert, Delete}
Errors: Match, Value, Window
```

This request adds or removes the specified window from the client's save-set. The window must have been created by some other client (or a *Match* error results). For further information about the use of the save-set, see Section 3.4.

When windows are destroyed, the server automatically removes them from the save-set.

ChangeWindowAttributes

The value-mask and value-list specify which attributes are to be changed. The values and restrictions are the same as for *CreateWindow*.

Setting a new background, whether by background-pixmap or background-pixel, overrides any previous background. Setting a new border, whether by border-pixel or border-pixmap, overrides any previous border.

Changing the background does not cause the window contents to be changed. Setting the border or changing the background such that the border tile origin changes causes the border to be repainted. Changing the background of a root window to *None* or *ParentRelative* restores the default background pixmap. Changing the border of a root window to *CopyFromParent* restores the default border pixmap.

Changing the win-gravity does not affect the current position of the window.

Changing the backing-store of an obscured window to *WhenMapped* or *Always* or changing the backing-planes, backing-pixel or save-under of a mapped window may have no immediate effect.

Multiple clients can select input on the same window; their event-masks are disjoint. When an event is generated, it will be reported to all interested clients. However, only one client at a time can select for *SubstructureRedirect*, only one client at a time can select for *ResizeRedirect*, and only one client at a time can select for *ButtonPress*. An attempt to violate these restrictions results in an *Access* error.

There is only one do-not-propagate-mask for a window, not one per client.

Changing the colormap of a window (by defining a new map, not by changing the contents of the existing map) generates a *ColormapNotify* event. Changing the colormap of a visible window might have no immediate effect on the screen (see *InstallColormap* request).

Changing the cursor of a root window to *None* restores the default cursor.

The order in which attributes are verified and altered is server-dependent. If an error is generated, a subset of the attributes may have been altered.

CirculateWindow

```
window: WINDOW
direction: {RaiseLowest, LowerHighest}
Errors: Value, Window
```

If some other client has selected *SubstructureRedirect* on the window, then a *CirculateRequest* event is generated, and no further processing is performed. Otherwise, the following is performed, and then a *CirculateNotify* event is generated if the window is actually restacked.

For *RaiseLowest*, *CirculateWindow* raises the lowest mapped child (if any) that is occluded by another child to the top of the stack. For *LowerHighest*, *CirculateWindow* lowers the highest mapped child (if any) that occludes another child to the bottom of the stack. Exposure processing is performed on formerly obscured windows.

ClearArea

```
window: WINDOW
x, y: INT16
width, height: CARD16
exposures: BOOL
Errors: Match, Value, Window
```

The x and y coordinates are relative to the window's origin and specify the upper-left corner of the rectangle. If width is zero, it is replaced with the current width of the window minus x. If height is zero, it is replaced with the current height of the window minus y. If the window has a defined background tile, the rectangle is tiled with a plane-mask of all ones and function of *Copy* and a subwindow-mode of *ClipByChildren*. If the window has background *None*, the contents of the window are not changed. In either case, if exposures is *True*, then one or more exposure events are generated for regions of the rectangle that are either visible or are being retained in a backing store.

It is a *Match* error to use an *InputOnly* window in this request.

CloseFont

```
font: FONT
Errors: Font
```

This request deletes the association between the resource ID and the font. The font itself will be freed when no other resource references it.

ConfigureWindow

```
window: WINDOW
value-mask: BITMASK
value-list: LISTofVALUE
Errors: Match, Value, Window
```

This request changes the configuration of the window. The value-mask and value-list specify which values are to be given. The possible values are:

Attribute	Туре
X	INT16
y	INT16
width	CARD16
height	CARD16
border-width	CARD16
sibling	WINDOW
stack-mode	{Above, Below, TopIf, BottomIf, Opposite}

The x and y coordinates are relative to the parent's origin and specify the position of the upperleft outer corner of the window. The width and height specify the inside size, not including the border, and must be non-zero (or a *Value* error results). Those values not specified are taken from the existing geometry of the window. Note that changing just the border-width leaves the outer-left corner of the window in a fixed position but moves the absolute position of the window's origin. It is a *Match* error to attempt to make the border-width of an *InputOnly* window non-zero.

If the override-redirect attribute of the window is *False* and some other client has selected *SubstructureRedirect* on the parent, a *ConfigureRequest* event is generated, and no further processing is performed. Otherwise, the following is performed:

If some other client has selected *ResizeRedirect* on the window and the inside width or height of the window is being changed, a *ResizeRequest* event is generated, and the current inside width and height are used instead. Note that the override-redirect attribute of the window has no effect on *ResizeRedirect* and that *SubstructureRedirect* on the parent has precedence over *ResizeRedirect* on the window.

The geometry of the window is changed as specified, the window is restacked among siblings, and a *ConfigureNotify* event is generated if the state of the window actually changes. If the inside width or height of the window has actually changed, then children of the window are affected, according to their win-gravity. Exposure processing is performed on formerly obscured windows (including the window itself and its inferiors if regions of them were obscured but now are not). Exposure processing is also performed on any new regions of the window (as a result of increasing the width or height) and on any regions where window contents are lost.

If the inside width or height of a window is not changed but the window is moved or its border is changed, then the contents of the window are not lost but move with the window. Changing the inside width or height of the window causes its contents to be moved or lost, depending on the bit-gravity of the window. It also causes children to be reconfigured, depending on their win-gravity. For a change of width and height of W and H, we define the [x, y] pairs as:

Direction	Deltas
NorthWest	[0, 0]
North	[W/2, 0]
NorthEast	[W, 0]
West	[0, H/2]
Center	[W/2, H/2]
East	[W, H/2]
SouthWest	[0, H]
South	[W/2, H]
SouthEast	[W, H]

When a window with one of these bit-gravities is resized, the corresponding pair defines the change in position of each pixel in the window. When a window with one of these win-gravities has its parent window resized, the corresponding pair defines the change in position of the

window within the parent. This repositioning generates a *GravityNotify* event. *GravityNotify* events are generated after the *ConfigureNotify* event is generated.

A gravity of *Static* indicates that the contents or origin should not move relative to the origin of the root window. If the change in size of the window is coupled with a change in position of [X, Y], then for bit-gravity the change in position of each pixel is [-X, -Y] and for win-gravity the change in position of a child when its parent is so resized is [-X, -Y]. Note that *Static* gravity still only takes effect when the width or height of the window is changed, not when the window is simply moved.

A bit-gravity of *Forget* indicates that the window contents are always discarded after a size change, even if backing-store or save-under has been requested. The window is tiled with its background (except, if no background is defined, the existing screen contents are not altered) and zero or more exposure events are generated.

The contents and borders of inferiors are not affected by their parent's bit-gravity. A server is permitted to ignore the specified bit-gravity and use *Forget* instead.

A win-gravity of *Unmap* is like *NorthWest*, but the child is also unmapped when the parent is resized, and an *UnmapNotify* event is generated. *UnmapNotify* events are generated after the *ConfigureNotify* event is generated.

If a sibling and a stack-mode are specified, the window is restacked as follows:

Above The window is placed just above the sibling.

Below The window is placed just below the sibling.

TopIf If the sibling occludes the window, then the window is placed at the top of the

stack.

BottomIf If the window occludes the sibling, then the window is placed at the bottom of the

stack.

Opposite If the sibling occludes the window, then the window is placed at the top of the

stack. Otherwise, if the window occludes the sibling, then the window is placed at

the bottom of the stack.

If a stack-mode is specified but no sibling is specified, the window is restacked as follows:

Above The window is placed at the top of the stack.

Below The window is placed at the bottom of the stack.

TopIf If any sibling occludes the window, then the window is placed at the top of the

stack.

BottomIf If the window occludes any sibling, then the window is placed at the bottom of the

stack.

Opposite If any sibling occludes the window, then the window is placed at the top of the

stack. Otherwise, if the window occludes any sibling, then the window is placed at

the bottom of the stack.

It is a Match error if a sibling is specified without a stack-mode or if the window is not actually a sibling.

Note that the computations for *BottomIf*, *TopIf* and *Opposite* are performed with respect to the window's final geometry (as controlled by the other arguments to the request), not to its initial geometry.

Attempts to configure a root window have no effect.

ConvertSelection

```
selection, target: ATOM
property: ATOM or None
requestor: WINDOW
time: TIMESTAMP or CurrentTime
Errors: Atom, Window
```

If the specified selection has an owner, the server sends a *SelectionRequest* event to that owner. If no owner for the specified selection exists, the server generates a *SelectionNotify* event to the requestor with property *None*. The arguments are passed on unchanged in either of the events.

CopyArea

```
src-drawable, dst-drawable: DRAWABLE
gc: GCONTEXT
src-x, src-y: INT16
width, height: CARD16
dst-x, dst-y: INT16
Errors: Drawable, GContext, Match
```

This request combines the specified rectangle of src-drawable with the specified rectangle of dst-drawable. The src-x and src-y coordinates are relative to src-drawable's origin. The dst-x and dst-y are relative to dst-drawable's origin, each pair specifying the upper-left corner of the rectangle. The src-drawable must have the same root and the same depth as dst-drawable (or a *Match* error results).

If regions of the source rectangle are obscured and have not been retained in backing store or if regions outside the boundaries of the source drawable are specified, then those regions are not copied, but the following occurs on all corresponding destination regions that are either visible or are retained in backing-store. If the dst-drawable is a window with a background other than *None*, these corresponding destination regions are tiled (with plane-mask of all ones and function *Copy*) with that background. Regardless of tiling and whether the destination is a window or a pixmap, if graphics-exposures in gc is *True*, then *GraphicsExposure* events for all corresponding destination regions are generated.

If graphics-exposures is *True* but no *GraphicsExposure* events are generated, then a *NoExposure* event is generated.

GC components: function, plane-mask, subwindow-mode, graphics-exposures, clip-x-origin, clip-y-origin, clip-mask.

CopyColormapAndFree

```
mid, src-cmap: COLORMAP
Errors: Alloc, Colormap, IDChoice
```

This request creates a colormap of the same visual type and for the same screen as src-cmap, and it associates identifier mid with it. It also moves all of the client's existing allocations from src-cmap to the new colormap with their color values intact and their read-only or writable characteristics intact, and it frees those entries in src-cmap. Color values in other entries in the new colormap are undefined. If src-cmap was created by the client with alloc *All* (see

CreateColormap request), then the new colormap is also created with alloc All, all color values for all entries are copied from src-cmap, and then all entries in src-cmap are freed. If src-cmap was not created by the client with alloc All, then the allocations to be moved are all those pixels and planes that have been allocated by the client using either AllocColor, AllocNamedColor, AllocColorCells or AllocColorPlanes and that have not been freed since they were allocated.

CopyGC

```
src-gc, dst-gc: GCONTEXT
value-mask: BITMASK
Errors: Alloc, GContext, Match, Value
```

This request copies components from src-gc to dst-gc. The value-mask specifies which components to copy, as for *CreateGC*. The two gcontexts must have the same root and the same depth (or a *Match* error results).

CopyPlane

```
src-drawable, dst-drawable: DRAWABLE
gc: GCONTEXT
src-x, src-y: INT16
width, height: CARD16
dst-x, dst-y: INT16
bit-plane: CARD32
Errors: Drawable, GContext, Match, Value
```

The src-drawable must have the same root as dst-drawable (or a *Match* error results), but it need not have the same depth.

The bit-plane must have exactly one bit set to 1 and the value of bit-plane must be less than 2^n where n is the depth of src-drawable (or a *Value* error results).

Effectively, a pixmap of the same depth as dst-drawable and with size specified by the source region is formed using the foreground/background pixels in gc (foreground everywhere the bit-plane in src-drawable contains a bit set to 1, background everywhere the bit-plane contains a bit set to 0), and the equivalent of a *CopyArea* is performed, with all the same exposure semantics. This can also be thought of as using the specified region of the source bit-plane as a stipple with a fill-style of *OpaqueStippled* for filling a rectangular area of the destination.

GC components: function, plane-mask, foreground, background, subwindow-mode, graphics-exposures, clip-x-origin, clip-y-origin, clip-mask.

CreateColormap

```
mid: COLORMAP
visual: VISUALID
window: WINDOW
alloc: {None, All}
Errors: Alloc, IDChoice, Match, Value, Window
```

This request creates a colormap of the specified visual type for the screen on which the window resides and associates the identifier mid with it. The visual type must be one supported by the screen (or a *Match* error results). The initial values of the colormap entries are undefined for classes *GrayScale*, *PseudoColor* and *DirectColor*. For *StaticGray*, *StaticColor* and *TrueColor*, the

entries will have defined values, but those values are specific to the visual and are not defined by the core protocol. For *StaticGray*, *StaticColor* and *TrueColor*, alloc must be specified as *None* (or a *Match* error results). For the other classes, if alloc is *None*, the colormap initially has no allocated entries, and clients can allocate entries.

If alloc is All, then the entire colormap is "allocated" writable. The initial values of all allocated entries are undefined. For GrayScale and PseudoColor, the effect is as if an AllocColorCells request returned all pixel values from zero to N-1, where N is the colormap-entries value in the specified visual. For DirectColor, the effect is as if an AllocColorPlanes request returned a pixel value of zero and red-mask, green-mask and blue-mask values containing the same bits as the corresponding masks in the specified visual. However, in all cases, none of these entries can be freed with FreeColors.

CreateCursor

```
cid: CURSOR
source: PIXMAP
mask: PIXMAP or None
fore-red, fore-green, fore-blue: CARD16
back-red, back-green, back-blue: CARD16
x, y: CARD16
Errors: Alloc, IDChoice, Match, Pixmap
```

This request creates a cursor and associates identifier cid with it. The foreground and background RGB values must be specified, even if the server only has a *StaticGray* or *GrayScale* screen. The foreground is used for the bits set to 1 in the source, and the background is used for the bits set to 0. Both source and mask (if specified) must have depth one (or a *Match* error results), but they can have any root. The mask pixmap defines the shape of the cursor. That is, the bits set to 1 in the mask define which source pixels will be displayed, and where the mask has bits set to 0, the corresponding bits of the source pixmap are ignored. If no mask is given, all pixels of the source are displayed. The mask, if present, must be the same size as the source (or a *Match* error results). The x and y coordinates define the hotspot relative to the source's origin and must be a point within the source (or a *Match* error results).

The components of the cursor may be transformed arbitrarily to meet display limitations.

The pixmaps can be freed immediately if no further explicit references to them are to be made.

Subsequent drawing in the source or mask pixmap has an undefined effect on the cursor. The server might or might not make a copy of the pixmap.

CreateGC

```
cid: GCONTEXT
drawable: DRAWABLE
value-mask: BITMASK
value-list: LISTOFVALUE

Errors: Alloc, Drawable, Font, IDChoice,
Match, Pixmap, Value
```

This request creates a graphics context and assigns the identifier cid to it. The gcontext can be used with any destination drawable having the same root and depth as the specified drawable; use with other drawables results in a *Match* error.

The value-mask and value-list specify which components are to be explicitly initialized. The context components are:

Component	Туре
function	{Clear,
	And,
	AndReverse,
	Copy,
	AndInverted,
	NoOp,
	Xor,
	Or,
	Nor,
	Equiv,
	Invert,
	OrReverse,
	CopyInverted,
	OrInverted,
	Nand,
	Set}
plane-mask	CARD32
foreground	CARD32
background	CARD32
line-width	CARD16
line-style	{Solid, OnOffDash, DoubleDash}
cap-style	{NotLast, Butt, Round, Projecting}
join-style	{Miter, Round, Bevel}
fill-style	{Solid, Tiled, OpaqueStippled, Stippled}
fill-rule	{EvenOdd, Winding}
arc-mode	{Chord, PieSlice}
tile	PIXMAP
stipple	PIXMAP
tile-stipple-x-origin	INT16
tile-stipple-y-origin	INT16
font	FONT
subwindow-mode	{ClipByChildren, IncludeInferiors}
graphics-exposures	BOOL
clip-x-origin	INT16
clip-y-origin	INT16
clip-mask	PIXMAP or None
dash-offset	CARD16
dashes	CARD8

In graphics operations, given a source and destination pixel, the result is computed bitwise on corresponding bits of the pixels; that is, a Boolean operation is performed in each bit plane. The plane-mask restricts the operation to a subset of planes, so the result is:

```
((src FUNC dst) AND plane-mask) OR (dst AND (NOT plane-mask))
```

Range checking is not performed on the values for foreground, background or plane-mask. They are simply truncated to the appropriate number of bits.

The meanings of the functions are:	The	meanings	of	the	functions	are:
------------------------------------	-----	----------	----	-----	-----------	------

Function	Operation
Clear	0
And	src AND dst
AndReverse	src AND (NOT dst)
Copy	src
AndInverted	(NOT src) AND dst
NoOp	dst
Xor	src XOR dst
Or	src OR dst
Nor	(NOT src) AND (NOT dst)
Equiv	(NOT src) XOR dst
Invert	NOT dst
OrReverse	src OR (NOT dst)
CopyInverted	NOT src
OrInverted	(NOT src) OR dst
Nand	(NOT src) OR (NOT dst)
Set	1

The line-width is measured in pixels and can be greater than or equal to one, a wide line, or the special value zero, a thin line.

Wide lines are drawn centered on the path described by the graphics request. Unless otherwise specified by the join or cap style, the bounding box of a wide line with endpoints [x1, y1], [x2, y2] and width w is a rectangle with vertices at the following real coordinates:

$$[x1-w^*sn/2), y1+(w^*cs/2)], [x1+(w^*sn/2), y1-w^*cs/2)], [x2-w^*sn/2), y2+(w^*cs/2)], [x2+(w^*sn/2), y2-w^*cs/2)]$$

The sn is the sine of the angle of the line and cs is the cosine of the angle of the line. A pixel is part of the line (and hence drawn) if the center of the pixel is fully inside the bounding box, which is viewed as having infinitely thin edges. If the center of the pixel is exactly on the bounding box, it is part of the line if and only if the interior is immediately to its right (x increasing direction). Pixels with centers on a horizontal edge are a special case and are part of the line if and only if the interior or the boundary is immediately below (y increasing direction) and if the interior or the boundary is immediately to the right (x increasing direction). Note that this description is a mathematical model describing the pixels that are drawn for a wide line and does not imply that trigonometry is required to implement such a model. Real or fixed point arithmetic is recommended for computing the corners of the line endpoints for lines greater than one pixel in width.

Thin lines (zero line-width) are "one pixel wide" lines drawn using an unspecified, device-dependent algorithm. There are only two constraints on this algorithm. First, if a line is drawn unclipped from [x1,y1] to [x2,y2] and another line is drawn unclipped from [x1+dx,y1+dy] to [x2+dx,y2+dy], then a point [x,y] is touched by drawing the first line if and only if the point [x+dx,y+dy] is touched by drawing the second line. Second, the effective set of points comprising a line cannot be affected by clipping. Thus, a point is touched in a clipped line if and only if the point lies inside the clipping region and the point would be touched by the line when drawn unclipped.

Note that a wide line drawn from [x1,y1] to [x2,y2] always draws the same pixels as a wide line drawn from [x2,y2] to [x1,y1], not counting cap-style and join-style. Implementors are encouraged to make this property true for thin lines, but it is not required. A line-width of zero may differ from a line-width of one in which pixels are drawn. In general, drawing a thin line

will be faster than drawing a wide line of width one, but thin lines may not mix well aesthetically with wide lines because of the different drawing algorithms. If it is desirable to obtain precise and uniform results across all displays, a client should always use a line-width of one, rather than a line-width of zero.

The line-style defines which sections of a line are drawn:

Solid The full path of the line is drawn.

DoubleDash The full path of the line is drawn, but the even dashes are filled differently

than the odd dashes (see fill-style), with Butt cap-style used where even and

odd dashes meet.

OnOffDash Only the even dashes are drawn, and cap-style applies to all internal ends of

the individual dashes (except NotLast is treated as Butt).

The cap-style defines how the endpoints of a path are drawn:

NotLast The result is equivalent to Butt, except that for a line-width of zero the final

endpoint is not drawn.

Butt The result is square at the endpoint (perpendicular to the slope of the line)

with no projection beyond.

Round The result is a circular arc with its diameter equal to the line-width, centered

on the endpoint; it is equivalent to Butt for line-width zero.

Projecting The result is square at the end, but the path continues beyond the endpoint for

a distance equal to half the line-width; it is equivalent to Butt for line-width

zero.

The join-style defines how corners are drawn for wide lines:

Miter The outer edges of the two lines extend to meet at an angle. However, if the

angle is less than 11 degrees, a Bevel join-style is used instead.

Round The result is a circular arc with a diameter equal to the line-width, centered on

the joinpoint.

Bevel The result is Butt endpoint styles, and then the triangular "notch" is filled.

For a line with coincident endpoints (x1=x2, y1=y2), when the cap-style is applied to both endpoints, the semantics depends on the line-width and the cap-style:

NotLast thin This is device-dependent, but the desired effect is that nothing is

drawn.

Butt thin This is device-dependent, but the desired effect is that a single

pixel is drawn.

Round thin This is the same as Butt /thin. Projecting thin This is the same as Butt /thin.

Butt wide Nothing is drawn.

Round wide The closed path is a circle, centered at the endpoint and with a

diameter equal to the line-width.

Projecting wide The closed path is a square, aligned with the coordinate axes,

centered at the endpoint and with sides equal to the line-width.

For a line with coincident endpoints (x1=x2, y1=y2), when the join-style is applied at one or both endpoints, the effect is as if the line was removed from the overall path. However, if the total

path consists of (or is reduced to) a single point joined with itself, the effect is the same as when the cap-style is applied at both endpoints.

The tile/stipple represents an infinite 2D plane, with the tile/stipple replicated in all dimensions. When that plane is superimposed on the drawable for use in a graphics operation, the upper left corner of some instance of the tile/stipple is at the coordinates within the drawable specified by the tile/stipple origin. The tile/stipple and clip origins are interpreted relative to the origin of whatever destination drawable is specified in a graphics request.

The tile pixmap must have the same root and depth as the gcontext (or a *Match* error results). The stipple pixmap must have depth one and must have the same root as the gcontext (or a *Match* error results). For fill-style *Stippled* (but not fill-style *OpaqueStippled*), the stipple pattern is tiled in a single plane and acts as an additional clip mask to be ANDed with the clip-mask. Any size pixmap can be used for tiling or stippling, although some sizes may be faster to use than others.

The fill-style defines the contents of the source for line, text, and fill requests. For all text and fill requests (for example, *PolyText8*, *PolyText16*, *PolyFillRectangle*, *FillPoly* and *PolyFillArc*) as well as for line requests with line-style *Solid*, (for example, *PolyLine*, *PolySegment*, *PolyRectangle*, *PolyArc*) and for the even dashes for line requests with line-style *OnOffDash* or *DoubleDash*:

Solid Foreground.

Tiled Tile.

OpaqueStippled A tile with the same width and height as stipple but with background

everywhere stipple has a zero and with foreground everywhere stipple has a

one.

Stippled Foreground masked by stipple.

For the odd dashes for line requests with line-style DoubleDash:

Solid Background.

Tiled Same as for even dashes.

OpaqueStippled Same as for even dashes.

Stippled Background masked by stipple.

The dashes value allowed here is actually a simplified form of the more general patterns that can be set with *SetDashes*. Specifying a value of N here is equivalent to specifying the two element list [N, N] in *SetDashes*. The value must be non-zero (or a *Value* error results). The meaning of dash-offset and dashes are explained in the *SetDashes* request.

The clip-mask restricts writes to the destination drawable. Only pixels where the clip-mask has bits set to 1 are drawn. Pixels are not drawn outside the area covered by the clip-mask or where the clip-mask has bits set to 0. The clip-mask affects all graphics requests, but it does not clip sources. The clip-mask origin is interpreted relative to the origin of whatever destination drawable is specified in a graphics request. If a pixmap is specified as the clip-mask, it must have depth 1 and have the same root as the gcontext (or a *Match* error results). If clip-mask is *None*, then pixels are always drawn, regardless of the clip origin. The clip-mask can also be set with the *SetClipRectangles* request.

For *ClipByChildren*, both source and destination windows are additionally clipped by all viewable *InputOutput* children. For *IncludeInferiors*, neither source nor destination window is clipped by inferiors. This will result in including subwindow contents in the source and drawing through subwindow boundaries of the destination. The use of *IncludeInferiors* with a source or destination window of one depth with mapped inferiors of differing depth is not

illegal, but the semantics is undefined by the core protocol.

The fill-rule defines what pixels are inside (that is, are drawn) for paths given in *FillPoly* requests. *EvenOdd* means a point is inside if an infinite ray with the point as origin crosses the path an odd number of times. For *Winding*, a point is inside if an infinite ray with the point as origin crosses an unequal number of clockwise and counterclockwise directed path segments. A clockwise directed path segment is one that crosses the ray from left to right as observed from the point. A counter-clockwise segment is one that crosses the ray from right to left as observed from the point. The case where a directed line segment is coincident with the ray is uninteresting because one can simply choose a different ray that is not coincident with a segment.

For both fill rules, a point is infinitely small and the path is an infinitely thin line. A pixel is inside if the center point of the pixel is inside and the center point is not on the boundary. If the center point is on the boundary, the pixel is inside if and only if the polygon interior is immediately to its right (x increasing direction). Pixels with centers along a horizontal edge are a special case and are inside if and only if the polygon interior is immediately below (y increasing direction).

The arc-mode controls filling in the *PolyFillArc* request.

The graphics-exposures flag controls *GraphicsExposure* event generation for *CopyArea* and *CopyPlane* requests (and any similar requests defined by extensions).

The default component values are:

Component	Default
function	Сору
plane-mask	all ones
foreground	0
background	1
line-width	0
line-style	Solid
cap-style	Butt
join-style	Miter
fill-style	Solid
fill-rule	EvenOdd
arc-mode	PieSlice
tile	Pixmap of unspecified size filled with foreground pixel (that is,
	client specified pixel if any, else 0) (subsequent changes to
	foreground do not affect this pixmap)
stipple	Pixmap of unspecified size filled with ones
tile-stipple-x-origin	0
tile-stipple-y-origin	0
font	<server-dependent-font></server-dependent-font>
subwindow-mode	ClipByChildren
graphics-exposures	True
clip-x-origin	0
clip-y-origin	0
clip-mask	None
dash-offset	0
dashes	4 (that is, the list [4, 4])

Storing a pixmap in a gcontext might or might not result in a copy being made. If the pixmap is later used as the destination for a graphics request, the change might or might not be reflected in the gcontext. If the pixmap is used simultaneously in a graphics request as both a destination

and as a tile or stipple, the results are not defined.

It is quite likely that some amount of gcontext information will be cached in display hardware and that such hardware can only cache a small number of gcontexts. Given the number and complexity of components, clients should view switching between gcontexts with nearly identical state as significantly more expensive than making minor changes to a single gcontext.

CreateGlyphCursor

```
cid: CURSOR
source-font: FONT
mask-font: FONT or None
source-char, mask-char: CARD16
fore-red, fore-green, fore-blue: CARD16
back-red, back-green, back-blue: CARD16
Errors: Alloc, Font, IDChoice, Value
```

This request is similar to *CreateCursor*, except the source and mask bitmaps are obtained from the specified font glyphs. The source-char must be a defined glyph in source-font, and if mask-font is given, mask-char must be a defined glyph in mask-font (or a *Value* error results). The mask font and character are optional. The origins of the source and mask (if it is defined) glyphs are positioned coincidently and define the hotspot. The source and mask need not have the same bounding box metrics, and there is no restriction on the placement of the hotspot relative to the bounding boxes. If no mask is given, all pixels of the source are displayed. Note that source-char and mask-char are CARD16, not CHAR2B. For 2-byte matrix fonts, the 16-bit value should be formed with byte1 in the most-significant byte and byte2 in the least-significant byte.

The components of the cursor may be transformed arbitrarily to meet display limitations.

The fonts can be freed immediately if no further explicit references to them are to be made.

CreatePixmap

```
pid: PIXMAP
drawable: DRAWABLE
depth: CARD8
width, height: CARD16
Errors: Alloc, Drawable, IDChoice, Value
```

This request creates a pixmap and assigns the identifier pid to it. The width and height must be non-zero (or a *Value* error results). The depth must be one of the depths supported by the root of the specified drawable (or a *Value* error results). The initial contents of the pixmap are undefined.

It is legal to pass an *InputOnly* window as a drawable to this request.

CreateWindow

```
wid, parent: WINDOW
class: {InputOutput, InputOnly, CopyFromParent}
depth: CARD8
visual: VISUALID or CopyFromParent
x, y: INT16
width, height, border-width: CARD16
value-mask: BITMASK
value-list: LISTofVALUE
Errors: Alloc, Colormap, Cursor, IDChoice, Match,
Pixmap, Value, Window
```

This request creates an unmapped window and assigns the identifier wid to it.

A class of *CopyFromParent* means the class is taken from the parent. A depth of zero for class *InputOutput* or *CopyFromParent* means the depth is taken from the parent. A visual of *CopyFromParent* means the visual type is taken from the parent. For class *InputOutput*, the visual type and depth must be a combination supported for the screen (or a *Match* error results). The depth need not be the same as the parent, but the parent must not be of class *InputOnly* (or a *Match* error results). For class *InputOnly*, the depth must be zero (or a *Match* error results), and the visual must be one supported for the screen (or a *Match* error results). However, the parent can have any depth and class.

The server essentially acts as if *InputOnly* windows do not exist for the purposes of graphics requests, exposure processing, and *VisibilityNotify* events. An *InputOnly* window cannot be used as a drawable (as a source or destination for graphics requests). *InputOnly* and *InputOutput* windows act identically in other respects—properties, grabs, input control, and so on.

The coordinate system has the X axis horizontal and the Y axis vertical, with the origin [0, 0] at the upper left. Coordinates are integral, in terms of pixels, and coincide with pixel centers. Each window and pixmap has its own coordinate system. For a window, the origin is inside the border at the inside upper left.

The x and y coordinates for the window are relative to the parent's origin and specify the position of the upper-left outer corner of the window (not the origin). The width and height specify the inside size (not including the border) and must be non-zero (or a *Value* error results). The border-width for an *InputOnly* window must be zero (or a *Match* error results).

The window is placed on top in the stacking order with respect to siblings.

The value-mask and value-list specify attributes of the window that are to be explicitly initialized. The possible values are:

Attribute	Туре
background-pixmap	PIXMAP or None or ParentRelative
background-pixel	CARD32
border-pixmap	PIXMAP or CopyFromParent
border-pixel	CARD32
bit-gravity	BITGRAVITY
win-gravity	WINGRAVITY
backing-store	{NotUseful, WhenMapped, Always}
backing-planes	CARD32
backing-pixel	CARD32
save-under	BOOL
event-mask	SETofEVENT
do-not-propagate-mask	SETofDEVICEEVENT
override-redirect	BOOL
colormap	COLORMAP or CopyFromParent
cursor	CURSOR or None

The default values when attributes are not explicitly initialized are:

Attribute	Default
background-pixmap	None
border-pixmap	CopyFromParent
bit-gravity	Forget
win-gravity	NorthWest
backing-store	NotUseful
backing-planes	all ones
backing-pixel	zero
save-under	False
event-mask	{} (empty set)
do-not-propagate-mask	{} (empty set)
override-redirect	False
colormap	CopyFromParent
cursor	None

Only the following attributes are defined for *InputOnly* windows:

- win-gravity
- event-mask
- · do-not-propagate-mask
- override-redirect
- cursor.

It is a *Match* error to specify any other attributes for *InputOnly* windows.

If background-pixmap is given, it overrides the default background-pixmap. The background pixmap and the window must have the same root and the same depth (or a *Match* error results). Any size pixmap can be used, although some sizes may be faster than others. If background *None* is specified, the window has no defined background. If background *ParentRelative* is specified, the parent's background is used, but the window must have the same depth as the parent (or a *Match* error results). If the parent has background *None*, then the window will also have background *None*. A copy of the parent's background is not made. The parent's background is reexamined each time the window background is required. If background-pixel

is given, it overrides the default background-pixmap and any background-pixmap given explicitly, and a pixmap of undefined size filled with background-pixel is used for the background. Range checking is not performed on the background-pixel value; it is simply truncated to the appropriate number of bits. For a *ParentRelative* background, the background tile origin always aligns with the parent's background tile origin. Otherwise, the background tile origin is always the window origin.

When no valid contents are available for regions of a window and the regions are either visible or the server is maintaining backing store, the server automatically tiles the regions with the window's background unless the window has a background of *None*. If the background is *None*, the previous screen contents from other windows of the same depth as the window are simply left in place if the contents come from the parent of the window or an inferior of the parent; otherwise, the initial contents of the exposed regions are undefined. Exposure events are then generated for the regions, even if the background is *None*.

The border tile origin is always the same as the background tile origin. If border-pixmap is given, it overrides the default border-pixmap. The border pixmap and the window must have the same root and the same depth (or a *Match* error results). Any size pixmap can be used, although some sizes may be faster than others. If *CopyFromParent* is given, the parent's border pixmap is copied (subsequent changes to the parent's border attribute do not affect the child), but the window must have the same depth as the parent (or a *Match* error results). The pixmap might be copied by sharing the same pixmap object between the child and parent or by making a complete copy of the pixmap contents. If border-pixel is given, it overrides the default border-pixmap and any border-pixmap given explicitly, and a pixmap of undefined size filled with border-pixel is used for the border. Range checking is not performed on the border-pixel value; it is simply truncated to the appropriate number of bits.

Output to a window is always clipped to the inside of the window, so that the border is never affected.

The bit-gravity defines which region of the window should be retained if the window is resized, and win-gravity defines how the window should be repositioned if the parent is resized (see *ConfigureWindow* request).

A backing-store of *WhenMapped* advises the server that maintaining contents of obscured regions when the window is mapped would be beneficial. A backing-store of *Always* advises the server that maintaining contents even when the window is unmapped would be beneficial. In this case, the server may generate an exposure event when the window is created. A value of *NotUseful* advises the server that maintaining contents is unnecessary, although a server may still choose to maintain contents while the window is mapped. Note that if the server maintains contents, then the server should maintain complete contents not just the region within the parent boundaries, even if the window is larger than its parent. While the server maintains contents, exposure events will not normally be generated, but the server may stop maintaining contents at any time.

If save-under is *True*, the server is advised that when this window is mapped, saving the contents of windows it obscures would be beneficial.

When the contents of obscured regions of a window are being maintained, regions obscured by noninferior windows are included in the destination (and source, when the window is the source) of graphics requests, but regions obscured by inferior windows are not included.

The backing-planes indicates (with bits set to 1) which bit planes of the window hold dynamic data that must be preserved in backing-stores and during save-unders. The backing-pixel specifies what value to use in planes not covered by backing-planes. The server is free to save only the specified bit planes in the backing-store or save-under and regenerate the remaining

planes with the specified pixel value. Any bits beyond the specified depth of the window in these values are simply ignored.

The event-mask defines which events the client is interested in for this window (or for some event types, inferiors of the window). The do-not-propagate-mask defines which events should not be propagated to ancestor windows when no client has the event type selected in this window.

The override-redirect specifies whether map and configure requests on this window should override a *SubstructureRedirect* on the parent, typically to inform a window manager not to tamper with the window.

The colormap specifies the colormap that best reflects the true colors of the window. Servers capable of supporting multiple hardware colormaps may use this information, and window managers may use it for <code>InstallColormap</code> requests. The colormap must have the same visual type and root as the window (or a <code>Match</code> error results). If <code>CopyFromParent</code> is specified, the parent's colormap is copied (subsequent changes to the parent's colormap attribute do not affect the child). However, the window must have the same visual type as the parent (or a <code>Match</code> error results), and the parent must not have a colormap of <code>None</code> (or a <code>Match</code> error results). For an explanation of <code>None</code>, see <code>FreeColormap</code> request. The colormap is copied by sharing the colormap object between the child and the parent, not by making a complete copy of the colormap contents.

If a cursor is specified, it will be used whenever the pointer is in the window. If *None* is specified, the parent's cursor will be used when the pointer is in the window, and any change in the parent's cursor will cause an immediate change in the displayed cursor.

This request generates a *CreateNotify* event.

The background and border pixmaps and the cursor may be freed immediately if no further explicit references to them are to be made.

Subsequent drawing into the background or border pixmap has an undefined effect on the window state. The server might or might not make a copy of the pixmap.

DeleteProperty

window: WINDOW property: ATOM

Errors: Atom, Window

This request deletes the property from the specified window if the property exists and generates a *PropertyNotify* event on the window unless the property does not exist.

DestroySubwindows

window: WINDOW
Errors: Window

This request performs a *DestroyWindow* request on all children of the window, in bottom-to-top stacking order.

DestroyWindow

window: WINDOW
Errors: Window

If the argument window is mapped, an *UnmapWindow* request is performed automatically. The window and all inferiors are then destroyed, and a *DestroyNotify* event is generated for each window. The ordering of the *DestroyNotify* events is such that for any given window, *DestroyNotify* is generated on all inferiors of the window before being generated on the window itself. The ordering among siblings and across subhierarchies is not otherwise constrained.

Normal exposure processing on formerly obscured windows is performed.

If the window is a root window, this request has no effect.

FillPoly

```
drawable: DRAWABLE
gc: GCONTEXT
shape: {Complex, Nonconvex, Convex}
coordinate-mode: {Origin, Previous}
points: LISTofPOINT

Errors: Drawable, GContext, Match, Value
```

This request fills the region closed by the specified path. The path is closed automatically if the last point in the list does not coincide with the first point. No pixel of the region is drawn more than once.

The first point is always relative to the drawable's origin. The rest are relative either to that origin or the previous point, depending on the coordinate-mode.

The shape parameter may be used by the server to improve performance. *Complex* means the path may self-intersect. Contiguous coincident points in the path are not treated as self-intersection.

Nonconvex means the path does not self-intersect, but the shape is not wholly convex. If known by the client, specifying *Nonconvex* over *Complex* may improve performance. If *Nonconvex* is specified for a self-intersecting path, the graphics results are undefined.

Convex means that for every pair of points inside the polygon, the line segment connecting them does not intersect the path. If known by the client, specifying *Convex* can improve performance. If *Convex* is specified for a path that is not convex, the graphics results are undefined.

GC components: function, plane-mask, fill-style, fill-rule, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

GC mode-dependent components: foreground, background, tile, stipple, tile-stipple-x-origin, tile-stipple-y-origin.

ForceScreenSaver

```
mode: {Activate, Reset}
Errors: Value
```

If the mode is *Activate* and screen-saver is currently deactivated, then screen-saver is activated (even if screen-saver has been disabled with a timeout value of zero). If the mode is *Reset* and screen-saver is currently enabled, then screen-saver is deactivated (if it was activated), and the activation timer is reset to its initial state as if device input had just been received.

FreeColormap

```
cmap: COLORMAP
Errors: Colormap
```

This request deletes the association between the resource ID and the colormap and frees the colormap storage. If the colormap is an installed map for a screen, it is uninstalled (see *UninstallColormap* request). If the colormap is defined as the colormap for a window (by means of *CreateWindow* or *ChangeWindowAttributes*), the colormap for the window is changed to *None*, and a *ColormapNotify* event is generated. The protocol does not define the colors displayed for a window with a colormap of *None*.

This request has no effect on a default colormap for a screen.

FreeColors

cmap: COLORMAP
pixels: LISTofCARD32
plane-mask: CARD32
Errors: Access, Colormap, Value

The plane-mask should not have any bits in common with any of the pixels. The set of all pixels is produced by ORing together subsets of plane-mask with the pixels. The request frees all of these pixels that were allocated by the client (using <code>AllocColor</code>, <code>AllocNamedColor</code>, <code>AllocColorCells</code> and <code>AllocColorPlanes</code>). Note that freeing an individual pixel obtained from <code>AllocColorPlanes</code> may not actually allow it to be reused until all of its related pixels are also freed. Similarly, a read-only entry is not actually freed until it has been freed by all clients, and if a client allocates the same read-only entry multiple times, it must free the entry that many times before the entry is actually freed.

All specified pixels that are allocated by the client in cmap are freed, even if one or more pixels produce an error. A *Value* error is generated if a specified pixel is not a valid index into cmap. An *Access* error is generated if a specified pixel is not allocated by the client (that is, is unallocated or is only allocated by another client) or if the colormap was created with all entries writable (using an alloc value of *All* in *CreateColormap*). If more than one pixel is in error, it is arbitrary as to which pixel is reported.

FreeCursor

```
cursor: CURSOR
Errors: Cursor
```

This request deletes the association between the resource ID and the cursor. The cursor storage will be freed when no other resource references it.

FreeGC

```
gc: GCONTEXT
Errors: GContext
```

This request deletes the association between the resource ID and the gcontext and destroys the gcontext.

FreePixmap

```
pixmap: PIXMAP
Errors: Pixmap
```

This request deletes the association between the resource ID and the pixmap. The pixmap storage will be freed when no other resource references it.

GetAtomName

```
atom: ATOM
=>
name: STRING8
Errors: Atom
```

This request returns the name for the given atom.

GetFontPath

=>

```
path: LISTofSTRING8
```

This request returns the current search path for fonts.

GetGeometry

```
drawable: DRAWABLE

=>

root: WINDOW
depth: CARD8
x, y: INT16
width, height, border-width: CARD16

Errors: Drawable
```

This request returns the root and current geometry of the drawable. The depth is the number of bits per pixel for the object. The x, y and border-width will always be zero for pixmaps. For a window, the x and y coordinates specify the upper-left outer corner of the window relative to its parent's origin, and the width and height specify the inside size, not including the border.

It is legal to pass an *InputOnly* window as a drawable to this request.

GetImage

```
drawable: DRAWABLE
x, y: INT16
width, height: CARD16
plane-mask: CARD32
format: {XYPixmap, ZPixmap}
=>
depth: CARD8
visual: VISUALID or None
data: LISTofBYTE
Errors: Drawable, Match, Value
```

This request returns the contents of the given rectangle of the drawable in the given format. The x and y coordinates are relative to the drawable's origin and define the upper-left corner of the rectangle. If *XYPixmap* is specified, only the bit planes specified in plane-mask are transmitted, with the planes appearing from most-significant to least-significant in bit order. If *ZPixmap* is specified, then bits in all planes not specified in plane-mask are transmitted as zero. Range checking is not performed on plane-mask; extraneous bits are simply ignored. The returned depth is as specified when the drawable was created and is the same as a depth component in a FORMAT structure (in the connection setup), not a bits-per-pixel component. If the drawable is a window, its visual type is returned. If the drawable is a pixmap, the visual is *None*.

If the drawable is a pixmap, then the given rectangle must be wholly contained within the pixmap (or a *Match* error results). If the drawable is a window, the window must be viewable, and it must be the case that, if there were no inferiors or overlapping windows, the specified rectangle of the window would be fully visible on the screen and wholly contained within the outside edges of the window (or a *Match* error results). Note that the borders of the window can be included and read with this request. If the window has a backing store, then the backing-store contents are returned for regions of the window that are obscured by noninferior windows; otherwise, the returned contents of such obscured regions are undefined. Also undefined are the returned contents of visible regions of inferiors of different depth than the specified window.

The pointer cursor image is not included in the contents returned.

This request is not general-purpose in the same sense as other graphics-related requests. It is intended specifically for rudimentary hardcopy support.

GetInputFocus

```
focus: WINDOW or PointerRoot or None
revert-to: {Parent, PointerRoot, None}
```

This request returns the current focus state.

GetKeyboardControl

=>

key-click-percent: CARD8
bell-percent: CARD8
bell-pitch: CARD16
bell-duration: CARD16
led-mask: CARD32
global-auto-repeat: {On, Off}
auto-repeats: LISTofCARD8

This request returns the current control values for the keyboard. For the LEDs, the least-significant bit of led-mask corresponds to LED one, and each one bit in led-mask indicates an LED that is lit. The auto-repeats is a bit vector; each one bit indicates that auto-repeat is enabled for the corresponding key. The vector is represented as 32 bytes. Byte N (from 0) contains the bits for keys 8N to 8N + 7, with the least-significant bit in the byte representing key 8N.

GetKeyboardMapping

```
first-keycode: KEYCODE
count: CARD8
=>
keysyms-per-keycode: CARD8
keysyms: LISTofKEYSYM
Errors: Value
```

This request returns the symbols for the specified number of keycodes, starting with the specified keycode. The first-keycode must be greater than or equal to min-keycode as returned in the connection setup (or a *Value* error results), and:

```
first-keycode + count - 1
```

must be less than or equal to max-keycode as returned in the connection setup (or a *Value* error results). The number of elements in the keysyms list is:

```
count * keysyms-per-keycode
```

and KEYSYM number N (counting from zero) for keycode K has an index (counting from zero) of:

```
(K - first-keycode) * keysyms-per-keycode + N
```

in keysyms. The keysyms-per-keycode value is chosen arbitrarily by the server to be large enough to report all requested symbols. A special KEYSYM value of *NoSymbol* is used to fill in unused elements for individual keycodes.

GetModifierMapping

=>

keycodes-per-modifier: CARD8 keycodes: LISTofKEYCODE

This request returns the keycodes of the keys being used as modifiers. The number of keycodes in the list is 8*keycodes-per-modifier. The keycodes are divided into eight sets, with each set containing keycodes-per-modifier elements. The sets are assigned to the modifiers *Shift*, *Lock*, *Control*, *Mod1*, *Mod2*, *Mod3*, *Mod4* and *Mod5*, in order. The keycodes-per-modifier value is chosen arbitrarily by the server; zeroes are used to fill in unused elements within each set. If only zero values are given in a set, the use of the corresponding modifier has been disabled. The order of keycodes within each set is chosen arbitrarily by the server.

GetMotionEvents

This request returns all events in the motion history buffer that fall between the specified start and stop times (inclusive) and that have coordinates that lie within (including borders) the specified window at its present placement. The x and y coordinates are reported relative to the origin of the window.

If the start time is later than the stop time or if the start time is in the future, no events are returned. If the stop time is in the future, it is equivalent to specifying *CurrentTime*.

GetPointerControl

```
acceleration-numerator, acceleration-denominator: CARD16
threshold: CARD16
```

This request returns the current acceleration and threshold for the pointer.

GetPointerMapping

```
=>
map: LISTofCARD8
```

This request returns the current mapping of the pointer. Elements of the list are indexed starting from one. The length of the list indicates the number of physical buttons.

The nominal mapping for a pointer is the identity mapping: map[i]=i.

GetProperty

```
window: WINDOW
property: ATOM
type: ATOM or AnyPropertyType
long-offset, long-length: CARD32
delete: BOOL
=>
type: ATOM or None
format: {0, 8, 16, 32}
bytes-after: CARD32
value: LISTofINT8 or LISTofINT16 or LISTofINT32
Errors: Atom, Value, Window
```

If the specified property does not exist for the specified window, then the return type is *None*, the format and bytes-after are zero, and the value is empty. The delete argument is ignored in this case. If the specified property exists but its type does not match the specified type, then the return type is the actual type of the property, the format is the actual format of the property (never zero), the bytes-after is the length of the property in bytes (even if the format is 16 or 32), and the value is empty. The delete argument is ignored in this case. If the specified property exists and either *AnyPropertyType* is specified or the specified type matches the actual type of the property, then the return type is the actual type of the property, the format is the actual format of the property (never zero), and the bytes-after and value are as follows, given:

```
N = actual length of the stored property in bytes
    (even if the format is 16 or 32)
I = 4 * long-offset
T = N - I
L = MINIMUM(T, 4 * long-length)
A = N - (I + L)
```

The returned value starts at byte index I in the property (indexing from 0), and its length in bytes is L. However, it is a *Value* error if long-offset is given such that L is negative. The value of bytes-after is A, giving the number of trailing unread bytes in the stored property. If delete is *True* and the bytes-after is zero, the property is also deleted from the window, and a *PropertyNotify* event is generated on the window.

GetScreenSaver

=>

```
timeout, interval: CARD16 prefer-blanking: {Yes, No} allow-exposures: {Yes, No}
```

This request returns the current screen-saver control values.

GetSelectionOwner

```
selection: ATOM
=>
owner: WINDOW or None
Errors: Atom
```

This request returns the current owner window of the specified selection, if any. If *None* is returned, then there is no owner for the selection.

GetWindowAttributes

```
window: WINDOW
=>
visual: VISUALID
class: {InputOutput, InputOnly}
bit-gravity: BITGRAVITY
win-gravity: WINGRAVITY
backing-store: {NotUseful, WhenMapped, Always}
backing-planes: CARD32
backing-pixel: CARD32
save-under: BOOL
colormap: COLORMAP or None
map-is-installed: BOOL
map-state: {Unmapped, Unviewable, Viewable}
all-event-masks, your-event-mask: SETofEVENT
do-not-propagate-mask: SETofDEVICEEVENT
override-redirect: BOOL
Errors: Window
```

This request returns the current attributes of the window. A window is *Unviewable* if it is mapped but some ancestor is unmapped. All-event-masks is the inclusive-OR of all event masks selected on the window by clients. Your-event-mask is the event mask selected by the querying client.

GrabButton

```
modifiers: SETOfKEYMASK or AnyModifier
button: BUTTON or AnyButton
grab-window: WINDOW
owner-events: BOOL
event-mask: SETOfPOINTEREVENT
pointer-mode, keyboard-mode: {Synchronous, Asynchronous}
confine-to: WINDOW or None
cursor: CURSOR or None
Errors: Access, Cursor, Value, Window
```

This request establishes a passive grab. In the future, the pointer is actively grabbed as described in *GrabPointer*, the last-pointer-grab time is set to the time at which the button was pressed (as transmitted in the *ButtonPress* event), and the *ButtonPress* event is reported if all of the following conditions are true:

- The pointer is not grabbed and the specified button is logically pressed when the specified modifier keys are logically down, and no other buttons or modifier keys are logically down.
- The grab-window contains the pointer.
- The confine-to window (if any) is viewable.
- A passive grab on the same button/key combination does not exist on any ancestor of grabwindow.

The interpretation of the remaining arguments is the same as for *GrabPointer*. The active grab is terminated automatically when the logical state of the pointer has all buttons released, independent of the logical state of modifier keys. Note that the logical state of a device (as seen by means of the protocol) may lag the physical state if device event processing is frozen.

This request overrides all previous passive grabs by the same client on the same button/key combinations on the same window. A modifier of *AnyModifier* is equivalent to issuing the request for all possible modifier combinations (including the combination of no modifiers). It is not required that all specified modifiers have currently assigned keycodes. A button of *AnyButton* is equivalent to issuing the request for all possible buttons. Otherwise, it is not required that the button specified currently be assigned to a physical button.

An *Access* error is generated if some other client has already issued a *GrabButton* request with the same button/key combination on the same window. When using *AnyModifier* or *AnyButton*, the request fails completely (no grabs are established), and an *Access* error is generated if there is a conflicting grab for any combination. The request has no effect on an active grab.

GrabKey

```
key: KEYCODE or AnyKey
modifiers: SETofKEYMASK or AnyModifier
grab-window: WINDOW
owner-events: BOOL
pointer-mode, keyboard-mode: {Synchronous, Asynchronous}
Errors: Access, Value, Window
```

This request establishes a passive grab on the keyboard. In the future, the keyboard is actively grabbed as described in *GrabKeyboard*, the last-keyboard-grab time is set to the time at which the key was pressed (as transmitted in the *KeyPress* event), and the *KeyPress* event is reported if all of

the following conditions are true:

- The keyboard is not grabbed and the specified key (which can itself be a modifier key) is logically pressed when the specified modifier keys are logically down, and no other modifier keys are logically down.
- Either the grab-window is an ancestor of (or is) the focus window, or the grab-window is a descendent of the focus window and contains the pointer.
- A passive grab on the same key combination does not exist on any ancestor of grab-window.

The interpretation of the remaining arguments is the same as for *GrabKeyboard*. The active grab is terminated automatically when the logical state of the keyboard has the specified key released, independent of the logical state of modifier keys. Note that the logical state of a device (as seen by means of the protocol) may lag the physical state if device event processing is frozen.

This request overrides all previous passive grabs by the same client on the same key combinations on the same window. A modifier of *AnyModifier* is equivalent to issuing the request for all possible modifier combinations (including the combination of no modifiers). It is not required that all modifiers specified have currently assigned keycodes. A key of *AnyKey* is equivalent to issuing the request for all possible keycodes. Otherwise, the key must be in the range specified by min-keycode and max-keycode in the connection setup (or a *Value* error results).

An *Access* error is generated if some other client has issued a *GrabKey* with the same key combination on the same window. When using *AnyModifier* or *AnyKey*, the request fails completely (no grabs are established), and an *Access* error is generated if there is a conflicting grab for any combination.

GrabKeyboard

This request actively grabs control of the keyboard. Further key events are reported only to the grabbing client. This request overrides any active keyboard grab by this client.

If owner-events is *False*, all generated key events are reported with respect to grab-window. If owner-events is *True* and if a generated key event would normally be reported to this client, it is reported normally. Otherwise, the event is reported with respect to the grab-window. Both *KeyPress* and *KeyRelease* events are always reported, independent of any event selection made by the client.

If keyboard-mode is *Asynchronous*, keyboard event processing continues normally. If the keyboard is currently frozen by this client, then processing of keyboard events is resumed. If keyboard-mode is *Synchronous*, the state of the keyboard (as seen by means of the protocol) appears to freeze. No further keyboard events are generated by the server until the grabbing client issues a releasing *AllowEvents* request or until the keyboard grab is released. Actual

keyboard changes are not lost while the keyboard is frozen. They are simply queued for later processing.

If pointer-mode is *Asynchronous*, pointer event processing is unaffected by activation of the grab. If pointer-mode is *Synchronous*, the state of the pointer (as seen by means of the protocol) appears to freeze. No further pointer events are generated by the server until the grabbing client issues a releasing *AllowEvents* request or until the keyboard grab is released. Actual pointer changes are not lost while the pointer is frozen. They are simply queued for later processing.

This request generates FocusIn and FocusOut events.

The request fails with status *AlreadyGrabbed* if the keyboard is actively grabbed by some other client. The request fails with status *Frozen* if the keyboard is frozen by an active grab of another client. The request fails with status *NotViewable* if grab-window is not viewable. The request fails with status *InvalidTime* if the specified time is earlier than the last-keyboard-grab time or later than the current server time. Otherwise, the last-keyboard-grab time is set to the specified time with *CurrentTime* replaced by the current server time.

GrabPointer

This request actively grabs control of the pointer. Further pointer events are only reported to the grabbing client. The request overrides any active pointer grab by this client.

If owner-events is *False*, all generated pointer events are reported with respect to grab-window and are only reported if selected by event-mask. If owner-events is *True* and a generated pointer event would normally be reported to this client, it is reported normally. Otherwise, the event is reported with respect to the grab-window and is only reported if selected by event-mask. For either value of owner-events, unreported events are simply discarded.

If pointer-mode is *Asynchronous*, pointer event processing continues normally. If the pointer is currently frozen by this client, then processing of pointer events is resumed. If pointer-mode is *Synchronous*, the state of the pointer (as seen by means of the protocol) appears to freeze, and no further pointer events are generated by the server until the grabbing client issues a releasing *AllowEvents* request or until the pointer grab is released. Actual pointer changes are not lost while the pointer is frozen. They are simply queued for later processing.

If keyboard-mode is *Asynchronous*, keyboard event processing is unaffected by activation of the grab. If keyboard-mode is *Synchronous*, the state of the keyboard (as seen by means of the protocol) appears to freeze, and no further keyboard events are generated by the server until the grabbing client issues a releasing *AllowEvents* request or until the pointer grab is released. Actual keyboard changes are not lost while the keyboard is frozen. They are simply queued for

later processing.

If a cursor is specified, then it is displayed regardless of what window the pointer is in. If no cursor is specified, then when the pointer is in grab-window or one of its subwindows, the normal cursor for that window is displayed. Otherwise, the cursor for grab-window is displayed.

If a confine-to window is specified, then the pointer will be restricted to stay contained in that window. The confine-to window need have no relationship to the grab-window. If the pointer is not initially in the confine-to window, then it is warped automatically to the closest edge (and enter/leave events are generated normally) just before the grab activates. If the confine-to window is subsequently reconfigured, the pointer will be warped automatically as necessary to keep it contained in the window.

This request generates *EnterNotify* and *LeaveNotify* events.

The request fails with status *AlreadyGrabbed* if the pointer is actively grabbed by some other client. The request fails with status *Frozen* if the pointer is frozen by an active grab of another client. The request fails with status *NotViewable* if grab-window or confine-to window is not viewable or if the confine-to window lies completely outside the boundaries of the root window. The request fails with status *InvalidTime* if the specified time is earlier than the last-pointer-grab time or later than the current server time. Otherwise, the last-pointer-grab time is set to the specified time, with *CurrentTime* replaced by the current server time.

GrabServer

This request disables processing of requests and close-downs on all connections other than the one this request arrived on.

ImageText8

```
drawable: DRAWABLE
gc: GCONTEXT
x, y: INT16
string: STRING8
Errors: Drawable, GContext, Match
```

The x and y coordinates are relative to the drawable's origin and specify the baseline starting position (the initial character origin). The effect is first to fill a destination rectangle with the background pixel defined in gc and then to paint the text with the foreground pixel. The upper-left corner of the filled rectangle is at:

```
[x, y - font-ascent]
the width is:
   overall-width
and the height is:
   font-ascent + font-descent
```

The overall-width, font-ascent and font-descent are as they would be returned by a *QueryTextExtents* call using gc and string.

The function and fill-style defined in gc are ignored for this request. The effective function is *Copy*, and the effective fill-style *Solid*.

For fonts defined with 2-byte matrix indexing, each STRING8 byte is interpreted as a byte2 value of a CHAR2B with a byte1 value of zero.

GC components: plane-mask, foreground, background, font, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

ImageText16

```
drawable: DRAWABLE
gc: GCONTEXT
x, y: INT16
string: STRING16
Errors: Drawable, GContext, Match
```

This request is similar to *ImageText8*, except 2-byte (or 16-bit) characters are used. For fonts defined with linear indexing rather than 2-byte matrix indexing, the server will interpret each CHAR2B as a 16-bit number that has been transmitted most-significant byte first (that is, byte1 of the CHAR2B is taken as the most-significant byte).

InstallColormap

```
cmap: COLORMAP
Errors: Colormap
```

This request makes this colormap an installed map for its screen. All windows associated with this colormap immediately display with true colors. As a side effect, additional colormaps might be implicitly installed or uninstalled by the server. Which other colormaps get installed or uninstalled is server-dependent except that the required list must remain installed.

If cmap is not already an installed map, a *ColormapNotify* event is generated on every window having cmap as an attribute. In addition, for every other colormap that is installed or uninstalled as a result of the request, a *ColormapNotify* event is generated on every window having that colormap as an attribute.

At any time, there is a subset of the installed maps that are viewed as an ordered list and are called the required list. The length of the required list is at most M, where M is the mininstalled-maps specified for the screen in the connection setup. The required list is maintained as follows. When a colormap is an explicit argument to <code>InstallColormap</code>, it is added to the head of the list; the list is truncated at the tail, if necessary, to keep the length of the list to at most M. When a colormap is an explicit argument to <code>UninstallColormap</code> and it is in the required list, it is removed from the list. A colormap is not added to the required list when it is installed implicitly by the server, and the server cannot implicitly uninstall a colormap that is in the required list.

Initially the default colormap for a screen is installed (but is not in the required list).

InternAtom

```
name: STRING8
only-if-exists: BOOL
=>
atom: ATOM or None
Errors: Alloc, Value
```

This request returns the atom for the given name. If only-if-exists is *False*, then the atom is created if it does not exist. The string should use the ISO Latin-1 encoding. Upper case and lower case matter.

The lifetime of an atom is not tied to the interning client. Atoms remain defined until server reset (see Section 3.4).

KillClient

```
resource: CARD32 or AllTemporary
Errors: Value
```

If a valid resource is specified, *KillClient* forces a close-down of the client that created the resource. If the client has already terminated in either *RetainPermanent* or *RetainTemporary* mode, all of the client's resources are destroyed (see Section 3.4). If *AllTemporary* is specified, then the resources of all clients that have terminated in *RetainTemporary* are destroyed.

ListExtensions

```
names: LISTofSTRING8
```

This request returns a list of all extensions supported by the server.

ListFonts

```
pattern: STRING8
max-names: CARD16
=>
names: LISTofSTRING8
```

This request returns a list of available font names (as controlled by the font search path; see *SetFontPath* request) that match the pattern. At most, max-names names will be returned. The pattern should use the ISO Latin-1 encoding, and upper case and lower case do not matter. In the pattern, the "?" character (octal value 77) will match any single character, and the "*" character (octal value 52) will match any number of characters. The returned names are in lower case.

ListFontsWithInfo

```
pattern: STRING8
max-names: CARD16

=>+

name: STRING8
info: FONTINFO
replies-hint: CARD32

where:
FONTINFO: <same type definition as in QueryFont>
```

This request is similar to *ListFonts*, but it also returns information about each font. The information returned for each font is identical to what *QueryFont* would return except that the per-character metrics are not returned. Note that this request can generate multiple replies. With each reply, replies-hint may provide an indication of how many more fonts will be returned. This number is a hint only and may be larger or smaller than the number of fonts actually returned. A zero value does not guarantee that no more fonts will be returned. After the font replies, a reply with a zero-length name is sent to indicate the end of the reply sequence.

ListHosts

```
=>
mode: {Enabled, Disabled}
hosts: LISTofHOST
```

This request returns the hosts on the access control list and whether use of the list at connection setup is currently enabled or disabled.

Each HOST is padded to a multiple of four bytes.

ListInstalledColormaps

```
window: WINDOW
=>
cmaps: LISTofCOLORMAP
Errors: Window
```

This request returns a list of the currently installed colormaps for the screen of the specified window. The order of colormaps is not significant, and there is no explicit indication of the required list (see *InstallColormap* request).

ListProperties

```
window: WINDOW
=>
atoms: LISTofATOM
Errors: Window
```

This request returns the atoms of properties currently defined on the window.

LookupColor

```
cmap: COLORMAP
name: STRING8

=>

exact-red, exact-green, exact-blue: CARD16
visual-red, visual-green, visual-blue: CARD16
Errors: Colormap, Name
```

This request looks up the string name of a color with respect to the screen associated with cmap and returns both the exact color values and the closest values provided by the hardware with respect to the visual type of cmap. The name should use the ISO Latin-1 encoding, and upper case and lower case do not matter.

MapWindow

```
window: WINDOW
Errors: Window
```

If the window is already mapped, this request has no effect.

If the override-redirect attribute of the window is *False* and some other client has selected *SubstructureRedirect* on the parent, then a *MapRequest* event is generated, but the window remains unmapped. Otherwise, the window is mapped, and a *MapNotify* event is generated.

If the window is now viewable and its contents have been discarded, the window is tiled with its background (if no background is defined, the existing screen contents are not altered), and zero or more exposure events are generated. If a backing-store has been maintained while the window was unmapped, no exposure events are generated. If a backing-store will now be maintained, a full-window exposure is always generated. Otherwise, only visible regions may be reported. Similar tiling and exposure take place for any newly viewable inferiors.

MapSubwindows

window: WINDOW
Errors: Window

This request performs a *MapWindow* request on all unmapped children of the window, in top-to-bottom stacking order.

NoOperation

This request has no arguments and no results, but the request length field can be non-zero, which allows the request to be any multiple of four bytes in length. The bytes contained in the request are uninterpreted by the server.

This request can be used in its minimum four byte form as padding where necessary by client libraries that find it convenient to force requests to begin on 64-bit boundaries.

OpenFont

fid: FONT
name: STRING8
Errors: Alloc, IDChoice, Name

This request loads the specified font, if necessary, and associates identifier fid with it. The font name should use the ISO Latin-1 encoding, and upper case and lower case do not matter. The interpretation of characters "?" (octal value 77) and "*" (octal value 52) in the name is not defined by the core protocol, but is reserved for future definition. A structured format for font names is specified in the **XLFD** specification.

Fonts are not associated with a particular screen and can be stored as a component of any graphics context.

PolyArc

drawable: DRAWABLE
gc: GCONTEXT
arcs: LISTofARC
Errors: Drawable, GContext, Match

This request draws circular or elliptical arcs. Each arc is specified by a rectangle and two angles. The angles are signed integers in degrees scaled by 64, with positive indicating counterclockwise motion and negative indicating clockwise motion. The start of the arc is specified by angle1 relative to the three-o'clock position from the center of the rectangle, and the path and extent of the arc is specified by angle2 relative to the start of the arc. If the magnitude of angle2 is greater than 360 degrees, it is truncated to 360 degrees. The x and y coordinates of the rectangle are relative to the origin of the drawable. For an arc specified as [x,y,w,h,a1,a2], the origin of the major and minor axes is at [x+(w/2),y+(h/2)], and the infinitely thin path describing the entire circle/ellipse intersects the horizontal axis at [x,y+(h/2)] and [x+w,y+(h/2)] and intersects the vertical axis at [x+(w/2),y] and [x+(w/2),y+h]. These coordinates can be fractional; that is, they are not truncated to discrete coordinates. The path should be defined by the ideal mathematical path. For a wide line with line-width lw, the bounding outlines for filling are given by the two infinitely thin paths consisting of all points whose perpendicular distance from the path of the circle/ellipse is equal to 1w/2 (which may be a fractional value). The cap-style and join-style are applied the same as for a line corresponding to the tangent of the circle/ellipse at the endpoint.

For an arc specified as [x,y,w,h,a1,a2], the angles must be specified in the effectively skewed coordinate system of the ellipse (for a circle, the angles and coordinate systems are identical). The relationship between these angles and angles expressed in the normal coordinate system of the screen (as measured with a protractor) is as follows:

```
skewed-angle = atan(tan(normal-angle) * w/h) + adjust
```

The skewed-angle and normal-angle are expressed in radians (rather than in degrees scaled by 64) in the range [0,2*PI). The atan returns a value in the range [-PI/2,PI/2]. The adjust is:

```
0 for normal-angle in the range [0,PI/2)
PI for normal-angle in the range [PI/2,(3*PI)/2)
2*PI for normal-angle in the range [(3*PI)/2,2*PI)
```

The arcs are drawn in the order listed. If the last point in one arc coincides with the first point in the following arc, the two arcs will join correctly. If the first point in the first arc coincides with the last point in the last arc, the two arcs will join correctly. For any given arc, no pixel is drawn more than once. If two arcs join correctly and the line-width is greater than zero and the arcs intersect, no pixel is drawn more than once. Otherwise, the intersecting pixels of intersecting arcs are drawn multiple times. Specifying an arc with one endpoint and a clockwise extent draws the same pixels as specifying the other endpoint and an equivalent counterclockwise extent, except as it affects joins.

By specifying one axis to be zero, a horizontal or vertical line can be drawn.

Angles are computed based solely on the coordinate system, ignoring the aspect ratio.

GC components: function, plane-mask, line-width, line-style, cap-style, join-style, fill-style, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

GC mode-dependent components: foreground, background, tile, stipple, tile-stipple-x-origin, tile-stipple-y-origin, dash-offset, dashes.

PolyFillArc

```
drawable: DRAWABLE
gc: GCONTEXT
arcs: LISTofARC
Errors: Drawable, GContext, Match
```

For each arc, this request fills the region closed by the infinitely thin path described by the specified arc and one or two line segments, depending on the arc-mode. For *Chord*, the single line segment joining the endpoints of the arc is used. For *PieSlice*, the two line segments joining the endpoints of the arc with the center point are used. The arcs are as specified in the *PolyArc* request.

The arcs are filled in the order listed. For any given arc, no pixel is drawn more than once. If regions intersect, the intersecting pixels are drawn multiple times.

GC components: function, plane-mask, fill-style, arc-mode, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

GC mode-dependent components: foreground, background, tile, stipple, tile-stipple-x-origin, tile-stipple-y-origin.

PolyFillRectangle

```
drawable: DRAWABLE
gc: GCONTEXT
rectangles: LISTofRECTANGLE
Errors: Drawable, GContext, Match
```

This request fills the specified rectangles, as if a four-point *FillPoly* were specified for each rectangle:

```
[x,y] [x+width,y] [x+width,y+height] [x,y+height]
```

The x and y coordinates of each rectangle are relative to the drawable's origin and define the upper-left corner of the rectangle.

The rectangles are drawn in the order listed. For any given rectangle, no pixel is drawn more than once. If rectangles intersect, the intersecting pixels are drawn multiple times.

GC components: function, plane-mask, fill-style, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

GC mode-dependent components: foreground, background, tile, stipple, tile-stipple-x-origin, tile-stipple-y-origin.

PolyLine

```
drawable: DRAWABLE
gc: GCONTEXT
coordinate-mode: {Origin, Previous}
points: LISTofPOINT
Errors: Drawable, GContext, Match, Value
```

This request draws lines between each pair of points (point[i], point[i+1]). The lines are drawn in the order listed. The lines join correctly at all intermediate points, and if the first and last points coincide, the first and last lines also join correctly.

For any given line, no pixel is drawn more than once. If thin (zero line-width) lines intersect, the intersecting pixels are drawn multiple times. If wide lines intersect, the intersecting pixels are drawn only once, as though the entire *PolyLine* were a single filled shape.

The first point is always relative to the drawable's origin. The rest are relative either to that origin or the previous point, depending on the coordinate-mode.

GC components: function, plane-mask, line-width, line-style, cap-style, join-style, fill-style, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

GC mode-dependent components: foreground, background, tile, stipple, tile-stipple-x-origin, tile-stipple-y-origin, dash-offset, dashes.

PolyPoint

```
drawable: DRAWABLE
gc: GCONTEXT
coordinate-mode: {Origin, Previous}
points: LISTofPOINT

Errors: Drawable, GContext, Match, Value
```

This request combines the foreground pixel in gc with the pixel at each point in the drawable. The points are drawn in the order listed.

The first point is always relative to the drawable's origin. The rest are relative either to that origin or the previous point, depending on the coordinate-mode.

GC components: function, plane-mask, foreground, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

PolyRectangle

```
drawable: DRAWABLE
gc: GCONTEXT
rectangles: LISTofRECTANGLE
Errors: Drawable, GContext, Match
```

This request draws the outlines of the specified rectangles, as if a five-point *PolyLine* were specified for each rectangle:

```
[x,y] [x+width,y] [x+width,y+height] [x,y+height] [x,y]
```

The x and y coordinates of each rectangle are relative to the drawable's origin and define the upper-left corner of the rectangle.

The rectangles are drawn in the order listed. For any given rectangle, no pixel is drawn more than once. If rectangles intersect, the intersecting pixels are drawn multiple times.

GC components: function, plane-mask, line-width, line-style, cap-style, join-style, fill-style, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

GC mode-dependent components: foreground, background, tile, stipple, tile-stipple-x-origin, tile-stipple-y-origin, dash-offset, dashes.

PolySegment

```
drawable: DRAWABLE
gc: GCONTEXT
segments: LISTofSEGMENT
where:
SEGMENT: [x1, y1, x2, y2: INT16]
Errors: Drawable, GContext, Match
```

For each segment, this request draws a line between [x1, y1] and [x2, y2]. The lines are drawn in the order listed. No joining is performed at coincident endpoints. For any given line, no pixel is drawn more than once. If lines intersect, the intersecting pixels are drawn multiple times.

GC components: function, plane-mask, line-width, line-style, cap-style, fill-style, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

GC mode-dependent components: foreground, background, tile, stipple, tile-stipple-x-origin, tile-stipple-y-origin, dash-offset, dashes.

PolyText8

The x and y coordinates are relative to the drawable's origin and specify the baseline starting position (the initial character origin). Each text item is processed in turn. A font item causes the font to be stored in gc and to be used for subsequent text. Switching among fonts does not affect the next character origin. A text element delta specifies an additional change in the position along the x axis before the string is drawn; the delta is always added to the character origin. Each character image, as defined by the font in gc, is treated as an additional mask for a fill operation on the drawable.

All contained FONTs are always transmitted most-significant byte first.

If a Font error is generated for an item, the previous items may have been drawn.

For fonts defined with 2-byte matrix indexing, each STRING8 byte is interpreted as a byte2 value of a CHAR2B with a byte1 value of zero.

GC components: function, plane-mask, fill-style, font, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

GC mode-dependent components: foreground, background, tile, stipple, tile-stipple-x-origin, tile-stipple-y-origin.

PolyText16

This request is similar to *PolyText8*, except 2-byte (or 16-bit) characters are used. For fonts defined with linear indexing rather than 2-byte matrix indexing, the server will interpret each

CHAR2B as a 16-bit number that has been transmitted most-significant byte first (that is, byte1 of the CHAR2B is taken as the most-significant byte).

PutImage

```
drawable: DRAWABLE
gc: GCONTEXT
depth: CARD8
width, height: CARD16
dst-x, dst-y: INT16
left-pad: CARD8
format: {Bitmap, XYPixmap, ZPixmap }
data: LISTofBYTE
Errors: Drawable, GContext, Match, Value
```

This request combines an image with a rectangle of the drawable. The dst-x and dst-y coordinates are relative to the drawable's origin.

If *Bitmap* format is used, then depth must be one (or a *Match* error results), and the image must be in XY format. The foreground pixel in gc defines the source for bits set to 1 in the image, and the background pixel defines the source for the bits set to 0.

For *XYPixmap* and *ZPixmap*, the depth must match the depth of the drawable (or a *Match* error results). For *XYPixmap*, the image must be sent in XY format. For *ZPixmap*, the image must be sent in the Z format defined for the given depth.

The left-pad must be zero for *ZPixmap* format (or a *Match* error results). For *Bitmap* and *XYPixmap* format, left-pad must be less than bitmap-scanline-pad as given in the server connection setup information (or a *Match* error results). The first left-pad bits in every scanline are to be ignored by the server. The actual image begins that many bits into the data. The width argument defines the width of the actual image and does not include left-pad.

GC components: function, plane-mask, subwindow-mode, clip-x-origin, clip-y-origin, clip-mask.

GC mode-dependent components: foreground, background.

QueryBestSize

```
class: {Cursor, Tile, Stipple}
drawable: DRAWABLE
width, height: CARD16

=>
width, height: CARD16

Errors: Drawable, Match, Value
```

This request returns the best size that is closest to the argument size. For *Cursor*, this is the largest size that can be fully displayed. For *Tile*, this is the size that can be tiled fastest. For *Stipple*, this is the size that can be stippled fastest.

For *Cursor*, the drawable indicates the desired screen. For *Tile* and *Stipple*, the drawable indicates the screen and also possibly the window class and depth. An *InputOnly* window cannot be used as the drawable for *Tile* or *Stipple* (or a *Match* error results).

QueryColors

```
cmap: COLORMAP
pixels: LISTofCARD32

=>
colors: LISTofRGB
where:
RGB: [red, green, blue: CARD16]
Errors: Colormap, Value
```

This request returns the hardware-specific color values stored in cmap for the specified pixels. The values returned for an unallocated entry are undefined. A *Value* error is generated if a pixel is not a valid index into cmap. If more than one pixel is in error, it is arbitrary as to which pixel is reported.

QueryExtension

```
name: STRING8

=>
present: BOOL
major-opcode: CARD8
first-event: CARD8
first-error: CARD8
```

This request determines if the named extension is present. If so, the major opcode for the extension is returned, if it has one. Otherwise, zero is returned. Any minor opcode and the request formats are specific to the extension. If the extension involves additional event types, the base event type code is returned. Otherwise, zero is returned. The format of the events is specific to the extension. If the extension involves additional error codes, the base error code is returned. Otherwise, zero is returned. The format of additional data in the errors is specific to the extension.

The extension name should use the ISO Latin-1 encoding, and upper case and lower case matter.

QueryFont

```
font: FONTABLE
=>
font-info: FONTINFO
char-infos: LISTofCHARINFO
where:
FONTINFO: [draw-direction: {LeftToRight, RightToLeft}]
           min-char-or-byte2, max-char-or-byte2: CARD16
           min-byte1, max-byte1: CARD8
           all-chars-exist: BOOL
           default-char: CARD16
           min-bounds: CHARINFO
           max-bounds: CHARINFO
           font-ascent: INT16
           font-descent: INT16
          properties: LISTofFONTPROP]
FONTPROP: [name: ATOM
           value: <32-bit-value>1
CHARINFO: [left-side-bearing: INT16
           right-side-bearing: INT16
           character-width: INT16
           ascent: INT16
           descent: INT16
           attributes: CARD161
Errors: Font
```

This request returns logical information about a font. If a geontext is given for font, the currently contained font is used.

The draw-direction is just a hint and indicates whether most char-infos have a positive, *LeftToRight*, or a negative, *RightToLeft*, character-width metric. The core protocol defines no support for vertical text.

If min-byte1 and max-byte1 are both zero, then min-char-or-byte2 specifies the linear character index corresponding to the first element of char-infos, and max-char-or-byte2 specifies the linear character index of the last element. If either min-byte1 or max-byte1 are non-zero, then both min-char-or-byte2 and max-char-or-byte2 will be less than 256, and the 2-byte character index values corresponding to char-infos element N (counting from 0) are:

```
byte1 = N/D + min-byte1
byte2 = N\D + min-char-or-byte2
where:

D = max-char-or-byte2 - min-char-or-byte2 + 1
/ = integer division
\\ = integer modulus
```

If char-infos has length zero, then min-bounds and max-bounds will be identical, and the effective char-infos is one filled with this char-info, of length:

```
L = D * (max-byte1 - min-byte1 + 1)
```

That is, all glyphs in the specified linear or matrix range have the same information, as given by min-bounds (and max-bounds). If all-chars-exist is *True*, then all characters in char-infos have non-zero bounding boxes.

The default-char specifies the character that will be used when an undefined or non-existent character is used. Note that default-char is a CARD16, not CHAR2B. For a font using 2-byte matrix format, the default-char has byte1 in the most-significant byte and byte2 in the least-significant byte. If the default-char itself specifies an undefined or non-existent character, then no printing is performed for an undefined or non-existent character.

The min-bounds and max-bounds contain the minimum and maximum values of each individual CHARINFO component over all char-infos (ignoring non-existent characters). The bounding box of the font (that is, the smallest rectangle enclosing the shape obtained by superimposing all characters at the same origin [x,y]) has its upper-left coordinate at:

```
[x + min-bounds.left-side-bearing, y - max-bounds.ascent]
with a width of:
   max-bounds.right-side-bearing - min-bounds.left-side-bearing
and a height of:
   max-bounds.ascent + max-bounds.descent
```

The font-ascent is the logical extent of the font above the baseline and is used for determining line spacing. Specific characters may extend beyond this. The font-descent is the logical extent of the font at or below the baseline and is used for determining line spacing. Specific characters may extend beyond this. If the baseline is at Y-coordinate y, then the logical extent of the font is inclusive between the Y-coordinate values (y - font-ascent) and (y + font-descent - 1).

A font is not guaranteed to have any properties. The interpretation of the property value (for example, INT32, CARD32) must be derived from *a priori* knowledge of the property. A basic set of font properties is specified in the **XLFD** specification.

For a character origin at [x,y], the bounding box of a character (that is, the smallest rectangle enclosing the character's shape), described in terms of CHARINFO components, is a rectangle with its upper-left corner at:

```
[x + left-side-bearing, y - ascent]
with a width of:
    right-side-bearing - left-side-bearing
and a height of:
    ascent + descent
and the origin for the next character is defined to be:
    [x + character-width, y]
```

Note that the baseline is logically viewed as being just below nondescending characters (when descent is zero, only pixels with Y-coordinates less than y are drawn) and that the origin is logically viewed as being coincident with the left edge of a nonkerned character (when left-side-bearing is zero, no pixels with X-coordinate less than x are drawn).

Note that CHARINFO metric values can be negative.

A non-existent character is represented with all CHARINFO components zero.

The interpretation of the per-character attributes field is server-dependent.

QueryKeymap

=> keys: LISTofCARD8

This request returns a bit vector for the logical state of the keyboard. Each bit set to 1 indicates that the corresponding key is currently pressed. The vector is represented as 32 bytes. Byte N (from 0) contains the bits for keys 8N + 7 with the least-significant bit in the byte representing key 8N. Note that the logical state of a device (as seen by means of the protocol) may lag the physical state if device event processing is frozen.

QueryPointer

window: WINDOW

=>

root: WINDOW
child: WINDOW or None
same-screen: BOOL
root-x, root-y, win-x, win-y: INT16
mask: SETofKEYBUTMASK

Errors: Window

The root window the pointer is logically on and the pointer coordinates relative to the root's origin are returned. If same-screen is *False*, then the pointer is not on the same screen as the argument window, child is *None*, and win-x and win-y are zero. If same-screen is *True*, then win-x and win-y are the pointer coordinates relative to the argument window's origin, and child is the child containing the pointer, if any. The current logical state of the modifier keys and the buttons are also returned. Note that the logical state of a device (as seen by means of the protocol) may lag the physical state if device event processing is frozen.

QueryTextExtents

```
font: FONTABLE
string: STRING16

=>

draw-direction: {LeftToRight, RightToLeft}
font-ascent: INT16
font-descent: INT16
overall-ascent: INT16
overall-descent: INT16
overall-width: INT32
overall-left: INT32
everall-right: INT32
Errors: Font
```

This request returns the logical extents of the specified string of characters in the specified font. If a gcontext is given for font, the currently contained font is used. The draw-direction, font-ascent and font-descent are the same as described in *QueryFont*. The overall-ascent is the maximum of the ascent metrics of all characters in the string, and the overall-descent is the maximum of the descent metrics. The overall-width is the sum of the character-width metrics of all characters in the string. For each character in the string, let W be the sum of the character-width metrics of all characters preceding it in the string, let L be the left-side-bearing metric of the character plus W, and let R be the right-side-bearing metric of the character plus W. The overall-left is the minimum L of all characters in the string, and the overall-right is the maximum R.

For fonts defined with linear indexing rather than 2-byte matrix indexing, the server will interpret each CHAR2B as a 16-bit number that has been transmitted most-significant byte first (that is, byte1 of the CHAR2B is taken as the most-significant byte).

Characters with all zero metrics are ignored. If the font has no defined default-char, then undefined characters in the string are also ignored.

QueryTree

```
window: WINDOW

=>

root: WINDOW
parent: WINDOW or None
children: LISTofWINDOW

Errors: Window
```

This request returns the root, the parent, and the children of the window. The children are listed in bottom-to-top stacking order.

RecolorCursor

```
cursor: CURSOR
fore-red, fore-green, fore-blue: CARD16
back-red, back-green, back-blue: CARD16
Errors: Cursor
```

This request changes the color of a cursor. If the cursor is being displayed on a screen, the change is visible immediately.

ReparentWindow

```
window, parent: WINDOW
x, y: INT16
Errors: Match, Window
```

If the window is mapped, an *UnmapWindow* request is performed automatically first. The window is then removed from its current position in the hierarchy and is inserted as a child of the specified parent. The x and y coordinates are relative to the parent's origin and specify the new position of the upper-left outer corner of the window. The window is placed on top in the stacking order with respect to siblings. A *ReparentNotify* event is then generated. The override-redirect attribute of the window is passed on in this event; a value of *True* indicates that a window manager should not tamper with this window. Finally, if the window was originally mapped, a *MapWindow* request is performed automatically.

Normal exposure processing on formerly obscured windows is performed. The server might not generate exposure events for regions from the initial unmap that are immediately obscured by the final map.

A *Match* error is generated if:

- The new parent is not on the same screen as the old parent.
- The new parent is the window itself or an inferior of the window.
- The new parent is *InputOnly* and the window is not.
- The window has a *ParentRelative* background, and the new parent is not the same depth as the window.

RotateProperties

```
window: WINDOW
delta: INT16
properties: LISTofATOM
Errors: Atom, Match, Window
```

If the property names in the list are viewed as being numbered starting from zero, and there are N property names in the list, then the value associated with property name I becomes the value associated with property name (I + delta) mod N, for all I from zero to N-1. The effect is to rotate the states by delta places around the virtual ring of property names (right for positive delta, left for negative delta).

If delta mod N is non-zero, a *PropertyNotify* event is generated for each property in the order listed.

If an atom occurs more than once in the list or no property with that name is defined for the window, a *Match* error is generated. If an *Atom* or *Match* error is generated, no properties are changed.

SendEvent

```
destination: WINDOW or PointerWindow or InputFocus
propagate: BOOL
event-mask: SETofEVENT
event: <normal-event-format>

Errors: Value, Window
```

If *PointerWindow* is specified, destination is replaced with the window that the pointer is in. If *InputFocus* is specified and the focus window contains the pointer, destination is replaced with the window that the pointer is in. Otherwise, destination is replaced with the focus window.

If the event-mask is the empty set, then the event is sent to the client that created the destination window. If that client no longer exists, no event is sent.

If propagate is *False*, then the event is sent to every client selecting on destination any of the event types in event-mask.

If propagate is *True* and no clients have selected on destination any of the event types in event-mask, then destination is replaced with the closest ancestor of destination for which some client has selected a type in event-mask and no intervening window has that type in its do-not-propagate-mask. If no such window exists or if the window is an ancestor of the focus window and *InputFocus* was originally specified as the destination, then the event is not sent to any clients. Otherwise, the event is reported to every client selecting on the final destination any of the types specified in event-mask.

The event code must be one of the core events or one of the events defined by an extension (or a *Value* error results) so that the server can correctly byte-swap the contents as necessary. The contents of the event are otherwise unaltered and unchecked by the server except to force on the most-significant bit of the event code and to set the sequence number in the event correctly.

Active grabs are ignored for this request.

SetAccessControl

```
mode: {Enable, Disable}
Errors: Access, Value
```

This request enables or disables the use of the access control list at connection setups.

The client must reside on the same host as the server and/or have been granted permission by a server-dependent method to execute this request (or an *Access* error results).

SetClipRectangles

```
gc: GCONTEXT
clip-x-origin, clip-y-origin: INT16
rectangles: LISTofRECTANGLE
ordering: {UnSorted, YSorted, YXSorted, YXBanded}
Errors: Alloc, GContext, Match, Value
```

This request changes clip-mask in gc to the specified list of rectangles and sets the clip origin. Output will be clipped to remain contained within the rectangles. The clip origin is interpreted relative to the origin of whatever destination drawable is specified in a graphics request. The rectangle coordinates are interpreted relative to the clip origin. The rectangles should be nonintersecting, or graphics results will be undefined. Note that the list of rectangles can be empty, which effectively disables output. This is the opposite of passing *None* as the clip-mask in *CreateGC* and *ChangeGC*.

If known by the client, ordering relations on the rectangles can be specified with the ordering argument. This may provide faster operation by the server. If an incorrect ordering is specified, the server may generate a *Match* error, but it is not required to do so. If no error is generated, the graphics results are undefined. *UnSorted* means that the rectangles are in arbitrary order. *YSorted* means that the rectangles are nondecreasing in their Y origin. *YXSorted* additionally constrains *YSorted* order in that all rectangles with an equal Y origin are nondecreasing in their X origin. *YXBanded* additionally constrains *YXSorted* by requiring that, for every possible Y scanline, all rectangles that include that scanline have identical Y origins and Y extents.

SetCloseDownMode

```
mode: {Destroy, RetainPermanent, RetainTemporary}
Errors: Value
```

This request defines what will happen to the client's resources at connection close. A connection starts in *Destroy* mode. The meaning of the close-down mode is described in Section 3.4.

SetDashes

```
gc: GCONTEXT
dash-offset: CARD16
dashes: LISTofCARD8
Errors: Alloc, GContext, Value
```

This request sets dash-offset and dashes in gc for dashed line styles. Dashes cannot be empty (or a *Value* error results). Specifying an odd-length list is equivalent to specifying the same list concatenated with itself to produce an even-length list. The initial and alternating elements of dashes are the even dashes; the others are the odd dashes. Each element specifies a dash length in pixels. All of the elements must be non-zero (or a *Value* error results). The dash-offset defines the phase of the pattern, specifying how many pixels into dashes the pattern should actually begin in any single graphics request. Dashing is continuous through path elements combined with a join-style but is reset to the dash-offset between each sequence of joined lines.

The unit of measure for dashes is the same as in the ordinary coordinate system. Ideally, a dash length is measured along the slope of the line, but implementations are only required to match this ideal for horizontal and vertical lines. Failing the ideal semantics, it is suggested that the length be measured along the major axis of the line. The major axis is defined as the x axis for

lines drawn at an angle of between -45 and +45 degrees or between 135 and 225 degrees from the x axis. For all other lines, the major axis is the y axis.

SetFontPath

```
path: LISTofSTRING8
Errors: Value
```

This request defines the search path for font lookup. There is only one search path per server, not one per client. The interpretation of the strings is operating-system-dependent, but the strings are intended to specify directories to be searched in the order listed.

Setting the path to the empty list restores the default path defined for the server.

As a side effect of executing this request, the server is guaranteed to flush all cached information about fonts for which there currently are no explicit resource IDs allocated.

The meaning of an error from this request is system-specific.

SetInputFocus

```
focus: WINDOW or PointerRoot or None
revert-to: {Parent, PointerRoot, None}
time: TIMESTAMP or CurrentTime
Errors: Match, Value, Window
```

This request changes the input focus and the last-focus-change time. The request has no effect if the specified time is earlier than the current last-focus-change time or is later than the current server time. Otherwise, the last-focus-change time is set to the specified time with *CurrentTime* replaced by the current server time.

If *None* is specified as the focus, all keyboard events are discarded until a new focus window is set. In this case, the revert-to argument is ignored.

If a window is specified as the focus, it becomes the keyboard's focus window. If a generated keyboard event would normally be reported to this window or one of its inferiors, the event is reported normally. Otherwise, the event is reported with respect to the focus window.

If *PointerRoot* is specified as the focus, the focus window is dynamically taken to be the root window of whatever screen the pointer is on at each keyboard event. In this case, the revert-to argument is ignored.

This request generates *FocusIn* and *FocusOut* events.

The specified focus window must be viewable at the time of the request (or a *Match* error results). If the focus window later becomes not viewable, the new focus window depends on the revert-to argument. If revert-to is *Parent*, the focus reverts to the parent (or the closest viewable ancestor) and the new revert-to value is taken to be *None*. If revert-to is *PointerRoot* or *None*, the focus reverts to that value. When the focus reverts, *FocusIn* and *FocusOut* events are generated, but the last-focus-change time is not affected.

SetModifierMapping

```
keycodes-per-modifier: CARD8
keycodes: LISTofKEYCODE

=>
status: {Success, Busy , Failed}
Errors: Alloc, Value
```

This request specifies the keycodes (if any) of the keys to be used as modifiers. The number of keycodes in the list must be 8*keycodes-per-modifier (or a *Length* error results). The keycodes are divided into eight sets, with each set containing keycodes-per-modifier elements. The sets are assigned to the modifiers *Shift*, *Lock*, *Control*, *Mod1*, *Mod2*, *Mod3*, *Mod4* and *Mod5*, in order. Only non-zero keycode values are used within each set; zero values are ignored. All of the non-zero keycodes must be in the range specified by min-keycode and max-keycode in the connection setup (or a *Value* error results). The order of keycodes within a set does not matter. If no non-zero values are specified in a set, the use of the corresponding modifier is disabled, and the modifier bit will always be zero. Otherwise, the modifier bit will be one whenever at least one of the keys in the corresponding set is in the down position.

A server can impose restrictions on how modifiers can be changed (for example, if certain keys do not generate up transitions in hardware, if auto-repeat cannot be disabled on certain keys, or if multiple keys per modifier are not supported). The status reply is *Failed* if some such restriction is violated, and none of the modifiers is changed.

If the new non-zero keycodes specified for a modifier differ from those currently defined and any (current or new) keys for that modifier are logically in the down state, then the status reply is *Busy*, and none of the modifiers is changed.

This request generates a MappingNotify event on a Success status.

SetPointerMapping

```
map: LISTofCARD8
=>
status: {Success, Busy}
Errors: Value
```

This request sets the mapping of the pointer. Elements of the list are indexed starting from one. The length of the list must be the same as *GetPointerMapping* would return (or a *Value* error results). The index is a core button number, and the element of the list defines the effective number.

A zero element disables a button. Elements are not restricted in value by the number of physical buttons, but no two elements can have the same non-zero value (or a *Value* error results).

If any of the buttons to be altered are logically in the down state, the status reply is *Busy*, and the mapping is not changed.

This request generates a *MappingNotify* event on a *Success* status.

SetScreenSaver

```
timeout, interval: INT16
prefer-blanking: {Yes, No, Default}
allow-exposures: {Yes, No, Default}
Errors: Value
```

The timeout and interval are specified in seconds; setting a value to -1 restores the default. Other negative values generate a *Value* error. If the timeout value is zero, screen-saver is disabled (but an activated screen-saver is not deactivated). If the timeout value is non-zero, screen-saver is enabled. Once screen-saver is enabled, if no input from the keyboard or pointer is generated for timeout seconds, screen-saver is activated. For each screen, if blanking is preferred and the hardware supports video blanking, the screen will simply go blank. Otherwise, if either exposures are allowed or the screen can be regenerated without sending exposure events to clients, the screen is changed in a server-dependent fashion to avoid phosphor burn. Otherwise, the state of the screens does not change, and screen-saver is not activated. At the next keyboard or pointer input or at the next *ForceScreenSaver* with mode *Reset*, screen-saver is deactivated, and all screen states are restored.

If the server-dependent screen-saver method is amenable to periodic change, interval serves as a hint about how long the change period should be, with zero hinting that no periodic change should be made. Examples of ways to change the screen include scrambling the color map periodically, moving an icon image about the screen periodically, or tiling the screen with the root window background tile, randomly reorigined periodically.

SetSelectionOwner

```
selection: ATOM
owner: WINDOW or None
time: TIMESTAMP or CurrentTime
Errors: Atom, Window
```

This request changes the owner, owner window, and last-change time of the specified selection. This request has no effect if the specified time is earlier than the current last-change time of the specified selection or is later than the current server time. Otherwise, the last-change time is set to the specified time with *CurrentTime* replaced by the current server time. If the owner window is specified as *None*, then the owner of the selection becomes *None* (that is, no owner). Otherwise, the owner of the selection becomes the client executing the request. If the new owner (whether a client or *None*) is not the same as the current owner and the current owner is not *None*, then the current owner is sent a *SelectionClear* event.

If the client that is the owner of a selection is later terminated (that is, its connection is closed) or if the owner window it has specified in the request is later destroyed, then the owner of the selection automatically reverts to *None*, but the last-change time is not affected.

The selection atom is uninterpreted by the server. The owner window is returned by the *GetSelectionOwner* request and is reported in *SelectionRequest* and *SelectionClear* events.

Selections are global to the server.

StoreColors

This request changes the colormap entries of the specified pixels. The do-red, do-green and doblue fields indicate which components should actually be changed. If the colormap is an installed map for its screen, the changes are visible immediately.

All specified pixels that are allocated writable in cmap (by any client) are changed, even if one or more pixels produce an error. A *Value* error is generated if a specified pixel is not a valid index into cmap, and an *Access* error is generated if a specified pixel is unallocated or is allocated read-only. If more than one pixel is in error, it is arbitrary as to which pixel is reported.

StoreNamedColor

```
cmap: COLORMAP
pixel: CARD32
name: STRING8
do-red, do-green, do-blue: BOOL
Errors: Access, Colormap, Name, Value
```

This request looks up the named color with respect to the screen associated with cmap and then does a *StoreColors* in cmap. The name should use the ISO Latin-1 encoding, and upper case and lower case do not matter. The *Access* and *Value* errors are the same as in *StoreColors*.

TranslateCoordinates

```
src-window, dst-window: WINDOW
src-x, src-y: INT16

=>
same-screen: BOOL
child: WINDOW or None
dst-x, dst-y: INT16

Errors: Window
```

The src-x and src-y coordinates are taken relative to src-window's origin and are returned as dst-x and dst-y coordinates relative to dst-window's origin. If same-screen is *False*, then src-window and dst-window are on different screens, and dst-x and dst-y are zero. If the coordinates are contained in a mapped child of dst-window, then that child is returned.

UngrabButton

modifiers: SETofKEYMASK or AnyModifier

button: BUTTON or AnyButton

grab-window: WINDOW

Errors: Value, Window

This request releases the passive button/key combination on the specified window if it was grabbed by this client. A modifiers argument of *AnyModifier* is equivalent to issuing the request for all possible modifier combinations (including the combination of no modifiers). A button of *AnyButton* is equivalent to issuing the request for all possible buttons. The request has no effect on an active grab.

UngrabKey

key: KEYCODE or AnyKey
modifiers: SETofKEYMASK or AnyModifier
grab-window: WINDOW

Errors: Value, Window

This request releases the key combination on the specified window if it was grabbed by this client. A modifiers argument of *AnyModifier* is equivalent to issuing the request for all possible modifier combinations (including the combination of no modifiers). A key of *AnyKey* is equivalent to issuing the request for all possible keycodes. This request has no effect on an active grab.

UngrabKeyboard

```
time: TIMESTAMP or CurrentTime
```

This request releases the keyboard if this client has it actively grabbed (as a result of either *GrabKeyboard* or *GrabKey*) and releases any queued events. The request has no effect if the specified time is earlier than the last-keyboard-grab time or is later than the current server time.

This request generates *FocusIn* and *FocusOut* events.

An *UngrabKeyboard* is performed automatically if the event window for an active keyboard grab becomes not viewable.

UngrabPointer

```
time: TIMESTAMP or CurrentTime
```

This request releases the pointer if this client has it actively grabbed (from either *GrabPointer* or *GrabButton* or from a normal button press) and releases any queued events. The request has no effect if the specified time is earlier than the last-pointer-grab time or is later than the current server time.

This request generates *EnterNotify* and *LeaveNotify* events.

An *UngrabPointer* request is performed automatically if the event window or confine-to window for an active pointer grab becomes not viewable or if window reconfiguration causes the confine-to window to lie completely outside the boundaries of the root window.

UngrabServer

This request restarts processing of requests and close-downs on other connections.

UninstallColormap

```
cmap: COLORMAP
Errors: Colormap
```

If cmap is on the required list for its screen (see *InstallColormap* request), it is removed from the list. As a side effect, cmap might be uninstalled, and additional colormaps might be implicitly installed or uninstalled. Which colormaps get installed or uninstalled is server-dependent except that the required list must remain installed.

If cmap becomes uninstalled, a *ColormapNotify* event is generated on every window having cmap as an attribute. In addition, for every other colormap that is installed or uninstalled as a result of the request, a *ColormapNotify* event is generated on every window having that colormap as an attribute.

UnmapSubwindows

```
window: WINDOW
Errors: Window
```

This request performs an *UnmapWindow* request on all mapped children of the window, in bottom-to-top stacking order.

UnmapWindow

```
window: WINDOW
Errors: Window
```

If the window is already unmapped, this request has no effect. Otherwise, the window is unmapped, and an *UnmapNotify* event is generated. Normal exposure processing on formerly obscured windows is performed.

WarpPointer

```
src-window: WINDOW or None
dst-window: WINDOW or None
src-x, src-y: INT16
src-width, src-height: CARD16
dst-x, dst-y: INT16
Errors: Window
```

If dst-window is *None*, this request moves the pointer by offsets [dst-x, dst-y] relative to the current position of the pointer. If dst-window is a window, this request moves the pointer to [dst-x, dst-y] relative to dst-window's origin. However, if src-window is not *None*, the move only takes place if src-window contains the pointer and the pointer is contained in the specified rectangle of src-window.

The src-x and src-y coordinates are relative to src-window's origin. If src-height is zero, it is replaced with the current height of src-window minus src-y. If src-width is zero, it is replaced with the current width of src-window minus src-x.

Requests

This request cannot be used to move the pointer outside the confine-to window of an active pointer grab. An attempt will only move the pointer as far as the closest edge of the confine-to window.

This request will generate events just as if the user had instantaneously moved the pointer.

Requests



5.1 General Notes

When a button press is processed with the pointer in some window W and no active pointer grab is in progress, the ancestors of W are searched from the root down, looking for a passive grab to activate. If no matching passive grab on the button exists, then an active grab is started automatically for the client receiving the event, and the last-pointer-grab time is set to the current server time. The effect is essentially equivalent to a *GrabButton* with arguments:

Argument	Value
event-window	Event window
event-mask	Client's selected pointer events on the event window
pointer-mode and keyboard-mode	Asynchronous
owner-events	<i>True</i> if the client has <i>OwnerGrabButton</i> selected on the event window, otherwise <i>False</i>
confine-to	None
cursor	None

The grab is terminated automatically when the logical state of the pointer has all buttons released. *UngrabPointer* and *ChangeActivePointerGrab* can both be used to modify the active grab.

KeyPress, KeyRelease, ButtonPress, ButtonRelease, MotionNotify

```
root, event: WINDOW
child: WINDOW or None
same-screen: BOOL
root-x, root-y, event-x, event-y: INT16
detail: <see below>
state: SETofKEYBUTMASK
time: TIMESTAMP
```

These events are generated either when a key or button logically changes state or when the pointer logically moves. The generation of these logical changes may lag the physical changes if device event processing is frozen. Note that *KeyPress* and *KeyRelease* are generated for all keys, even those mapped to modifier bits. The source of the event is the window the pointer is in. The window the event is reported with respect to is called the event window. The event window is found by starting with the source window and looking up the hierarchy for the first window on which any client has selected interest in the event (provided no intervening window prohibits event generation by including the event type in its do-not-propagate-mask). The actual window used for reporting can be modified by active grabs and, in the case of keyboard events, can be modified by the focus window.

The root is the root window of the source window, and root-x and root-y are the pointer coordinates relative to root's origin at the time of the event. Event is the event window. If the event window is on the same screen as root, then event-x and event-y are the pointer coordinates relative to the event window's origin. Otherwise, event-x and event-y are zero. If

General Notes Events

the source window is an inferior of the event window, then child is set to the child of the event window that is an ancestor of (or is) the source window. Otherwise, it is set to *None*. The state component gives the logical state of the buttons and modifier keys just before the event. The detail component type varies with the event type:

Event	Component
KeyPress, KeyRelease	KEYCODE
ButtonPress, ButtonRelease	BUTTON
MotionNotify	{Normal, Hint}

MotionNotify events are only generated when the motion begins and ends in the window. The granularity of motion events is not guaranteed, but a client selecting for motion events is guaranteed to get at least one event when the pointer moves and comes to rest. Selecting PointerMotion receives events independent of the state of the pointer buttons. By selecting some subset of Button[1-5]Motion instead, MotionNotify events will only be received when one or more of the specified buttons are pressed. By selecting ButtonMotion, MotionNotify events will be received only when at least one button is pressed. The events are always of type MotionNotify, independent of the selection. If PointerMotionHint is selected, the server is free to send only one MotionNotify event (with detail Hint) to the client for the event window until either the key or button state changes, the pointer leaves the event window, or the client issues a QueryPointer or GetMotionEvents request.

Events Enter/Leave Events

5.2 Enter/Leave Events

EnterNotify, LeaveNotify

If pointer motion or window hierarchy change causes the pointer to be in a different window than before, *EnterNotify* and *LeaveNotify* events are generated instead of a *MotionNotify* event. Only clients selecting *EnterWindow* on a window receive *EnterNotify* events, and only clients selecting *LeaveWindow* receive *LeaveNotify* events. The pointer position reported in the event is always the final position, not the initial position of the pointer. The root is the root window for this position, and root-x and root-y are the pointer coordinates relative to root's origin at the time of the event. Event is the event window. If the event window is on the same screen as root, then event-x and event-y are the pointer coordinates relative to the event window's origin. Otherwise, event-x and event-y are zero. In a *LeaveNotify* event, if a child of the event window contains the initial position of the pointer, then the child component is set to that child. Otherwise, it is *None*. For an *EnterNotify* event, if a child of the event window contains the final pointer position, then the child component is set to that child. Otherwise, it is *None*. If the event window is the focus window or an inferior of the focus window, then focus is *True*. Otherwise, focus is *False*.

Normal pointer motion events have mode *Normal*. Pseudo-motion events when a grab activates have mode *Grab*, and pseudo-motion events when a grab deactivates have mode *Ungrab*.

All *EnterNotify* and *LeaveNotify* events caused by a hierarchy change are generated after any hierarchy event caused by that change (that is, *UnmapNotify*, *MapNotify*, *ConfigureNotify*, *GravityNotify*, *CirculateNotify*), but the ordering of *EnterNotify* and *LeaveNotify* events with respect to *FocusOut*, *VisibilityNotify* and *Expose* events is not constrained.

Normal events are generated as follows:

When the pointer moves from window A to window B and A is an inferior of B:

- *LeaveNotify* with detail *Ancestor* is generated on A.
- *LeaveNotify* with detail *Virtual* is generated on each window between A and B exclusive (in that order).
- EnterNotify with detail Inferior is generated on B.

When the pointer moves from window A to window B and B is an inferior of A:

- *LeaveNotify* with detail *Inferior* is generated on A.
- *EnterNotify* with detail *Virtual* is generated on each window between A and B exclusive (in that order).
- *EnterNotify* with detail *Ancestor* is generated on B.

Enter/Leave Events Events

When the pointer moves from window A to window B and window C is their least common ancestor:

- LeaveNotify with detail Nonlinear is generated on A.
- LeaveNotify with detail NonlinearVirtual is generated on each window between A and C exclusive (in that order).
- *EnterNotify* with detail *NonlinearVirtual* is generated on each window between C and B exclusive (in that order).
- EnterNotify with detail Nonlinear is generated on B.

When the pointer moves from window A to window B on different screens:

- LeaveNotify with detail Nonlinear is generated on A.
- If A is not a root window, *LeaveNotify* with detail *NonlinearVirtual* is generated on each window above A up to and including its root (in order).
- If B is not a root window, *EnterNotify* with detail *NonlinearVirtual* is generated on each window from B's root down to but not including B (in order).
- EnterNotify with detail Nonlinear is generated on B.

When a pointer grab activates (but after any initial warp into a confine-to window and before generating any actual *ButtonPress* event that activates the grab), G is the grab-window for the grab, and P is the window the pointer is in:

- *EnterNotify* and *LeaveNotify* events with mode *Grab* are generated (as for *Normal* above) as if the pointer were to suddenly warp from its current position in P to some position in G. However, the pointer does not warp, and the pointer position is used as both the initial and final positions for the events.
 - When a pointer grab deactivates (but after generating any actual *ButtonRelease* event that deactivates the grab), G is the grab-window for the grab, and P is the window the pointer is in:
- EnterNotify and LeaveNotify events with mode Ungrab are generated (as for Normal above) as if the pointer were to suddenly warp from some position in G to its current position in P. However, the pointer does not warp, and the current pointer position is used as both the initial and final positions for the events.

Events Focus Events

5.3 Focus Events

FocusIn, FocusOut

These events are generated when the input focus changes and are reported to clients selecting *FocusChange* on the window. Events generated by *SetInputFocus* when the keyboard is not grabbed have mode *Normal*. Events generated by *SetInputFocus* when the keyboard is grabbed have mode *WhileGrabbed*. Events generated when a keyboard grab activates have mode *Grab*, and events generated when a keyboard grab deactivates have mode *Ungrab*.

All *FocusOut* events caused by a window unmap are generated after any *UnmapNotify* event, but the ordering of *FocusOut* with respect to generated *EnterNotify*, *LeaveNotify*, *VisibilityNotify* and *Expose* events is not constrained.

Normal and *WhileGrabbed* events are generated as follows:

When the focus moves from window A to window B, A is an inferior of B, and the pointer is in window P:

- *FocusOut* with detail *Ancestor* is generated on A.
- *FocusOut* with detail *Virtual* is generated on each window between A and B exclusive (in order).
- FocusIn with detail Inferior is generated on B.
- If P is an inferior of B but P is not A or an inferior of A or an ancestor of A, *FocusIn* with detail *Pointer* is generated on each window below B down to and including P (in order).

When the focus moves from window A to window B, B is an inferior of A, and the pointer is in window P:

- If P is an inferior of A but P is not an inferior of B or an ancestor of B, *FocusOut* with detail *Pointer* is generated on each window from P up to but not including A (in order).
- *FocusOut* with detail *Inferior* is generated on A.
- FocusIn with detail Virtual is generated on each window between A and B exclusive (in order).
- FocusIn with detail Ancestor is generated on B.

When the focus moves from window A to window B, window C is their least common ancestor, and the pointer is in window P:

- If P is an inferior of A, *FocusOut* with detail *Pointer* is generated on each window from P up to but not including A (in order).
- FocusOut with detail Nonlinear is generated on A.
- *FocusOut* with detail *NonlinearVirtual* is generated on each window between A and C exclusive (in order).
- FocusIn with detail NonlinearVirtual is generated on each window between C and B exclusive (in order).

Focus Events Events

- FocusIn with detail Nonlinear is generated on B.
- If P is an inferior of B, *FocusIn* with detail *Pointer* is generated on each window below B down to and including P (in order).

When the focus moves from window A to window B on different screens and the pointer is in window P:

- If P is an inferior of A, *FocusOut* with detail *Pointer* is generated on each window from P up to but not including A (in order).
- FocusOut with detail Nonlinear is generated on A.
- If A is not a root window, *FocusOut* with detail *NonlinearVirtual* is generated on each window above A up to and including its root (in order).
- If B is not a root window, *FocusIn* with detail *NonlinearVirtual* is generated on each window from B's root down to but not including B (in order).
- FocusIn with detail Nonlinear is generated on B.
- If P is an inferior of B, *FocusIn* with detail *Pointer* is generated on each window below B down to and including P (in order).

When the focus moves from window A to PointerRoot (or None) and the pointer is in window P:

- If P is an inferior of A, *FocusOut* with detail *Pointer* is generated on each window from P up to but not including A (in order).
- FocusOut with detail Nonlinear is generated on A.
- If A is not a root window, *FocusOut* with detail *NonlinearVirtual* is generated on each window above A up to and including its root (in order).
- FocusIn with detail PointerRoot (or None) is generated on all root windows.
- If the new focus is *PointerRoot*, *FocusIn* with detail *Pointer* is generated on each window from P's root down to and including P (in order).

When the focus moves from *PointerRoot* (or *None*) to window A and the pointer is in window P:

- If the old focus is *PointerRoot*, *FocusOut* with detail *Pointer* is generated on each window from P up to and including P's root (in order).
- FocusOut with detail PointerRoot (or None) is generated on all root windows.
- If A is not a root window, *FocusIn* with detail *NonlinearVirtual* is generated on each window from A's root down to but not including A (in order).
- *FocusIn* with detail *Nonlinear* is generated on A.
- If P is an inferior of A, *FocusIn* with detail *Pointer* is generated on each window below A down to and including P (in order).

When the focus moves from *PointerRoot* to *None* (or *vice versa*) and the pointer is in window P:

- If the old focus is *PointerRoot*, *FocusOut* with detail *Pointer* is generated on each window from P up to and including P's root (in order).
- FocusOut with detail PointerRoot (or None) is generated on all root windows.
- FocusIn with detail None (or PointerRoot) is generated on all root windows.
- If the new focus is *PointerRoot*, *FocusIn* with detail *Pointer* is generated on each window from P's root down to and including P (in order).

Events Focus Events

When a keyboard grab activates (but before generating any actual *KeyPress* event that activates the grab), G is the grab-window for the grab, and F is the current focus:

• *FocusIn* and *FocusOut* events with mode *Grab* are generated (as for *Normal* above) as if the focus were to change from F to G.

When a keyboard grab deactivates (but after generating any actual *KeyRelease* event that deactivates the grab), G is the grab-window for the grab, and F is the current focus:

• *FocusIn* and *FocusOut* events with mode *Ungrab* are generated (as for *Normal* above) as if the focus were to change from G to F.

Other Events Events

5.4 Other Events

CirculateNotify

```
event, window: WINDOW
place: {Top, Bottom}
```

This event is reported to clients selecting *StructureNotify* on the window and to clients selecting *SubstructureNotify* on the parent. It is generated when the window is actually restacked from a *CirculateWindow* request. The event is the window on which the event was generated, and the window is the window that is restacked. If place is *Top*, the window is now on top of all siblings. Otherwise, it is below all siblings.

CirculateRequest

```
parent, window: WINDOW
place: {Top, Bottom}
```

This event is reported to the client selecting *SubstructureRedirect* on the parent and is generated when a *CirculateWindow* request is issued on the parent and a window actually needs to be restacked. The window specifies the window to be restacked, and the place specifies what the new position in the stacking order should be.

ClientMessage

```
window: WINDOW
type: ATOM
format: {8, 16, 32}
data: LISTofINT8 or LISTofINT16 or LISTofINT32
```

This event is only generated by clients using *SendEvent*. The type specifies how the data is to be interpreted by the receiving client; the server places no interpretation on the type or the data. The format specifies whether the data should be viewed as a list of 8-bit, 16-bit, or 32-bit quantities, so that the server can correctly byte-swap, as necessary. The data always consists of either 20 8-bit values or 10 16-bit values or 5 32-bit values, although particular message types might not make use of all of these values.

ColormapNotify

```
window: WINDOW
colormap: COLORMAP or None
new: BOOL
state: {Installed, Uninstalled}
```

This event is reported to clients selecting *ColormapChange* on the window. It is generated with value *True* for new when the colormap attribute of the window is changed and is generated with value *False* for new when the colormap of a window is installed or uninstalled. In either case, the state indicates whether the colormap is currently installed.

Events Other Events

ConfigureNotify

```
event, window: WINDOW
x, y: INT16
width, height, border-width: CARD16
above-sibling: WINDOW or None
override-redirect: BOOL
```

This event is reported to clients selecting *StructureNotify* on the window and to clients selecting *SubstructureNotify* on the parent. It is generated when a *ConfigureWindow* request actually changes the state of the window. The event is the window on which the event was generated, and the window is the window that is changed. The x and y coordinates are relative to the new parent's origin and specify the position of the upper-left outer corner of the window. The width and height specify the inside size, not including the border. If above-sibling is *None*, then the window is on the bottom of the stack with respect to siblings. Otherwise, the window is immediately on top of the specified sibling. The override-redirect flag is from the window's attribute.

ConfigureRequest

This event is reported to the client selecting *SubstructureRedirect* on the parent and is generated when a *ConfigureWindow* request is issued on the window by some other client. The value-mask indicates which components were specified in the request. The value-mask and the corresponding values are reported as given in the request. The remaining values are filled in from the current geometry of the window, except in the case of sibling and stack-mode, which are reported as *None* and *Above* (respectively) if not given in the request.

CreateNotify

```
parent, window: WINDOW
x, y: INT16
width, height, border-width: CARD16
override-redirect: BOOL
```

This event is reported to clients selecting *SubstructureNotify* on the parent and is generated when the window is created. The arguments are as in the *CreateWindow* request.

DestroyNotify

```
event, window: WINDOW
```

This event is reported to clients selecting *StructureNotify* on the window and to clients selecting *SubstructureNotify* on the parent. It is generated when the window is destroyed. The event is the window on which the event was generated, and the window is the window that is destroyed.

The ordering of the *DestroyNotify* events is such that for any given window, *DestroyNotify* is generated on all inferiors of the window before being generated on the window itself. The ordering among siblings and across subhierarchies is not otherwise constrained.

Other Events Events

Expose

```
window: WINDOW
x, y, width, height: CARD16
count: CARD16
```

This event is reported to clients selecting *Exposure* on the window. It is generated when no valid contents are available for regions of a window, and either the regions are visible, the regions are viewable and the server is (perhaps newly) maintaining backing store on the window, or the window is not viewable but the server is (perhaps newly) honouring window's backing-store attribute of *Always* or *WhenMapped*. The regions are decomposed into an arbitrary set of rectangles, and an *Expose* event is generated for each rectangle.

For a given action causing exposure events, the set of events for a given window are guaranteed to be reported contiguously. If count is zero, then no more *Expose* events for this window follow. If count is non-zero, then at least that many more *Expose* events for this window follow (and possibly more).

The x and y coordinates are relative to window's origin and specify the upper-left corner of a rectangle. The width and height specify the extent of the rectangle.

Expose events are never generated on *InputOnly* windows.

All Expose events caused by a hierarchy change are generated after any hierarchy event caused by that change (for example, UnmapNotify, MapNotify, ConfigureNotify, GravityNotify, CirculateNotify). All Expose events on a given window are generated after any VisibilityNotify event on that window, but it is not required that all Expose events on all windows be generated after all Visibilitity events on all windows. The ordering of Expose events with respect to FocusOut, EnterNotify and LeaveNotify events is not constrained.

GraphicsExposure

```
drawable: DRAWABLE
x, y, width, height: CARD16
count: CARD16
major-opcode: CARD8
minor-opcode: CARD16
```

This event is reported to clients selecting graphics-exposures in a graphics context and is generated when a destination region could not be computed due to an obscured or out-of-bounds source region. All of the regions exposed by a given graphics request are guaranteed to be reported contiguously. If count is zero then no more *GraphicsExposure* events for this window follow. If count is non-zero, then at least that many more *GraphicsExposure* events for this window follow (and possibly more).

The x and y coordinates are relative to drawable's origin and specify the upper-left corner of a rectangle. The width and height specify the extent of the rectangle.

The major and minor opcodes identify the graphics request used. For the core protocol, major-opcode is always *CopyArea* or *CopyPlane*, and minor-opcode is always zero.

Events Other Events

GravityNotify

```
event, window: WINDOW
x, y: INT16
```

This event is reported to clients selecting *SubstructureNotify* on the parent and to clients selecting *StructureNotify* on the window. It is generated when a window is moved because of a change in size of the parent. The event is the window on which the event was generated, and the window is the window that is moved. The x and y coordinates are relative to the new parent's origin and specify the position of the upper-left outer corner of the window.

KeymapNotify

```
keys: LISTofCARD8
```

The value is a bit vector as described in *QueryKeymap*. This event is reported to clients selecting *KeymapState* on a window and is generated immediately after every *EnterNotify* and *FocusIn*.

MapNotify

```
event, window: WINDOW
override-redirect: BOOL
```

This event is reported to clients selecting *StructureNotify* on the window and to clients selecting *SubstructureNotify* on the parent. It is generated when the window changes state from unmapped to mapped. The event is the window on which the event was generated, and the window is the window that is mapped. The override-redirect flag is from the window's attribute.

MappingNotify

```
request: {Modifier, Keyboard, Pointer}
first-keycode, count: CARD8
```

This event is sent to all clients. There is no mechanism to express disinterest in this event. The detail indicates the kind of change that occurred: *Modifiers* for a successful *SetModifierMapping*, *Keyboard* for a successful *ChangeKeyboardMapping*, and *Pointer* for a successful *SetPointerMapping*. If the detail is *Keyboard*, then first-keycode and count indicate the range of altered keycodes.

MapRequest

```
parent, window: WINDOW
```

This event is reported to the client selecting *SubstructureRedirect* on the parent and is generated when a *MapWindow* request is issued on an unmapped window with an override-redirect attribute of *False*.

NoExposure

```
drawable: DRAWABLE
major-opcode: CARD8
minor-opcode: CARD16
```

This event is reported to clients selecting graphics-exposures in a graphics context and is generated when a graphics request that might produce *GraphicsExposure* events does not produce any. The drawable specifies the destination used for the graphics request.

The major and minor opcodes identify the graphics request used. For the core protocol, major-opcode is always *CopyPlane*, and the minor-opcode is always zero.

Other Events Events

PropertyNotify

```
window: WINDOW
atom: ATOM
state: {NewValue, Deleted}
time: TIMESTAMP
```

This event is reported to clients selecting *PropertyChange* on the window and is generated with state *NewValue* when a property of the window is changed using *ChangeProperty* or *RotateProperties*, even when adding zero-length data using *ChangeProperty* and when replacing all or part of a property with identical data using *ChangeProperty* or *RotateProperties*. It is generated with state *Deleted* when a property of the window is deleted using request *DeleteProperty* or *GetProperty*. The timestamp indicates the server time when the property was changed.

ReparentNotify

```
event, window, parent: WINDOW
x, y: INT16
override-redirect: BOOL
```

This event is reported to clients selecting *SubstructureNotify* on either the old or the new parent and to clients selecting *StructureNotify* on the window. It is generated when the window is reparented. The event is the window on which the event was generated. The window is the window that has been rerooted. The parent specifies the new parent. The x and y coordinates are relative to the new parent's origin and specify the position of the upper-left outer corner of the window. The override-redirect flag is from the window's attribute.

ResizeRequest

```
window: WINDOW
width, height: CARD16
```

This event is reported to the client selecting *ResizeRedirect* on the window and is generated when a *ConfigureWindow* request by some other client on the window attempts to change the size of the window. The width and height are the inside size, not including the border.

SelectionClear

owner: WINDOW
selection: ATOM
time: TIMESTAMP

This event is reported to the current owner of a selection and is generated when a new owner is being defined by means of *SetSelectionOwner*. The timestamp is the last-change time recorded for the selection. The owner argument is the window that was specified by the current owner in its *SetSelectionOwner* request.

Events Other Events

SelectionNotify

requestor: WINDOW
selection, target: ATOM
property: ATOM or None
time: TIMESTAMP or CurrentTime

This event is generated by the server in response to a *ConvertSelection* request when there is no owner for the selection. When there is an owner, it should be generated by the owner using *SendEvent*. The owner of a selection should send this event to a requestor either when a selection has been converted and stored as a property or when a selection conversion could not be performed (indicated with property *None*).

SelectionRequest

owner: WINDOW
selection: ATOM
target: ATOM

property: ATOM or None

requestor: WINDOW

time: TIMESTAMP or CurrentTime

This event is reported to the owner of a selection and is generated when a client issues a *ConvertSelection* request. The owner argument is the window that was specified in the *SetSelectionOwner* request. The remaining arguments are as in the *ConvertSelection* request.

The owner should convert the selection based on the specified target type and send a *SelectionNotify* back to the requestor. A complete specification for using selections is given in the **ICCCM** specification.

UnmapNotify

```
event, window: WINDOW
from-configure: BOOL
```

This event is reported to clients selecting *StructureNotify* on the window and to clients selecting *SubstructureNotify* on the parent. It is generated when the window changes state from mapped to unmapped. The event is the window on which the event was generated, and the window is the window that is unmapped. The from-configure flag is *True* if the event was generated as a result of the window's parent being resized when the window itself had a win-gravity of *Unmap*.

VisibilityNotify

```
window: WINDOW
state: {Unobscured, PartiallyObscured, FullyObscured}
```

This event is reported to clients selecting *VisibilityChange* on the window. In the following, the state of the window is calculated ignoring all of the window's subwindows. When a window changes state from partially or fully obscured or not viewable to viewable and completely unobscured, an event with *Unobscured* is generated. When a window changes state from viewable and completely unobscured or not viewable, to viewable and partially obscured, an event with *PartiallyObscured* is generated. When a window changes state from viewable and completely unobscured, from viewable and partially obscured, or from not viewable to viewable and fully obscured, an event with *FullyObscured* is generated.

VisibilityNotify events are never generated on InputOnly windows.

Other Events Events

All VisibilityNotify events caused by a hierarchy change are generated after any hierarchy event caused by that change (for example, UnmapNotify, MapNotify, ConfigureNotify, GravityNotify, CirculateNotify). Any VisibilityNotify event on a given window is generated before any Expose events on that window, but it is not required that all VisibilityNotify events on all windows be generated before all Expose events on all windows. The ordering of VisibilityNotify events with respect to FocusOut, EnterNotify and LeaveNotify events is not constrained.

Appendix A KEYSYM Encoding

For convenience, KEYSYM values are viewed as split into four bytes:

- Byte 1 (for the purposes of this encoding) is the most-significant 5 bits (because of the 29-bit effective values).
- Byte 2 is the next most-significant 8 bits .
- Byte 3 is the next most-significant 8 bits.
- Byte 4 is the least-significant 8 bits.

There are two special KEYSYM values: NoSymbol and VoidSymbol. They are used to indicate the absence of symbols (see Section 3.2.1).

Byte 1	Byte 2	Byte 3	Byte 4	Name
0	0	0	0	NoSymbol
0	255	255	255	VoidSymbol

All other standard KEYSYM values have zero values for bytes 1 and 2. Byte 3 indicates a character code set, and byte 4 indicates a particular character within that set.

Byte 3	Byte 4
0	Latin 1
1	Latin 2
2	Latin 3
3	Latin 4
4	Kana
5	Arabic
6	Cyrillic
7	Greek
8	Technical
9	Special
10	Publishing
11	APL
12	Hebrew
255	Keyboard

Each character set contains gaps where codes have been removed that were duplicates with codes in previous character sets (that is, character sets with lesser byte 3 value).

The 94 and 96 character code sets have been moved to occupy the right-hand quadrant (decimal 129 through 256), so the ASCII subset has a unique encoding across byte 4, which corresponds to the ASCII character code. However, this cannot be guaranteed with future registrations and does not apply to all of the Keyboard set.

To the best of our knowledge, the Latin, Kana, Arabic, Cyrillic, Greek, APL and Hebrew sets are from the appropriate ISO and/or ECMA international standards. There are no Technical, Special, or Publishing international standards, so these sets are based on Digital Equipment Corporation standards.

The ordering between the sets (byte 3) is essentially arbitrary. National and international standards bodies were commencing deliberations regarding international 2-byte and 4-byte

character sets at the time these keysyms were developed, but we did not know of any proposed layouts.

The order may be arbitrary, but it is important in dealing with duplicate coding. As far as possible, keysym values (byte 4) follow the character set encoding standards, except for the Greek and Cyrillic keysyms which are based on early draft standards. In the Latin-1 to Latin-4 sets, all duplicate glyphs occupy the same code position. However, duplicates between Greek and Technical do not occupy the same code position. Applications that wish to use the Latin-2, Latin-3, Latin-4, Greek, Cyrillic or Technical sets may find it convenient to use arrays to transform the keysyms.

There is a difference between European and US usage of the names Pilcrow, Paragraph and Section, as follows:

US Name	European Name	Code Position in Latin-1
Section sign	Paragraph sign	10/07
Paragraph sign	Pilcrow sign	11/06

We have adopted the US names (by accident rather than by design).

The Keyboard set is a miscellaneous collection of commonly occurring keys on keyboards. Within this set, the keypad symbols are generally duplicates of symbols found on keys on the main part of the keyboard, but they are distinguished here because they often have a distinguishable semantics associated with them.

Keyboards tend to be comparatively standard with respect to the alphanumeric keys, but they differ radically on the miscellaneous function keys. Many function keys are left over from early timesharing days or are designed for a specific application. Keyboard layouts from large manufacturers tend to have lots of keys for every conceivable purpose, whereas small workstation manufacturers often add keys that are solely for support of some of their unique functionality. There are two ways of thinking about how to define keysyms for such a world:

- the Engraving approach
- the Common approach.

The Engraving approach is to create a keysym for every unique key engraving. This is effectively taking the union of all key engravings on all keyboards. For example, some keyboards label function keys across the top as F1 through Fn, and others label them as PF1 through PFn. These would be different keys under the Engraving approach. Likewise, Lock would differ from Shift Lock, which is different from the up-arrow symbol that has the effect of changing lower case to upper case. There are lots of other aliases such as Del, DEL, Delete, Remove, and so forth. The Engraving approach makes it easy to decide if a new entry should be added to the keysym set: if it does not exactly match an existing one, then a new one is created. One estimate is that there would be on the order of 300–500 Keyboard keysyms using this approach, without counting foreign translations and variations.

The Common approach tries to capture all of the keys present on an interesting number of keyboards, folding likely aliases into the same keysym. For example, Del, DEL, and Delete are all merged into a single keysym. Vendors would be expected to augment the keysym set (using the vendor-specific encoding space) to include all of their unique keys that were not included in the standard set. Each vendor decides which of its keys map into the standard keysyms, which presumably can be overridden by a user. It is more difficult to implement this approach, because judgement is required about when a sufficient set of keyboards implements an engraving to justify making it a keysym in the standard set and about which engravings should be merged into a single keysym. Under this scheme there are an estimated 100–150 keysyms.

KEYSYM Encoding

Although neither scheme is perfect or elegant, the Common approach has been selected because it makes it easier to write a portable application. Having the Delete functionality merged into a single keysym allows an application to implement a deletion function and expect reasonable bindings on a wide set of workstations. Under the Common approach, application writers are still free to look for and interpret vendor-specific keysyms, but because they are in the extended set, the application developer is more conscious that they are writing the application in a nonportable fashion.

In the listings below, Code Pos is a representation of byte 4 of the KEYSYM value, expressed as most-significant/least-significant 4-bit values. The Code Pos numbers are for reference only and do not affect the KEYSYM value. In all cases, the KEYSYM value is:

byte3 * 256 + byte4

		Code		
Byte 3	Byte 4	Position	Name	Set
000	032	02/00	SPACE	Latin-1
000	033	02/01	EXCLAMATION POINT	Latin-1
000	034	02/02	QUOTATION MARK	Latin-1
000	035	02/03	NUMBER SIGN	Latin-1
000	036	02/04	DOLLAR SIGN	Latin-1
000	037	02/05	PERCENT SIGN	Latin-1
000	038	02/06	AMPERSAND	Latin-1
000	039	02/07	APOSTROPHE	Latin-1
000	040	02/08	LEFT PARENTHESIS	Latin-1
000	041	02/09	RIGHT PARENTHESIS	Latin-1
000	042	02/10	ASTERISK	Latin-1
000	043	02/11	PLUS SIGN	Latin-1
000	044	02/12	COMMA	Latin-1
000	045	02/13	MINUS SIGN	Latin-1
000	046	02/14	FULL STOP	Latin-1
000	047	02/15	SOLIDUS	Latin-1
000	048	03/00	DIGIT ZERO	Latin-1
000	049	03/01	DIGIT ONE	Latin-1
000	050	03/02	DIGIT TWO	Latin-1
000	051	03/02	DIGIT THREE	Latin-1
000	052	03/04	DIGIT FOUR	Latin-1
000	053	03/04 $03/05$	DIGIT FIVE	Latin-1
000	054	03/06	DIGIT SIX	Latin-1
000	055	03/00	DIGIT SEVEN	Latin-1
000	056	03/07	DIGIT EIGHT	Latin-1
000 000	057 058	03/09 03/10	DIGIT NINE COLON	Latin-1
	059			Latin-1
000		03/11 03/12	SEMICOLON LESS THAN SIGN	Latin-1
000	060		LESS THAN SIGN	Latin-1
000	061	03/13	EQUALS SIGN	Latin-1
000	062	03/14	GREATER THAN SIGN	Latin-1
000	063	03/15	QUESTION MARK	Latin-1
000	064	04/00	COMMERCIAL AT	Latin-1
000	065	04/01	LATIN CAPITAL LETTER A	Latin-1
000	066	04/02	LATIN CAPITAL LETTER B	Latin-1
000	067	04/03	LATIN CAPITAL LETTER C	Latin-1
000	068	04/04	LATIN CAPITAL LETTER D	Latin-1
000	069	04/05	LATIN CAPITAL LETTER E	Latin-1
000	070	04/06	LATIN CAPITAL LETTER F	Latin-1
000	071	04/07	LATIN CAPITAL LETTER G	Latin-1
000	072	04/08	LATIN CAPITAL LETTER H	Latin-1
000	073	04/09	LATIN CAPITAL LETTER I	Latin-1
000	074	04/10	LATIN CAPITAL LETTER J	Latin-1
000	075	04/11	LATIN CAPITAL LETTER K	Latin-1
000	076	04/12	LATIN CAPITAL LETTER L	Latin-1
000	077	04/13	LATIN CAPITAL LETTER M	Latin-1
000	078	04/14	LATIN CAPITAL LETTER N	Latin-1
000	079	04/15	LATIN CAPITAL LETTER O	Latin-1
000	080	05/00	LATIN CAPITAL LETTER P	Latin-1
000	081	05/01	LATIN CAPITAL LETTER Q	Latin-1
000	082	05/02	LATIN CAPITAL LETTER R	Latin-1
000	083	05/03	LATIN CAPITAL LETTER S	Latin-1

Byte 3	Byte 4	Code Position	Name	Set
000	084	05/04	LATIN CAPITAL LETTER T	Latin-1
000	085	05/05	LATIN CAPITAL LETTER U	Latin-1
000	086	05/06	LATIN CAPITAL LETTER V	Latin-1
000	087	05/07	LATIN CAPITAL LETTER W	Latin-1
000	088	05/08	LATIN CAPITAL LETTER X	Latin-1
000	089	05/09	LATIN CAPITAL LETTER Y	Latin-1
000	090	05/10	LATIN CAPITAL LETTER Z	Latin-1
000	091	05/11	LEFT SQUARE BRACKET	Latin-1
000	092	05/12	REVERSE SOLIDUS	Latin-1
000	093	05/13	RIGHT SQUARE BRACKET	Latin-1
000	094	05/14	CIRCUMFLEX ACCENT	Latin-1
000	095	05/15	LOW LINE	Latin-1
000	096	06/00	GRAVE ACCENT	Latin-1
000	097	06/01	LATIN SMALL LETTER a	Latin-1
000	098	06/02	LATIN SMALL LETTER b	Latin-1
000	099	06/03	LATIN SMALL LETTER c	Latin-1
000	100	06/04	LATIN SMALL LETTER d	Latin-1
000	101	06/05	LATIN SMALL LETTER e	Latin-1
000	102	06/06	LATIN SMALL LETTER f	Latin-1
000	103	06/07	LATIN SMALL LETTER g	Latin-1
000	104	06/08	LATIN SMALL LETTER h	Latin-1
000	105	06/09	LATIN SMALL LETTER i	Latin-1
000	106	06/10	LATIN SMALL LETTER j	Latin-1
000	107	06/11	LATIN SMALL LETTER k	Latin-1
000	108	06/12	LATIN SMALL LETTER I	Latin-1
000	109	06/12	LATIN SMALL LETTER m	Latin-1
000	110	06/14	LATIN SMALL LETTER II	Latin-1
000	111	06/15		
		07/00	LATIN SMALL LETTER o	Latin-1
000	112		LATIN SMALL LETTER p	Latin-1
000	113	07/01	LATIN SMALL LETTER q	Latin-1
000	114	07/02	LATIN SMALL LETTER r	Latin-1
000	115	07/03	LATIN SMALL LETTER s	Latin-1
000	116	07/04	LATIN SMALL LETTER t	Latin-1
000	117	07/05	LATIN SMALL LETTER u	Latin-1
000	118	07/06	LATIN SMALL LETTER v	Latin-1
000	119	07/07	LATIN SMALL LETTER W	Latin-1
000	120	07/08	LATIN SMALL LETTER x	Latin-1
000	121	07/09	LATIN SMALL LETTER y	Latin-1
000	122	07/10	LATIN SMALL LETTER z	Latin-1
000	123	07/11	LEFT CURLY BRACKET	Latin-1
000	124	07/12	VERTICAL LINE	Latin-1
000	125	07/13	RIGHT CURLY BRACKET	Latin-1
000	126	07/14	TILDE	Latin-1
000	160	10/00	NO-BREAK SPACE	Latin-1
000	161	10/01	INVERTED EXCLAMATION MARK	Latin-1
000	162	10/02	CENT SIGN	Latin-1
000	163	10/03	POUND SIGN	Latin-1
000	164	10/04	CURRENCY SIGN	Latin-1
000	165	10/05	YEN SIGN	Latin-1
000	166	10/06	BROKEN VERTICAL BAR	Latin-1
000	167	10/07	SECTION SIGN	Latin-1
000	168	10/08	DIAERESIS	Latin-1

		Code		
Byte 3	Byte 4	Position	Name	Set
000	169	10/09	COPYRIGHT SIGN	Latin-1
000	170	10/10	FEMININE ORDINAL INDICATOR	Latin-1
000	171	10/11	LEFT ANGLE QUOTATION MARK	Latin-1
000	172	10/12	NOT SIGN	Latin-1
000	173	10/13	HYPHEN	Latin-1
000	174	10/14	REGISTERED TRADEMARK SIGN	Latin-1
000	175	10/15	MACRON	Latin-1
000	176	11/00	DEGREE SIGN, RING ABOVE	Latin-1
000	177	11/01	PLUS-MINUS SIGN	Latin-1
000	178	11/02	SUPERSCRIPT TWO	Latin-1
000	179	11/03	SUPERSCRIPT THREE	Latin-1
000	180	11/04	ACUTE ACCENT	Latin-1
000	181	11/05	MICRO SIGN	Latin-1
000	182	11/06	PARAGRAPH SIGN	Latin-1
000	183	11/07	MIDDLE DOT	Latin-1
000	184	11/08	CEDILLA	Latin-1
000	185	11/09	SUPERSCRIPT ONE	Latin-1
000	186	11/10	MASCULINE ORDINAL INDICATOR	Latin-1
000	187	11/11	RIGHT ANGLE QUOTATION MARK	Latin-1
000	188	11/12	VULGAR FRACTION ONE QUARTER	Latin-1
000	189	11/13	VULGAR FRACTION ONE HALF	Latin-1
000	190	11/14	VULGAR FRACTION THREE QUARTERS	Latin-1
000	191	11/15	INVERTED QUESTION MARK	Latin-1
000	192	12/00	LATIN CAPITAL LETTER A WITH GRAVE ACCENT	Latin-1
000	193	12/01	LATIN CAPITAL LETTER A WITH ACUTE ACCENT	Latin-1
000	194	12/01 $12/02$	LATIN CAPITAL LETTER A WITH CIRCUMFLEX ACCENT	Latin-1
000	195	$\frac{12}{02}$	LATIN CAPITAL LETTER A WITH TILDE	Latin-1
000	196	12/03 $12/04$	LATIN CAPITAL LETTER A WITH DIAERESIS	Latin-1
000	197	$\frac{12}{04}$	LATIN CAPITAL LETTER A WITH BIAERESIS LATIN CAPITAL LETTER A WITH RING ABOVE	Latin-1
000	198	$\frac{12}{03}$	LATIN CAPITAL LETTER A WITH KING ABOVE LATIN CAPITAL DIPHTHONG AE	Latin-1
000	199	$\frac{12}{00}$	LATIN CAPITAL DIFITTIONG AE LATIN CAPITAL LETTER C WITH CEDILLA	Latin-1
000	200	$\frac{12}{07}$ $\frac{12}{08}$	LATIN CAPITAL LETTER C WITH CEDILLA LATIN CAPITAL LETTER E WITH GRAVE ACCENT	
				Latin-1
000	201 202	$\frac{12}{09}$ $\frac{12}{10}$	LATIN CAPITAL LETTER E WITH ACUTE ACCENT	Latin-1
000			LATIN CAPITAL LETTER E WITH CIRCUMFLEX ACCENT	Latin-1
000	203	12/11	LATIN CAPITAL LETTER E WITH DIAERESIS	Latin-1
000	204	$\frac{12}{12}$	LATIN CAPITAL LETTER I WITH GRAVE ACCENT	Latin-1
000	205	12/13	LATIN CAPITAL LETTER I WITH ACUTE ACCENT	Latin-1
000	206	12/14	LATIN CAPITAL LETTER I WITH CIRCUMFLEX ACCENT	Latin-1
000	207	12/15	LATIN CAPITAL LETTER I WITH DIAERESIS	Latin-1
000	208	13/00	ICELANDIC CAPITAL LETTER ETH	Latin-1
000	209	13/01	LATIN CAPITAL LETTER N WITH TILDE	Latin-1
000	210	13/02	LATIN CAPITAL LETTER O WITH GRAVE ACCENT	Latin-1
000	211	13/03	LATIN CAPITAL LETTER O WITH ACUTE ACCENT	Latin-1
000	212	13/04	LATIN CAPITAL LETTER O WITH CIRCUMFLEX ACCENT	Latin-1
000	213	13/05	LATIN CAPITAL LETTER O WITH TILDE	Latin-1
000	214	13/06	LATIN CAPITAL LETTER O WITH DIAERESIS	Latin-1
000	215	13/07	MULTIPLICATION SIGN	Latin-1
000	216	13/08	LATIN CAPITAL LETTER O WITH OBLIQUE STROKE	Latin-1
000	217	13/09	LATIN CAPITAL LETTER U WITH GRAVE ACCENT	Latin-1
000	218	13/10	LATIN CAPITAL LETTER U WITH ACUTE ACCENT	Latin-1
000	219	13/11	LATIN CAPITAL LETTER U WITH CIRCUMFLEX ACCENT	Latin-1
000	220	13/12	LATIN CAPITAL LETTER U WITH DIAERESIS	Latin-1

Ryta 3	Ryto 1	Code Position	Name	Set
000	221	13/13	LATIN CAPITAL LETTER Y WITH ACUTE ACCENT	Latin-1
000	222	13/13	ICELANDIC CAPITAL LETTER THORN	Latin-1
000	223	13/14	GERMAN SMALL LETTER SHARP s	Latin-1
000	224	14/00	LATIN SMALL LETTER A WITH GRAVE ACCENT	Latin-1
000	225	14/01	LATIN SMALL LETTER a WITH ACUTE ACCENT	Latin-1
000	226	14/01 $14/02$	LATIN SMALL LETTER a WITH ACCITE ACCENT LATIN SMALL LETTER a WITH CIRCUMFLEX ACCENT	Latin-1
000	227	14/02 $14/03$	LATIN SMALL LETTER A WITH CIRCONFLEX ACCENT	Latin-1
000	228	14/03	LATIN SMALL LETTER a WITH DIAERESIS	Latin-1
000	229	14/04 $14/05$	LATIN SMALL LETTER a WITH BIAERESIS LATIN SMALL LETTER a WITH RING ABOVE	Latin-1
000	230	14/06	LATIN SMALL DIPHTHONG ae	Latin-1
000	231	14/07	LATIN SMALL DITTITIONG AC LATIN SMALL LETTER C WITH CEDILLA	Latin-1
000	232	14/07	LATIN SMALL LETTER C WITH CEDILLA LATIN SMALL LETTER C WITH GRAVE ACCENT	Latin-1
000	233	14/08	LATIN SMALL LETTER & WITH GRAVE ACCENT LATIN SMALL LETTER & WITH ACUTE ACCENT	Latin-1
000	234	14/09 $14/10$	LATIN SMALL LETTER & WITH ACCTE ACCENT LATIN SMALL LETTER & WITH CIRCUMFLEX ACCENT	Latin-1
000	235	14/10	LATIN SMALL LETTER & WITH CIRCOMPLEX ACCENT LATIN SMALL LETTER & WITH DIAERESIS	Latin-1
000	236	14/11 $14/12$	LATIN SMALL LETTER & WITH DIAERESIS LATIN SMALL LETTER I WITH GRAVE ACCENT	Latin-1
000	237	14/12 $14/13$	LATIN SMALL LETTER I WITH GRAVE ACCENT LATIN SMALL LETTER I WITH ACUTE ACCENT	Latin-1
000	238	14/13	LATIN SMALL LETTER I WITH ACCITE ACCENT	Latin-1
000	239	14/14 $14/15$	LATIN SMALL LETTER I WITH CIRCUMPLEX ACCENT LATIN SMALL LETTER I WITH DIAERESIS	Latin-1
000	240	14/13 $15/00$	ICELANDIC SMALL LETTER ETH	Latin-1
000	241	15/00	LATIN SMALL LETTER n WITH TILDE	Latin-1
000	242	15/01 $15/02$	LATIN SMALL LETTER II WITH TILDE LATIN SMALL LETTER 0 WITH GRAVE ACCENT	Latin-1
000	243	15/02 $15/03$	LATIN SMALL LETTER 0 WITH ACUTE ACCENT	Latin-1
000	244	15/03 $15/04$	LATIN SMALL LETTER 0 WITH CIRCUMFLEX ACCENT	Latin-1
000	245	15/04 $15/05$	LATIN SMALL LETTER O WITH TILDE	Latin-1
000	246	15/05 $15/06$	LATIN SMALL LETTER 0 WITH DIAERESIS	Latin-1
000	247	15/00 $15/07$	DIVISION SIGN	Latin-1
000	248	15/07	LATIN SMALL LETTER o WITH OBLIQUE STROKE	Latin-1
000	249	15/08	LATIN SMALL LETTER 0 WITH OBLIQUE STROKE LATIN SMALL LETTER u WITH GRAVE ACCENT	Latin-1
000	250	15/09 $15/10$	LATIN SMALL LETTER U WITH GRAVE ACCENT LATIN SMALL LETTER U WITH ACUTE ACCENT	Latin-1
000	251	15/11	LATIN SMALL LETTER U WITH ACCITE ACCENT LATIN SMALL LETTER U WITH CIRCUMFLEX ACCENT	Latin-1
000	252	15/11 $15/12$	LATIN SMALL LETTER U WITH CIRCOMPLEX ACCENT LATIN SMALL LETTER U WITH DIAERESIS	Latin-1
000	253	15/12 $15/13$	LATIN SMALL LETTER & WITH ACUTE ACCENT	Latin-1
000	254	15/14	ICELANDIC SMALL LETTER THORN	Latin-1
000	255	15/14 $15/15$	LATIN SMALL LETTER Y WITH DIAERESIS	Latin-1
000	233	13/ 13	LATIN SMALL LETTER Y WITH DIAERESIS	Latin-1
001	161	10/01	LATIN CAPITAL LETTER A WITH OGONEK	Latin-2
001	162	10/02	BREVE	Latin-2
001	163	10/03	LATIN CAPITAL LETTER L WITH STROKE	Latin-2
001	165	10/05	LATIN CAPITAL LETTER L WITH CARON	Latin-2
001	166	10/06	LATIN CAPITAL LETTER S WITH ACUTE ACCENT	Latin-2
001	169	10/09	LATIN CAPITAL LETTER S WITH CARON	Latin-2
001	170	10/10	LATIN CAPITAL LETTER S WITH CEDILLA	Latin-2
001	171	10/11	LATIN CAPITAL LETTER T WITH CARON	Latin-2
001	172	10/12	LATIN CAPITAL LETTER Z WITH ACUTE ACCENT	Latin-2
001	174	10/14	LATIN CAPITAL LETTER Z WITH CARON	Latin-2
001	175	10/15	LATIN CAPITAL LETTER Z WITH DOT ABOVE	Latin-2
001	177	11/01	LATIN SMALL LETTER a WITH OGONEK	Latin-2
001	178	11/02	OGONEK	Latin-2
001	179	11/03	LATIN SMALL LETTER I WITH STROKE	Latin-2
001	181	11/05	LATIN SMALL LETTER I WITH CARON	Latin-2

Byte 3	Byte 4	Code Position	Name	Set
001	182	11/06	LATIN SMALL LETTER s WITH ACUTE ACCENT	Latin-2
001	183	11/07	CARON	Latin-2
001	185	11/09	LATIN SMALL LETTER s WITH CARON	Latin-2
001	186	11/10	LATIN SMALL LETTER s WITH CEDILLA	Latin-2
001	187	11/11	LATIN SMALL LETTER t WITH CARON	Latin-2
001	188	11/12	LATIN SMALL LETTER z WITH ACUTE ACCENT	Latin-2
001	189	11/13	DOUBLE ACUTE ACCENT	Latin-2
001	190	11/14	LATIN SMALL LETTER z WITH CARON	Latin-2
001	191	11/15	LATIN SMALL LETTER z WITH DOT ABOVE	Latin-2
001	192	12/00	LATIN CAPITAL LETTER R WITH ACUTE ACCENT	Latin-2
001	195	12/03	LATIN CAPITAL LETTER A WITH BREVE	Latin-2
001	197	12/05	LATIN CAPITAL LETTER L WITH ACUTE ACCENT	Latin-2
001	198	12/06	LATIN CAPITAL LETTER C WITH ACUTE ACCENT	Latin-2
001	200	12/08	LATIN CAPITAL LETTER C WITH CARON	Latin-2
001	202	12/10	LATIN CAPITAL LETTER E WITH OGONEK	Latin-2
001	204	12/12	LATIN CAPITAL LETTER E WITH CARON	Latin-2
001	207	12/15	LATIN CAPITAL LETTER D WITH CARON	Latin-2
001	208	13/00	LATIN CAPITAL LETTER D WITH STROKE	Latin-2
001	209	13/01	LATIN CAPITAL LETTER N WITH ACUTE ACCENT	Latin-2
001	210	13/01 $13/02$	LATIN CAPITAL LETTER N WITH CARON	Latin-2
001	213	13/02 $13/05$	LATIN CAPITAL LETTER O WITH DOUBLE ACUTE ACCENT	Latin-2
001	216	13/03	LATIN CAPITAL LETTER O WITH DOUBLE ACCIE ACCENT	Latin-2
	217	13/08	LATIN CAPITAL LETTER I WITH CARON LATIN CAPITAL LETTER U WITH RING ABOVE	Latin-2
	217	13/09	LATIN CAPITAL LETTER U WITH RING ABOVE LATIN CAPITAL LETTER U WITH DOUBLE ACUTE ACCENT	Latin-2
001	222	13/11		
001			LATIN CAPITAL LETTER T WITH CEDILLA	Latin-2
001	224	14/00	LATIN SMALL LETTER r WITH ACUTE ACCENT	Latin-2
001	227	14/03	LATIN SMALL LETTER A WITH BREVE	Latin-2
001	229	14/05	LATIN SMALL LETTER I WITH ACUTE ACCENT	Latin-2
001	230	14/06	LATIN SMALL LETTER c WITH ACUTE ACCENT	Latin-2
001	232	14/08	LATIN SMALL LETTER c WITH CARON	Latin-2
001	234	14/10	LATIN SMALL LETTER e WITH OGONEK	Latin-2
001	236	14/12	LATIN SMALL LETTER e WITH CARON	Latin-2
001	239	14/15	LATIN SMALL LETTER d WITH CARON	Latin-2
001	240	15/00	LATIN SMALL LETTER d WITH STROKE	Latin-2
001	241	15/01	LATIN SMALL LETTER n WITH ACUTE ACCENT	Latin-2
001	242	15/02	LATIN SMALL LETTER n WITH CARON	Latin-2
001	245	15/05	LATIN SMALL LETTER o WITH DOUBLE ACUTE ACCENT	Latin-2
001	248	15/08	LATIN SMALL LETTER r WITH CARON	Latin-2
001		15/09	LATIN SMALL LETTER u WITH RING ABOVE	Latin-2
001	251	15/11	LATIN SMALL LETTER u WITH DOUBLE ACUTE ACCENT	Latin-2
001	254	15/14	LATIN SMALL LETTER t WITH CEDILLA	Latin-2
001	255	15/15	DOT ABOVE	Latin-2
002	161	10/01	LATIN CAPITAL LETTER H WITH STROKE	Latin-3
002	166	10/06	LATIN CAPITAL LETTER H WITH CIRCUMFLEX ACCENT	Latin-3
002	169	10/09	LATIN CAPITAL LETTER I WITH DOT ABOVE	Latin-3
002	171	10/03	LATIN CAPITAL LETTER G WITH BREVE	Latin-3
002	172	10/11 $10/12$	LATIN CAPITAL LETTER J WITH CIRCUMFLEX ACCENT	Latin-3
002	177	11/01	LATIN SMALL LETTER I WITH STROKE	Latin-3
002 002	182	11/01	LATIN SMALL LETTER IN WITH STROKE LATIN SMALL LETTER IN WITH CIRCUMFLEX ACCENT	
uuz.	104	11/00	LATIN SWALL LETTER II WITH CIRCUMFLEX ACCENT	Latin-3

Rute 9	Rute 4	Code Position	Name	Set
	•			
002	187	11/11	LATIN SMALL LETTER g WITH BREVE	Latin-3
002	188	11/12	LATIN SMALL LETTER J WITH CIRCUMFLEX ACCENT	Latin-3
002	197	12/05	LATIN CAPITAL LETTER C WITH DOT ABOVE	Latin-3
002	198	12/06	LATIN CAPITAL LETTER C WITH CIRCUMFLEX ACCENT	Latin-3
002	213	13/05	LATIN CAPITAL LETTER G WITH DOT ABOVE	Latin-3
002	216	13/08	LATIN CAPITAL LETTER G WITH CIRCUMFLEX ACCENT	Latin-3
002	221	13/13	LATIN CAPITAL LETTER U WITH BREVE	Latin-3
002	222	13/14	LATIN CAPITAL LETTER S WITH CIRCUMFLEX ACCENT	Latin-3
002	229	14/05	LATIN SMALL LETTER c WITH DOT ABOVE	Latin-3
002	230	14/06	LATIN SMALL LETTER c WITH CIRCUMFLEX ACCENT	Latin-3
002	245	15/05	LATIN SMALL LETTER g WITH DOT ABOVE	Latin-3
002	248	15/08	LATIN SMALL LETTER g WITH CIRCUMFLEX ACCENT	Latin-3
002	253	15/13	LATIN SMALL LETTER u WITH BREVE	Latin-3
002	254	15/14	LATIN SMALL LETTER'S WITH CIRCUMFLEX ACCENT	Latin-3
003	162	10/02	SMALL GREENLANDIC LETTER KRA	Latin-4
003	163	10/03	LATIN CAPITAL LETTER R WITH CEDILLA	Latin-4
003	165	10/05	LATIN CAPITAL LETTER I WITH TILDE	Latin-4
003	166	10/06	LATIN CAPITAL LETTER L WITH CEDILLA	Latin-4
003	170	10/10	LATIN CAPITAL LETTER E WITH MACRON	Latin-4
003	171	10/11	LATIN CAPITAL LETTER G WITH CEDILLA	Latin-4
003	172	10/12	LATIN CAPITAL LETTER T WITH OBLIQUE STROKE	Latin-4
003	179	11/03	LATIN SMALL LETTER r WITH CEDILLA	Latin-4
003	181	11/05	LATIN SMALL LETTER i WITH TILDE	Latin-4
003	182	11/06	LATIN SMALL LETTER I WITH CEDILLA	Latin-4
003	186	11/10	LATIN SMALL LETTER e WITH MACRON	Latin-4
003	187	11/11	LATIN SMALL LETTER g WITH CEDILLA ABOVE	Latin-4
003	188	11/12	LATIN SMALL LETTER t WITH OBLIQUE STROKE	Latin-4
003	189	11/13	LAPPISH CAPITAL LETTER ENG	Latin-4
003	191	11/15	LAPPISH SMALL LETTER ENG	Latin-4
003	192	12/00	LATIN CAPITAL LETTER A WITH MACRON	Latin-4
003	199	$\frac{12}{00}$	LATIN CAPITAL LETTER I WITH OGONEK	Latin-4
003	204	$\frac{12}{07}$	LATIN CAPITAL LETTER F WITH OGONER LATIN CAPITAL LETTER E WITH DOT ABOVE	
003 003	207	$\frac{12}{12}$	LATIN CAPITAL LETTER E WITH DOT ABOVE LATIN CAPITAL LETTER I WITH MACRON	Latin-4
003	209	13/01	LATIN CAPITAL LETTER O WITH CEDILLA	Latin-4
003	210	13/02	LATIN CAPITAL LETTER O WITH MACRON	Latin-4
003	211	13/03	LATIN CAPITAL LETTER K WITH CEDILLA	Latin-4
003	217	13/09	LATIN CAPITAL LETTER U WITH OGONEK	Latin-4
003	221	13/13	LATIN CAPITAL LETTER U WITH TILDE	Latin-4
003	222	13/14	LATIN CAPITAL LETTER U WITH MACRON	Latin-4
003	224	14/00	LATIN SMALL LETTER a WITH MACRON	Latin-4
003	231	14/07	LATIN SMALL LETTER i WITH OGONEK	Latin-4
003	236	14/12	LATIN SMALL LETTER e WITH DOT ABOVE	Latin-4
003	239	14/15	LATIN SMALL LETTER i WITH MACRON	Latin-4
003	241	15/01	LATIN SMALL LETTER n WITH CEDILLA	Latin-4
003	242	15/02	LATIN SMALL LETTER o WITH MACRON	Latin-4
003	243	15/03	LATIN SMALL LETTER k WITH CEDILLA	Latin-4
003	249	15/09	LATIN SMALL LETTER u WITH OGONEK	Latin-4
003	253	15/13	LATIN SMALL LETTER u WITH TILDE	Latin-4
		15/14	LATIN SMALL LETTER u WITH MACRON	Latin-4
003	254	13/14	LI III I DIVII ILL LLI ILICU VIIII IVII ICICOI I	Laun-

Byte 3	Byte 4	Code Position	Name	Set
004	126	07/14	OVERLINE	Kana
004	161	10/01	KANA FULL STOP	Kana
004	162	10/02	KANA OPENING BRACKET	Kana
004	163	10/03	KANA CLOSING BRACKET	Kana
004	164	10/04	KANA COMMA	Kana
004	165	10/05	KANA CONJUNCTIVE	Kana
004	166	10/06	KANA LETTER WO	Kana
004	167	10/07	KANA LETTER SMALL A	Kana
004	168	10/08	KANA LETTER SMALL I	Kana
004	169	10/09	KANA LETTER SMALL U	Kana
004	170	10/10	KANA LETTER SMALL E	Kana
004	171	10/11	KANA LETTER SMALL O	Kana
004	172	10/12	KANA LETTER SMALL YA	Kana
004	173	10/13	KANA LETTER SMALL YU	Kana
004	174	10/14	KANA LETTER SMALL YO	Kana
004	175	10/15	KANA LETTER SMALL TSU	Kana
004	176	11/00	PROLONGED SOUND SYMBOL	Kana
004	177	11/01	KANA LETTER A	Kana
004	178	11/01	KANA LETTER I	Kana
	179	11/02 $11/03$	KANA LETTER U	Kana
004 004	180			
004 004	181	11/04 11/05	KANA LETTER C	Kana
			KANA LETTER O	Kana
004	182	11/06	KANA LETTER KA	Kana
004	183	11/07	KANA LETTER KI	Kana
004	184	11/08	KANA LETTER KU	Kana
004	185	11/09	KANA LETTER KE	Kana
004	186	11/10	KANA LETTER KO	Kana
004	187	11/11	KANA LETTER SA	Kana
004	188	11/12	KANA LETTER SHI	Kana
004	189	11/13	KANA LETTER SU	Kana
004	190	11/14	KANA LETTER SE	Kana
004	191	11/15	KANA LETTER SO	Kana
004	192	12/00	KANA LETTER TA	Kana
004	193	12/01	KANA LETTER CHI	Kana
004	194	12/02	KANA LETTER TSU	Kana
004	195	12/03	KANA LETTER TE	Kana
004	196	12/04	KANA LETTER TO	Kana
004	197	12/05	KANA LETTER NA	Kana
004	198	12/06	KANA LETTER NI	Kana
004	199	12/07	KANA LETTER NU	Kana
004	200	12/08	KANA LETTER NE	Kana
004	201	12/09	KANA LETTER NO	Kana
004	202	12/10	KANA LETTER HA	Kana
004	203	12/11	KANA LETTER HI	Kana
004	204	12/12	KANA LETTER FU	Kana
004	205	12/13	KANA LETTER HE	Kana
004	206	12/14	KANA LETTER HO	Kana
004	207	12/15	KANA LETTER MA	Kana
004	208	13/00	KANA LETTER MI	Kana
004	209	13/01	KANA LETTER MU	Kana
004	210	13/02	KANA LETTER ME	Kana
004	211	13/02 $13/03$	KANA LETTER MO	Kana

		Code		
Byte 3	Byte 4	Position	Name	Set
004	212	13/04	KANA LETTER YA	Kana
004	213	13/05	KANA LETTER YU	Kana
004	214	13/06	KANA LETTER YO	Kana
004	215	13/07	KANA LETTER RA	Kana
004	216	13/08	KANA LETTER RI	Kana
004	217	13/09	KANA LETTER RU	Kana
004	218	13/10	KANA LETTER RE	Kana
004	219	13/11	KANA LETTER RO	Kana
004	220	13/12	KANA LETTER WA	Kana
004	221	13/13	KANA LETTER N	Kana
004	222	13/14	VOICED SOUND SYMBOL	Kana
004	223	13/15	SEMIVOICED SOUND SYMBOL	Kana
005	172	10/12	ARABIC COMMA	Arabic
005	187	11/11	ARABIC SEMICOLON	Arabic
005	191	11/11	ARABIC QUESTION MARK	Arabic
005	193	12/01	ARABIC LETTER HAMZA	Arabic
005	194	$\frac{12}{01}$	ARABIC LETTER MADDA ON ALEF	Arabic
005	195	$\frac{12}{02}$	ARABIC LETTER HAMZA ON ALEF	Arabic
005	196	12/03	ARABIC LETTER HAMZA ON WAW	Arabic
005	197	$\frac{12}{04}$	ARABIC LETTER HAMZA ON WAW ARABIC LETTER HAMZA UNDER ALEF	Arabic
005	198	$\frac{12}{05}$	ARABIC LETTER HAMZA ON YEH	Arabic
005	199	$\frac{12}{00}$	ARABIC LETTER ALEF	Arabic
005 005	200	$\frac{12}{07}$	ARABIC LETTER ALEF	Arabic
005 005	201	$\frac{12}{08}$	ARABIC LETTER BETT ARABIC LETTER TEH MARBUTA	Arabic
005 005	202	$\frac{12}{09}$	ARABIC LETTER TEH MARBUTA	Arabic
005	203	$\frac{12}{10}$	ARABIC LETTER TEIT ARABIC LETTER THEH	Arabic
005 005	204	$\frac{12}{11}$	ARABIC LETTER THEIT ARABIC LETTER JEEM	Arabic
005 005	205	$\frac{12}{12}$	ARABIC LETTER JEEW ARABIC LETTER HAH	Arabic
	206	$\frac{12}{13}$	ARABIC LETTER KHAH	
005 005	207	$\frac{12}{14}$ $\frac{12}{15}$	ARABIC LETTER DAL	Arabic Arabic
	208			
005		13/00	ARABIC LETTER THAL	Arabic
005	209	13/01	ARABIC LETTER RA	Arabic
005	210	13/02	ARABIC LETTER ZAIN	Arabic
005	211	13/03	ARABIC LETTER SEEN	Arabic
005	212	13/04	ARABIC LETTER SHEEN	Arabic
005	213	13/05	ARABIC LETTER SAD	Arabic
005	214	13/06	ARABIC LETTER DAD	Arabic
005	215	13/07	ARABIC LETTER TAH	Arabic
005	216	13/08	ARABIC LETTER ZAH	Arabic
005	217	13/09	ARABIC LETTER AIN	Arabic
005	218	13/10	ARABIC LETTER GHAIN	Arabic
005	224	14/00	ARABIC LETTER TATWEEL	Arabic
005	225	14/01	ARABIC LETTER FEH	Arabic
005	226	14/02	ARABIC LETTER QAF	Arabic
005	227	14/03	ARABIC LETTER KAF	Arabic
005	228	14/04	ARABIC LETTER LAM	Arabic
005	229	14/05	ARABIC LETTER MEEM	Arabic
005	230	14/06	ARABIC LETTER NOON	Arabic
005	231	14/07	ARABIC LETTER HA	Arabic
005	232	14/08	ARABIC LETTER WAW	Arabic

Byte 3	Byte 4	Code Position	Name	Set
005	233	14/09	ARABIC LETTER ALEF MAKSURA	Arabic
005	234	14/10	ARABIC LETTER YEH	Arabic
005	235	14/11	ARABIC LETTER FATHATAN	Arabic
005	236	14/11	ARABIC LETTER DAMMATAN	Arabic
005	237	14/13	ARABIC LETTER KASRATAN	Arabic
005 005	238	14/13	ARABIC LETTER FATHA	Arabic
005 005	239	14/14	ARABIC LETTER DAMMA	Arabic
005 005	240	15/00	ARABIC LETTER KASRA	Arabic
	241	15/00		
005			ARABIC LETTER SHADDA ARABIC LETTER SUKUN	Arabic
005	242	15/02	ARADIC LETTER SURUN	Arabic
006	161	10/01	SERBOCROATION CYRILLIC SMALL LETTER DJE	Cyrillic
006	162	10/02	MACEDONIAN CYRILLIC SMALL LETTER GJE	Cyrillic
006	163	10/03	CYRILLIC SMALL LETTER IO	Cyrillic
006	164	10/04	UKRAINIAN CYRILLIC SMALL LETTER IE	Cyrillic
006	165	10/05	MACEDONIAN SMALL LETTER DSE	Cyrillic
006	166	10/06	BYELORUSSIAN/UKRAINIAN CYRILLIC SMALL LETTER I	Cyrillic
006	167	10/07	UKRAINIAN SMALL LETTER YI	Cyrillic
006	168	10/08	CYRILLIC SMALL LETTER JE	Cyrillic
006	169	10/09	CYRILLIC SMALL LETTER LJE	Cyrillic
006	170	10/10	CYRILLIC SMALL LETTER NJE	Cyrillic
006	171	10/11	SERBIAN SMALL LETTER TSHE	Cyrillic
006	172	10/12	MACEDONIAN CYRILLIC SMALL LETTER KJE	Cyrillic
006	174	10/14	BYELORUSSIAN SMALL LETTER SHORT U	Cyrillic
006	175	10/15	CYRILLIC SMALL LETTER DZHE	Cyrillic
006	176	11/00	NUMERO SIGN	Cyrillic
006	177	11/01	SERBOCROATIAN CYRILLIC CAPITAL LETTER DJE	Cyrillic
006	178	11/02	MACEDONIAN CYRILLIC CAPITAL LETTER GJE	Cyrillic
006	179	11/03	CYRILLIC CAPITAL LETTER IO	Cyrillic
006	180	11/04	UKRAINIAN CYRILLIC CAPITAL LETTER IE	Cyrillic
006	181	11/05	MACEDONIAN CAPITAL LETTER DSE	Cyrillic
006	182	11/06	BYELORUSSIAN/UKRAINIAN CYRILLIC CAPITAL LETTER I	Cyrillic
006	183	11/07	UKRAINIAN CAPITAL LETTER YI	Cyrillic
006	184	11/07	CYRILLIC CAPITAL LETTER JE	Cyrillic
006	185	11/09	CYRILLIC CAPITAL LETTER LJE	Cyrillic
006	186	11/09	CYRILLIC CAPITAL LETTER NJE	Cyrillic
006	187	11/11	SERBIAN CAPITAL LETTER TSHE	Cyrillic
006	188	11/11	MACEDONIAN CYRILLIC CAPITAL LETTER KJE	Cyrillic
006	190	11/14	BYELORUSSIAN CAPITAL LETTER SHORT U	Cyrillic
006	191	11/14	CYRILLIC CAPITAL LETTER DZHE	Cyrillic
006	192	12/00	CYRILLIC SMALL LETTER YU	Cyrillic
006	193	12/00	CYRILLIC SMALL LETTER A	Cyrillic
006	193	$\frac{12}{01}$	CYRILLIC SMALL LETTER BE	Cyrillic
006	195	12/03	CYRILLIC SMALL LETTER TSE	Cyrillic
006	196	12/04	CYPILLIC SMALL LETTER DE	Cyrillic
006	197	12/05	CYPILLIC SMALL LETTER IE	Cyrillic
006	198	12/06	CYRILLIC SMALL LETTER EF	Cyrillic
006	199	12/07	CYRILLIC SMALL LETTER GHE	Cyrillic
006	200	12/08	CYRILLIC SMALL LETTER HA	Cyrillic
006	201	12/09	CYRILLIC SMALL LETTER I	Cyrillic
006	202	12/10	CYRILLIC SMALL LETTER SHORT I	Cyrillic

		Code		
Byte 3	Byte 4	Position	Name	Set
006	203	12/11	CYRILLIC SMALL LETTER KA	Cyrillic
006	204	12/12	CYRILLIC SMALL LETTER EL	Cyrillic
006	205	12/13	CYRILLIC SMALL LETTER EM	Cyrillic
006	206	12/14	CYRILLIC SMALL LETTER EN	Cyrillic
006	207	12/15	CYRILLIC SMALL LETTER O	Cyrillic
006	208	13/00	CYRILLIC SMALL LETTER PE	Cyrillic
006	209	13/01	CYRILLIC SMALL LETTER YA	Cyrillic
006	210	13/02	CYRILLIC SMALL LETTER ER	Cyrillic
006	211	13/03	CYRILLIC SMALL LETTER ES	Cyrillic
006	212	13/04	CYRILLIC SMALL LETTER TE	Cyrillic
006	213	13/05	CYRILLIC SMALL LETTER U	Cyrillic
006	214	13/06	CYRILLIC SMALL LETTER ZHE	Cyrillic
006	215	13/07	CYRILLIC SMALL LETTER VE	Cyrillic
006	216	13/08	CYRILLIC SMALL SOFT SIGN	Cyrillic
006	217	13/09	CYRILLIC SMALL LETTER YERU	Cyrillic
006	218	13/10	CYRILLIC SMALL LETTER ZE	Cyrillic
006	219	13/11	CYRILLIC SMALL LETTER SHA	Cyrillic
006	220	13/12	CYRILLIC SMALL LETTER E	Cyrillic
006	221	13/13	CYRILLIC SMALL LETTER SHCHA	Cyrillic
006	222	13/14	CYRILLIC SMALL LETTER CHE	Cyrillic
006	223	13/14	CYRILLIC SMALL HARD SIGN	Cyrillic
006	224	14/00	CYRILLIC SMALL HARD SIGN CYRILLIC CAPITAL LETTER YU	Cyrillic
006	225	14/00		
			CYRILLIC CAPITAL LETTER A	Cyrillic
006	226 227	14/02	CYPILLIC CAPITAL LETTER BE	Cyrillic
006		14/03	CYPILLIC CAPITAL LETTER TSE	Cyrillic
006	228	14/04	CYPILLIC CAPITAL LETTER DE	Cyrillic
006	229	14/05	CYPILLIC CAPITAL LETTER IE	Cyrillic
006	230	14/06	CYRILLIC CAPITAL LETTER EF	Cyrillic
006	231	14/07	CYRILLIC CAPITAL LETTER GHE	Cyrillic
006	232	14/08	CYRILLIC CAPITAL LETTER HA	Cyrillic
006	233	14/09	CYRILLIC CAPITAL LETTER I	Cyrillic
006	234	14/10	CYRILLIC CAPITAL LETTER SHORT I	Cyrillic
006	235	14/11	CYRILLIC CAPITAL LETTER KA	Cyrillic
006	236	14/12	CYRILLIC CAPITAL LETTER EL	Cyrillic
006	237	14/13	CYRILLIC CAPITAL LETTER EM	Cyrillic
006	238	14/14	CYRILLIC CAPITAL LETTER EN	Cyrillic
006	239	14/15	CYRILLIC CAPITAL LETTER O	Cyrillic
006	240	15/00	CYRILLIC CAPITAL LETTER PE	Cyrillic
006	241	15/01	CYRILLIC CAPITAL LETTER YA	Cyrillic
006	242	15/02	CYRILLIC CAPITAL LETTER ER	Cyrillic
006	243	15/03	CYRILLIC CAPITAL LETTER ES	Cyrillic
006	244	15/04	CYRILLIC CAPITAL LETTER TE	Cyrillic
006	245	15/05	CYRILLIC CAPITAL LETTER U	Cyrillic
006	246	15/06	CYRILLIC CAPITAL LETTER ZHE	Cyrillic
006	247	15/07	CYRILLIC CAPITAL LETTER VE	Cyrillic
006	248	15/08	CYRILLIC CAPITAL SOFT SIGN	Cyrillic
006	249	15/09	CYRILLIC CAPITAL LETTER YERU	Cyrillic
006	250	15/10	CYRILLIC CAPITAL LETTER ZE	Cyrillic
006	251	15/11	CYRILLIC CAPITAL LETTER SHA	Cyrillic
006	252	15/12	CYRILLIC CAPITAL LETTER E	Cyrillic
006	253	15/13	CYRILLIC CAPITAL LETTER SHCHA	Cyrillic
006	254	15/14	CYRILLIC CAPITAL LETTER CHE	Cyrillic

Byte 3	Byte 4	Code Position	Name	Set
006	255	15/15	CYRILLIC CAPITAL HARD SIGN	Cyrillic
007	161	10/01	GREEK CAPITAL LETTER ALPHA WITH ACCENT	Greek
	162	10/02	GREEK CAPITAL LETTER EPSILON WITH ACCENT	Greek
007	163	10/02	GREEK CAPITAL LETTER ETA WITH ACCENT	Greek
	164	10/03	GREEK CAPITAL LETTER IOTA WITH ACCENT	Greek
	165	10/04	GREEK CAPITAL LETTER IOTA WITH ACCENT	Greek
	167	10/03	GREEK CAPITAL LETTER IOTA WITH DIAERESIS GREEK CAPITAL LETTER OMICRON WITH ACCENT	Greek
	168	10/07	GREEK CAPITAL LETTER OMICKON WITH ACCENT	Greek
	169	10/08	GREEK CAPITAL LETTER UPSILON WITH ACCENT	Greek
	171	10/09	GREEK CAPITAL LETTER OPSILON WITH DIAERESIS GREEK CAPITAL LETTER OMEGA WITH ACCENT	Greek
	174	10/11		
	174	10/14 $10/15$	DIAERESIS AND ACCENT	Greek
			HORIZONTAL BAR	Greek
	177	11/01	GREEK SMALL LETTER ALPHA WITH ACCENT	Greek
	178	11/02	GREEK SMALL LETTER EPSILON WITH ACCENT	Greek
	179	11/03	GREEK SMALL LETTER ETA WITH ACCENT	Greek
	180	11/04	GREEK SMALL LETTER IOTA WITH ACCENT	Greek
	181	11/05	GREEK SMALL LETTER IOTA WITH DIAERESIS	Greek
	182	11/06	GREEK SMALL LETTER IOTA WITH ACCENT+DIAERESIS	Greek
	183	11/07	GREEK SMALL LETTER OMICRON WITH ACCENT	Greek
	184	11/08	GREEK SMALL LETTER UPSILON WITH ACCENT	Greek
	185	11/09	GREEK SMALL LETTER UPSILON WITH DIAERESIS	Greek
	186	11/10	GREEK SMALL LETTER UPSILON WITH ACCENT+DIAERESIS	Greek
	187	11/11	GREEK SMALL LETTER OMEGA WITH ACCENT	Greek
	193	12/01	GREEK CAPITAL LETTER ALPHA	Greek
	194	12/02	GREEK CAPITAL LETTER BETA	Greek
	195	12/03	GREEK CAPITAL LETTER GAMMA	Greek
	196	12/04	GREEK CAPITAL LETTER DELTA	Greek
	197	12/05	GREEK CAPITAL LETTER EPSILON	Greek
	198	12/06	GREEK CAPITAL LETTER ZETA	Greek
007	199	12/07	GREEK CAPITAL LETTER ETA	Greek
007	200	12/08	GREEK CAPITAL LETTER THETA	Greek
007	201	12/09	GREEK CAPITAL LETTER IOTA	Greek
007	202	12/10	GREEK CAPITAL LETTER KAPPA	Greek
007	203	12/11	GREEK CAPITAL LETTER LAMDA	Greek
	204	12/12	GREEK CAPITAL LETTER MU	Greek
007	205	12/13	GREEK CAPITAL LETTER NU	Greek
	206	12/14	GREEK CAPITAL LETTER XI	Greek
	207	12/15	GREEK CAPITAL LETTER OMICRON	Greek
	208	13/00	GREEK CAPITAL LETTER PI	Greek
	209	13/01	GREEK CAPITAL LETTER RHO	Greek
	210	13/02	GREEK CAPITAL LETTER SIGMA	Greek
	212	13/04	GREEK CAPITAL LETTER TAU	Greek
	213	13/05	GREEK CAPITAL LETTER UPSILON	Greek
	214	13/06	GREEK CAPITAL LETTER PHI	Greek
	215	13/07	GREEK CAPITAL LETTER CHI	Greek
	216	13/07	GREEK CAPITAL LETTER PSI	Greek
I	217	13/08	GREEK CAPITAL LETTER OMEGA	Greek
VU1		14/01	GREEK SMALL LETTER ALPHA	Greek
007				
	225 226	14/01 $14/02$	GREEK SMALL LETTER BETA	Greek

Byte 3	Byte 4	Code Position	Name	Set
007	228	14/04	GREEK SMALL LETTER DELTA	Greek
007	229	14/05	GREEK SMALL LETTER EPSILON	Greek
007	230	14/06	GREEK SMALL LETTER ZETA	Greek
007	231	14/07	GREEK SMALL LETTER ETA	Greek
007	232	14/08	GREEK SMALL LETTER THETA	Greek
007	233	14/09	GREEK SMALL LETTER IOTA	Greek
007	234	14/10	GREEK SMALL LETTER KAPPA	Greek
007	235	14/11	GREEK SMALL LETTER LAMDA	Greek
007	236	14/12	GREEK SMALL LETTER MU	Greek
007	237	14/13	GREEK SMALL LETTER NU	Greek
007	238	14/14	GREEK SMALL LETTER XI	Greek
007	239	14/15	GREEK SMALL LETTER OMICRON	Greek
007	240	15/00	GREEK SMALL LETTER PI	Greek
007	241	15/01	GREEK SMALL LETTER RHO	Greek
007	242	15/02	GREEK SMALL LETTER SIGMA	Greek
007	243	15/03	GREEK SMALL LETTER FINAL SMALL SIGMA	Greek
007	244	15/03	GREEK SMALL LETTER TAU	Greek
007	245	15/04 $15/05$	GREEK SMALL LETTER UPSILON	Greek
007	246	15/05 $15/06$	GREEK SMALL LETTER PHI	Greek
007	247	15/00 $15/07$	GREEK SMALL LETTER CHI	Greek
007 007	248	15/07		Greek
007 007	248	15/08	GREEK SMALL LETTER PSI GREEK SMALL LETTER OMEGA	Greek
008	161	10/01	LEFT RADICAL	Technica
008	162	10/02	TOP LEFT RADICAL	Technica
008	163	10/03	HORIZONTAL CONNECTOR	Technica
008	164	10/04	TOP INTEGRAL	Technica
008	165	10/05	BOTTOM INTEGRAL	Technica
008	166	10/06	VERTICAL CONNECTOR	Technica
008	167	10/07	TOP LEFT SQUARE BRACKET	Technica
008	168	10/08	BOTTOM LEFT SQUARE BRACKET	Technica
008	169	10/09	TOP RIGHT SQUARE BRACKET	Technica
008	170	10/03	BOTTOM RIGHT SQUARE BRACKET	Technica
008	171	10/10	TOP LEFT PARENTHESIS	Technica
008	172	10/11 $10/12$	BOTTOM LEFT PARENTHESIS	Technica
008	172	10/12	TOP RIGHT PARENTHESIS	Technica
008	173	10/13	BOTTOM RIGHT PARENTHESIS	Technica
			LEFT MIDDLE CURLY BRACE	
800	175	10/15		Technica
800	176	11/00	RIGHT MIDDLE CURLY BRACE TOP LEFT SUMMATION	Technica
800	177	11/01		Technica
800	178	11/02	BOTTOM LEFT SUMMATION	Technica
800	179	11/03	TOP VERTICAL SUMMATION CONNECTOR	Technica
800	180	11/04	BOTTOM VERTICAL SUMMATION CONNECTOR	Technica
800	181	11/05	TOP RIGHT SUMMATION	Technica
800	182	11/06	BOTTOM RIGHT SUMMATION	Technica
800	183	11/07	RIGHT MIDDLE SUMMATION	Technica
800	188	11/12	LESS THAN OR EQUAL SIGN	Technica
800	189	11/13	NOT EQUAL SIGN	Technica
800	190	11/14	GREATER THAN OR EQUAL SIGN	Technica
800	191	11/15	INTEGRAL	Technica
800	192	12/00	THEREFORE	Technica

		Code		
Byte 3	Byte 4	Position	Name	Set
008	193	12/01	VARIATION, PROPORTIONAL TO	Technical
800	194	12/02	INFINITY	Technical
800	197	12/05	NABLA, DEL	Technical
800	200	12/08	IS APPROXIMATE TO	Technical
800	201	12/09	SIMILAR OR EQUAL TO	Technical
800	205	12/13	IF AND ONLY IF	Technical
800	206	12/14	IMPLIES	Technical
800	207	12/15	IDENTICAL TO	Technical
800	214	13/06	RADICAL	Technical
800	218	13/10	IS INCLUDED IN	Technical
800	219	13/11	INCLUDES	Technical
800	220	13/12	INTERSECTION	Technical
800	221	13/13	UNION	Technical
800	222	13/14	LOGICAL AND	Technical
800	223	13/15	LOGICAL OR	Technical
800	239	14/15	PARTIAL DERIVATIVE	Technical
800	246	15/06	FUNCTION	Technical
800	251	15/11	LEFT ARROW	Technical
800	252	15/12	UPWARD ARROW	Technical
800	253	15/13	RIGHT ARROW	Technical
800	254	15/14	DOWNWARD ARROW	Technical
009	223	13/15	BLANK	Special
	224			
009		14/00	SOLID DIAMOND	Special
009	225 226	14/01	CHECKERBOARD	Special
009 009	227	14/02 $14/03$	"HT" "FF"	Special Special
009	228	14/03	"CR"	Special
009	229	14/04 $14/05$	"LF"	Special
009	232	14/03 $14/08$	"NL"	Special
009	233	14/08	"VT"	Special
009	234	14/03 $14/10$	LOWER-RIGHT CORNER	Special
009	235	14/11	UPPER-RIGHT CORNER	Special
009	236	14/11 $14/12$	UPPER-LEFT CORNER	Special
009	237	14/12	LOWER-LEFT CORNER	Special
009	238	14/13	CROSSING-LINES	Special
009	239	14/15	HORIZONTAL LINE, SCAN 1	
009	240	14/13 $15/00$	HORIZONTAL LINE, SCAN 1 HORIZONTAL LINE, SCAN 3	Special
009	241	15/00 $15/01$	HORIZONTAL LINE, SCAN 5	Special Special
009	242	15/01 $15/02$	HORIZONTAL LINE, SCAN 7	Special
009	243	15/02 $15/03$	HORIZONTAL LINE, SCAN 7 HORIZONTAL LINE, SCAN 9	Special
009	244	15/03 $15/04$	LEFT "T"	Special
009	245	15/04 $15/05$	RIGHT "T"	Special
009 009	246	15/05	BOTTOM "T"	Special
009 009	247	15/00 $15/07$	TOP "T"	Special
009	248	15/08	VERTICAL BAR	Special
010	161	10/01	EM SPACE	Publish
010	162	10/02	EN SPACE	Publish
010	163	10/03	3/EM SPACE	Publish

D-4- 0	D-4- 4	Code	N	G-4
Byte 3	•	Position	Name	Set
010	164	10/04	4/EM SPACE	Publish
010	165	10/05	DIGIT SPACE	Publish
010	166	10/06	PUNCTUATION SPACE	Publish
010	167	10/07	THIN SPACE	Publish
010	168	10/08	HAIR SPACE	Publish
010	169	10/09	EM DASH	Publish
010	170	10/10	EN DASH	Publish
010	172	10/12	SIGNIFICANT BLANK SYMBOL	Publish
010	174	10/14	ELLIPSIS	Publish
010	175	10/15	DOUBLE BASELINE DOT	Publish
010	176	11/00	VULGAR FRACTION ONE THIRD	Publish
010	177	11/01	VULGAR FRACTION TWO THIRDS	Publish
010	178	11/02	VULGAR FRACTION ONE FIFTH	Publish
010	179	11/03	VULGAR FRACTION TWO FIFTHS	Publish
010	180	11/04	VULGAR FRACTION THREE FIFTHS	Publish
010	181	11/05	VULGAR FRACTION FOUR FIFTHS	Publish
010	182	11/06	VULGAR FRACTION ONE SIXTH	Publish
010	183	11/07	VULGAR FRACTION FIVE SIXTHS	Publish
010	184	11/08	CARE OF	Publish
010	187	11/11	FIGURE DASH	Publish
010	188	11/12	LEFT ANGLE BRACKET	Publish
010	189	11/13	DECIMAL POINT	Publish
010	190	11/14	RIGHT ANGLE BRACKET	Publish
010	191	11/15	MARKER	Publish
010	195	12/03	VULGAR FRACTION ONE EIGHTH	Publish
010	196	12/04	VULGAR FRACTION THREE EIGHTHS	Publish
010	197	12/05	VULGAR FRACTION FIVE EIGHTHS	Publish
010	198	12/06	VULGAR FRACTION SEVEN EIGHTHS	Publish
010	201	12/09	TRADEMARK SIGN	Publish
010	202	12/10	SIGNATURE MARK	Publish
010	203	12/11	TRADEMARK SIGN IN CIRCLE	Publish
010	204	12/12	LEFT OPEN TRIANGLE	Publish
010	205	12/13	RIGHT OPEN TRIANGLE	Publish
010	206	12/14	EM OPEN CIRCLE	Publish
010	207	$\frac{12}{15}$	EM OPEN RECTANGLE	Publish
010	208	13/00	LEFT SINGLE QUOTATION MARK	Publish
010	209	13/01	RIGHT SINGLE QUOTATION MARK	Publish
010	210	13/02	LEFT DOUBLE QUOTATION MARK	Publish
010	211	13/02	RIGHT DOUBLE QUOTATION MARK	Publish
010	212	13/03	PRESCRIPTION, TAKE, RECIPE	Publish
010	214	13/04	MINUTES	Publish
010	214	13/00	SECONDS	Publish
			LATIN CROSS	
010	217	13/09		Publish
010	218	13/10	HEXAGRAM	Publish
010	219	13/11	FILLED RECTANGLE BULLET	Publish
010	220	13/12	FILLED LEFT TRIANGLE BULLET	Publish
010	221	13/13	FILLED RIGHT TRIANGLE BULLET	Publish
010	222	13/14	EM FILLED CIRCLE	Publish
010	223	13/15	EM FILLED RECTANGLE	Publish
010	224	14/00	EN OPEN CIRCLE BULLET	Publish
010	225	14/01	EN OPEN SQUARE BULLET	Publish
010	226	14/02	OPEN RECTANGULAR BULLET	Publish

		Code		
Byte 3	Byte 4	Position	Name	Set
010	227	14/03	OPEN TRIANGULAR BULLET UP	Publish
010	228	14/04	OPEN TRIANGULAR BULLET DOWN	Publish
010	229	14/05	OPEN STAR	Publish
010	230	14/06	EN FILLED CIRCLE BULLET	Publish
010	231	14/07	EN FILLED SQUARE BULLET	Publish
010	232	14/08	FILLED TRIANGULAR BULLET UP	Publish
010	233	14/09	FILLED TRIANGULAR BULLET DOWN	Publish
010	234	14/10	LEFT POINTER	Publish
010	235	14/11	RIGHT POINTER	Publish
010	236	14/12	CLUB	Publish
010	237	14/13	DIAMOND	Publish
010	238	14/14	HEART	Publish
010	240	15/00	MALTESE CROSS	Publish
010	241	15/01	DAGGER	Publish
010	242	15/02	DOUBLE DAGGER	Publish
010	243	15/02	CHECK MARK, TICK	Publish
010	244	15/04	BALLOT CROSS	Publish
010	245	15/04 $15/05$	MUSICAL SHARP	Publish
010	246	15/05 $15/06$	MUSICAL FLAT	Publish
010	247	15/00 $15/07$	MALE SYMBOL	Publish
	248			Publish
010		15/08	FEMALE SYMBOL	
010	249	15/09	TELEPHONE SYMBOL	Publish
010	250	15/10	TELEPHONE RECORDER SYMBOL	Publish
010	251	15/11	PHONOGRAPH COPYRIGHT SIGN	Publish
010	252	15/12	CARET	Publish
010	253	15/13	SINGLE LOW QUOTATION MARK	Publish
010	254	15/14	DOUBLE LOW QUOTATION MARK	Publish
010	255	15/15	CURSOR	Publish
011	163	10/03	LEFT CARET	APL
011	166	10/06	RIGHT CARET	APL
011	168	10/08	DOWN CARET	APL
011	169	10/09	UP CARET	APL
011	192	12/00	OVERBAR	APL
011	194	12/02	DOWN TACK	APL
011	195	12/03	UP SHOE (CAP)	APL
011	196	12/04	DOWN STILE	APL
011	198	12/04 $12/06$	UNDERBAR	APL
011	202	$\frac{12}{00}$	JOT	APL
011	204	12/12	QUAD	APL
011	206	$\frac{12}{12}$	UP TACK	APL
011	207	$\frac{12}{14}$	CIRCLE	APL
				APL
011	211	13/03	UP STILE	APL
011	214	13/06	DOWN SHOE (CUP)	
011	216	13/08	RIGHT SHOE	APL
011	218	$\frac{13}{10}$	LEFT SHOE	APL
011	220	13/12	LEFT TACK	APL
011	252	15/12	RIGHT TACK	APL
012	223	13/15	DOUBLE LOW LINE	Hebrew

Byte 3	Byte 4	Code Position	Name	Set
012	224	14/00	HEBREW LETTER ALEPH	Hebrew
012	225	14/01	HEBREW LETTER BET	Hebrew
012	226	14/02	HEBREW LETTER GIMEL	Hebrew
012	227	14/03	HEBREW LETTER DALET	Hebrew
012	228	14/04	HEBREW LETTER HE	Hebrew
012	229	14/05	HEBREW LETTER WAW	Hebrew
012	230	14/06	HEBREW LETTER ZAIN	Hebrew
012	231	14/07	HEBREW LETTER CHET	Hebrew
012	232	14/08	HEBREW LETTER TET	Hebrew
012	233	14/09	HEBREW LETTER YOD	Hebrew
012	234	14/10	HEBREW LETTER FINAL KAPH	Hebrew
012	235	14/11	HEBREW LETTER KAPH	Hebrew
012	236	14/12	HEBREW LETTER LAMED	Hebrew
012	237	14/13	HEBREW LETTER FINAL MEM	Hebrew
012	238	14/14	HEBREW LETTER MEM	Hebrew
012	239	14/15	HEBREW LETTER FINAL NUN	Hebrew
012	240	15/00	HEBREW LETTER NUN	Hebrew
012	241	15/01	HEBREW LETTER SAMECH	Hebrew
012	242	15/01 $15/02$	HEBREW LETTER A'YIN	Hebrew
012	243	15/03	HEBREW LETTER FINAL PE	Hebrew
012	244	15/04	HEBREW LETTER PE	Hebrew
012	245	15/05	HEBREW LETTER FINAL ZADE	Hebrew
012	246	15/06	HEBREW LETTER ZADE	Hebrew
012	247	15/07	HEBREW QOPH	Hebrew
012	248	15/08	HEBREW RESH	Hebrew
012	249	15/09	HEBREW SHIN	Hebrew
012	250	15/10	HEBREW TAW	Hebrew
255	008	00/08	BACKSPACE, BACK SPACE, BACK CHAR	Keyboa
255	009	00/09	TAB	Keyboai
255 255	010	00/09	LINEFEED, LF	Keyboai
255 255	010	00/10	CLEAR	Keyboai
255 255	013	00/11	RETURN, ENTER	Keyboai
255	019	01/03	PAUSE, HOLD	Keyboar
255	020	01/04	SCROLL LOCK	Keyboai
255	027	01/11	ESCAPE	Keyboai
255	032	02/00	MULTI-KEY CHARACTER PREFACE	Keyboai
255	033	02/01	KANJI, KANJI CONVERT	Keyboa
255	034	02/02	MUHENKAN	Keyboar
255	035	02/03	HENKAN MODE	Keyboar
255	036	02/04	ROMAJI	Keyboa
255	037	02/05	HIRAGANA	Keyboar
255	038	02/06	KATAKANA	Keyboar
255	039	02/07	HIRAGANA/KATAKANA TOGGLE	Keyboar
255	040	02/08	ZENKAKU	Keyboar
255	041	02/09	HANKAKU	Keyboa
255	042	02/10	ZENKAKU/HANKAKU TOGGLE	Keyboa
255	043	02/11	TOUROKU	Keyboa
255	044	02/12	MASSYO	Keyboa
255	045	02/13	KANA LOCK	Keyboa
255	046	02/14	KANA SHIFT	Keyboa

Byte 3	Byte 4	Code Position	Name	Set
255	047	02/15	EISU SHIFT	Keyboard
255	048	03/00	EISU TOGGLE	Keyboard
255	080	05/00	HOME	Keyboard
255	081	05/01	LEFT, MOVE LEFT, LEFT ARROW	Keyboard
255	082	05/02	UP, MOVE UP, UP ARROW	Keyboard
255	083	05/03	RIGHT, MOVE RIGHT, RIGHT ARROW	Keyboard
255	084	05/04	DOWN, MOVE DOWN, DOWN ARROW	Keyboard
255	085	05/05	PRIOR, PREVIOUS	Keyboard
255	086	05/06	NEXT	Keyboard
255	087	05/07	END, EOL	Keyboard
255	088	05/08	BEGIN, BOL	Keyboard
255	096	06/00	SELECT, MARK	Keyboard
255	097	06/01	PRINT	Keyboard
255	098	06/02	EXECUTE, RUN, DO	Keyboard
255	099	06/03	INSERT, INSERT HERE	Keyboard
255	101	06/05	UNDO, OOPS	Keyboard
255	102	06/06	REDO, AGAIN	Keyboard
255	103	06/07	MENU	Keyboard
255	104	06/08	FIND, SEARCH	Keyboard
255	105	06/09	CANCEL, STOP, ABORT, EXIT	Keyboard
255	106	06/10	HELP, QUESTION MARK	Keyboard
255	107	06/11	BREAK	Keyboard
255	126	07/14	MODE SWITCH, SCRIPT SWITCH, CHARACTER SET SWITCH	Keyboard
255	127	07/14	NUM LOCK	Keyboard
255	128	08/00		Keyboard
255	137	08/00	KEYPAD SPACE	
255 255	141		KEYPAD TAB	Keyboard
		08/13	KEYPAD ENTER	Keyboard
255	145	09/01	KEYPAD F1, PF1, A	Keyboard
255	146	09/02	KEYPAD F2, PF2, B	Keyboard
255	147	09/03	KEYPAD F3, PF3, C	Keyboard
255	148	09/04	KEYPAD F4, PF4, D	Keyboard
255	170	10/10	KEYPAD MULTIPLICATION SIGN, ASTERISK	Keyboard
255	171	10/11	KEYPAD PLUS SIGN	Keyboard
255	172	10/12	KEYPAD SEPARATOR, COMMA	Keyboard
255	173	10/13	KEYPAD MINUS SIGN, HYPHEN	Keyboard
255	174	10/14	KEYPAD DECIMAL POINT, FULL STOP	Keyboard
255	175	10/15	KEYPAD DIVISION SIGN, SOLIDUS	Keyboard
255	176	11/00	KEYPAD DIGIT ZERO	Keyboard
255	177	11/01	KEYPAD DIGIT ONE	Keyboard
255	178	11/02	KEYPAD DIGIT TWO	Keyboard
255	179	11/03	KEYPAD DIGIT THREE	Keyboard
255	180	11/04	KEYPAD DIGIT FOUR	Keyboard
255	181	11/05	KEYPAD DIGIT FIVE	Keyboard
255	182	11/06	KEYPAD DIGIT SIX	Keyboard
255	183	11/07	KEYPAD DIGIT SEVEN	Keyboard
255	184	11/08	KEYPAD DIGIT EIGHT	Keyboard
255	185	11/09	KEYPAD DIGIT NINE	Keyboard
255	189	11/13	KEYPAD EQUALS SIGN	Keyboard
255	190	11/14	F1	Keyboard
255	191	11/15	F2	Keyboard
255	192	12/00	F3	Keyboard
255	193	12/01	F4	Keyboard

		Code		
Byte 3	Byte 4	Position	Name	Set
255	194	12/02	F5	Keyboard
255	195	12/03	F6	Keyboard
255	196	12/04	F7	Keyboard
255	197	12/05	F8	Keyboard
255	198	12/06	F9	Keyboard
255	199	12/07	F10	Keyboard
255	200	12/08	F11, L1	Keyboard
255	201	12/09	F12, L2	Keyboard
255	202	12/10	F13, L3	Keyboard
255	203	12/11	F14, L4	Keyboard
255	204	12/12	F15, L5	Keyboard
255	205	12/13	F16, L6	Keyboard
255	206	12/14	F17, L7	Keyboard
255	207	12/15	F18, L8	Keyboard
255	208	13/00	F19, L9	Keyboard
255	209	13/01	F20, L10	Keyboard
255	210	13/02	F21, R1	Keyboard
255	211	13/03	F22, R2	Keyboard
255	212	13/04	F23, R3	Keyboard
255	213	13/05	F24, R4	Keyboard
255	214	13/06	F25, R5	Keyboard
255	215	13/07	F26, R6	Keyboard
255	216	13/08	F27, R7	Keyboard
255	217	13/09	F28, R8	Keyboard
255	218	13/10	F29, R9	Keyboard
255	219	13/11	F30, R10	Keyboard
255	220	13/12	F31, R11	Keyboard
255	221	13/13	F32, R12	Keyboard
255	222	13/14	F33, R13	Keyboard
255	223	13/15	F34, R14	Keyboard
255	224	14/00	F35, R15	Keyboard
255	225	14/01	LEFT SHIFT	Keyboard
255	226	14/02	RIGHT SHIFT	Keyboard
255	227	14/03	LEFT CONTROL	Keyboard
255	228	14/04	RIGHT CONTROL	Keyboard
255	229	14/05	CAPS LOCK	Keyboard
255	230	14/06	SHIFT LOCK	Keyboard
255	231	14/07	LEFT META	Keyboard
255	232	14/08	RIGHT META	Keyboard
255	233	14/09	LEFT ALT	Keyboard
255	234	14/10	RIGHT ALT	Keyboard
255	235	14/11	LEFT SUPER	Keyboard
255	236	14/12	RIGHT SUPER	Keyboard
255	237	14/13	LEFT HYPER	Keyboard
255	238	14/14	RIGHT HYPER	Keyboard
255	255	15/15	DELETE, RUBOUT	Keyboard

KEYSYM Encoding

Appendix B Protocol Encoding

B.1 Syntactic Conventions

All numbers are in decimal, unless prefixed with #x, in which case they are in hexadecimal (base 16).

The general syntax used to describe requests, replies, errors, events and compound types is:

NameofThing encode-form ... encode-form

Each encode-form describes a single component.

For components described in the protocol as:

name: TYPE the encode-form is:

N TYPE name

N is the number of bytes occupied in the data stream, and TYPE is the interpretation of those bytes. For example,

depth: CARD8

becomes:

1 CARD8 depth

For components with a static numeric value the encode-form is:

N value name

The value is always interpreted as an N-byte unsigned integer. For example, the first two bytes of a Window error are always zero (indicating an error in general) and three (indicating the Window error in particular):

1 0 Error 1 3 code

For components described in the protocol as:

name: {Name1, ..., Name1}

the encode-form is:

N name value1 Name1 ... valueI NameI

The value is always interpreted as an N-byte unsigned integer. Note that the size of N is sometimes larger than that strictly required to encode the values. For example:

class: {InputOutput, InputOnly, CopyFromParent}

becomes:

2	class

0 CopyFromParent 1 InputOutput 2 InputOnly

For components described in the protocol as:

NAME: TYPE or Alternative1 ...or AlternativeI

the encode-form is:

N TYPE NAME value1 Alternative1

•••

valueI AlternativeI

The alternative values are guaranteed not to conflict with the encoding of TYPE. For example:

destination: WINDOW or PointerWindow or InputFocus

becomes:

4	WINDOW	destination
	0	PointerWindow
	1	InputFocus

For components described in the protocol as:

value-mask: BITMASK

the encode-form is:

N BITMASK value-mask mask1 mask-name1

•••

maskI mask-nameI

The individual bits in the mask are specified and named, and N is 2 or 4. The most-significant bit in a BITMASK is reserved for use in defining chained (multiword) bitmasks, as extensions augment existing core requests. The precise interpretation of this bit is not yet defined here, although a probable mechanism is that a 1-bit indicates that another N bytes of bitmask follows, with bits within the overall mask still interpreted from least-significant to most-significant with an N-byte unit, with N-byte units interpreted in stream order, and with the overall mask being byte-swapped in individual N-byte units.

For LISTofVALUE encodings, the request is followed by a section of the form:

VALUEs

encode-form

...

encode-form

listing an encode-form for each VALUE. The NAME in each encode-form keys to the corresponding BITMASK bit. The encoding of a VALUE always occupies four bytes, but the number of bytes specified in the encoding-form indicates how many of the least-significant bytes are actually used; the remaining bytes are unused and their values do not matter.

In various cases, the number of bytes occupied by a component will be specified by a lower-case single-letter variable name instead of a specific numeric value, and often some other component will have its value specified as a simple numeric expression involving these variables. Components specified with such expressions are always interpreted as unsigned integers. The scope of such variables is always just the enclosing request, reply, error, event or compound type structure. For example:

2 3+n request length

4n LISTofPOINT points

For unused bytes (the values of the bytes are undefined and do no matter), the encode-form is:

N unused

If the number of unused bytes is variable, the encode-form typically is:

p unused, p=pad(E)

where E is some expression, and pad(E) is the number of bytes needed to round E up to a multiple of four.

 $pad(E) = (4 - (E \mod 4)) \mod 4$

Common Types Protocol Encoding

B.2 Common Types

LISTofFOO

In this document the LISTof notation strictly means some number of repetitions of the FOO encoding; the actual length of the list is encoded elsewhere.

SETofFOO

A set is always represented by a bitmask, with a 1-bit indicating presence in the set.

BITMASK: CARD32 WINDOW: CARD32 PIXMAP: CARD32 CURSOR: CARD32 FONT: CARD32

GCONTEXT: CARD32 COLORMAP: CARD32 DRAWABLE: CARD32 FONTABLE: CARD32 ATOM: CARD32

VISUALID: CARD32

BYTE: 8-bit value

INT8: 8-bit signed integer INT16: 16-bit signed integer INT32: 32-bit signed integer CARD8: 8-bit unsigned integer

CARD16: 16-bit unsigned integer

CARD32: 32-bit unsigned integer

TIMESTAMP: CARD32

BITGRAVITY

0	Forget
1	NorthWest
2	North
3	NorthEast
4	West
5	Center
6	East
7	SouthWest
8	South
9	SouthEast
10	Static

WINGRAVITY

0	Unmap
1	NorthWest

Protocol Encoding Common Types

2	North			
3	NorthEast			
4	West			
5	Center			
6	East			
7	SouthWest			
8	South			
9	SouthEast			
10	Static			
BOOL				
0	False			
1	True			
SETofEVENT	W. D.			
#x00000001	KeyPress			
#x00000002	KeyRelease			
#x00000004	ButtonPress			
#x00000008	ButtonRelease			
#x00000010	EnterWindow			
#x00000020	LeaveWindow			
#x00000040	PointerMotion			
#x00000080	PointerMotionHint			
#x00000100	Button1Motion			
#x00000200	Button2Motion			
#x00000400	Button3Motion			
#x00000800	Button4Motion			
#x00001000	Button5Motion			
#x00002000	ButtonMotion			
#x00004000	KeymapState			
#x00008000	Exposure			
#x00010000	VisibilityChange			
#x00020000	StructureNotify			
#x00040000	ResizeRedirect			
#x00080000	SubstructureNotify			
#x00100000	SubstructureRedirect			
#x00200000	FocusChange			
#x00400000	PropertyChange			
#x00800000	ColormapChange			
#x01000000	OwnerGrabButton			
#xFE000000	unused but must be zero			
SETofPOINTEREVENT				
Encodings are the same as for SETofEVENT, except with:				
	unused but must be zero			
SETofDEVICEEVENT				
Encodings are the same as for SETofEVENT, except with:				
#xFFFFC0B0 unused but must be zero				
WENGER CARROS				

KEYSYM: CARD32

Common Types Protocol Encoding

KEYCODE: CARD8 BUTTON: CARD8 SETofKEYBUTMASK

> #x0001 Shift Lock #x0002 Control #x0004 #x0008 Mod1 Mod2 #x0010 #x0020 Mod3 #x0040 Mod4 Mod5 #x0080 #x0100 Button1 Button2 #x0200 #x0400 Button3 #x0800 **Button4** #x1000 Button5

#xE000 unused but must be zero

SETofKEYMASK

Encodings are the same as for SETofKEYBUTMASK, except with:

#xFF00 unused but must be zero

STRING8: LISTofCARD8

STRING16: LISTofCHAR2B

CHAR2B

1	CARD8	byte1
1	CARD8	byte2

POINT

2 INT16 x 2 INT16 y

RECTANGLE

2 INT16 x
 2 INT16 y
 2 CARD16 width
 2 CARD16 height

ARC

2 INT16 X 2 INT16 y 2 CARD16 width 2 CARD16 height 2 INT16 angle1 angle2 INT16

HOST

Protocol Encoding Common Types

	1			family
		0	Internet	,
		1	DECnet	
		2	Chaos	
	1			unused
	2	n		length of address
	n	LISTofBYTE		address
	p			unused, $p=pad(n)$
STR				
	1	n		length of name in bytes
	n	STRING8		name

Keyboards Protocol Encoding

B.3 Keyboards

KEYCODE values are always greater than 7 (and less than 256).

KEYSYM values with the bit #x10000000 set are reserved as vendor-specific.

The names and encodings of the standard KEYSYM values are contained in Appendix A on page 103.

B.4 Pointers

BUTTON values are numbered starting with one.

Protocol Encoding Predefined Atoms

B.5 Predefined Atoms

PRIMARY	1	WM NORMAL HINTS	40
SECONDARY	2	WM_SIZE_HINTS	41
ARC	3	WM_ZOOM_HINTS	42
ATOM	4	MIN_SPACE	43
BITMAP	5	NORM SPACE	44
CARDINAL	6	MAX_SPACE	45
COLORMAP	7	END_SPACE	46
CURSOR	8	SUPERSCRIPT_X	47
CUT_BUFFER0	9	SUPERSCRIPT_Y	48
CUT_BUFFER1	10	SUBSCRIPT_X	49
CUT_BUFFER2	11	SUBSCRIPT_Y	50
CUT_BUFFER3	12	UNDERLINE_POSITION	51
CUT_BUFFER4	13	UNDERLINE_THICKNESS	52
CUT_BUFFER5	14	STRIKEOUT_ASCENT	53
CUT_BUFFER6	15	STRIKEOUT_DESCENT	54
CUT_BUFFER7	16	ITALIC_ANGLE	55
DRAWABLE	17	X_HEIGHT	56
FONT	18	QUAD_WIDTH	57
INTEGER	19	WEIGHT	58
PIXMAP	20	POINT_SIZE	59
POINT	21	RESOLUTION	60
RECTANGLE	22	COPYRIGHT	61
RESOURCE_MANAGER	23	NOTICE	62
RGB_COLOR_MAP	24	FONT_NAME	63
RGB_BEST_MAP	25	FAMILY_NAME	64
RGB_BLUE_MAP	26	FULL_NAME	65
RGB_DEFAULT_MAP	27	CAP_HEIGHT	66
RGB_GRAY_MAP	28	WM_CLASS	67
RGB_GREEN_MAP	29	WM_TRANSIENT_FOR	68
RGB_RED_MAP	30		
STRING	31		
VISUALID	32		
WINDOW	33		
WM_COMMAND	34		
WM_HINTS	35		
WM_CLIENT_MACHINE	36		
WM_ICON_NAME	37		
WM_ICON_SIZE	38		
WM_NAME	39		

Connection Setup Protocol Encoding

B.6 Connection Setup

For TCP connections, displays on a given host are numbered starting from 0, and the server for display N listens and accepts connections on port 6000 + N. For DECnet connections, displays on a given host are numbered starting from 0, and the server for display N listens and accepts connections on the object name obtained by concatenating "X\$X" with the decimal representation of N, for example, X\$X0 and X\$X1.

Information sent by the client at connection setup:

1			byte-order
	#x42	MSB first	•
	#x6C	LSB first	
1			unused
2	CARD16		protocol-major-version
2	CARD16		protocol-minor-version
2	n		length of authorization-protocol-name
2	d		length of authorization-protocol-data
2			unused
n	STRING8		authorization-protocol-name
p			unused, p=pad(n)
d	STRING8		authorization-protocol-data
q			unused, $q=pad(d)$

Except where explicitly noted in the protocol, all 16-bit and 32-bit quantities sent by the client must be transmitted with the specified byte order, and all 16-bit and 32-bit quantities returned by the server will be transmitted with this byte order.

Information received by the client if authorization fails:

1	0	failed
1	n	length of reason in bytes
2	CARD16	protocol-major-version
2	CARD16	protocol-minor-version
2	(n+p)/4	_
n	STRING8	
р		unused, $p=pad(n)$

Information received by the client if authorization is accepted:

Protocol Encoding Connection Setup

1 1 2 2 2 2 4 4 4 4 4 2 2	CARD16 CARD16 8+2n+(v+p+m)/4 CARD32 CARD32 CARD32 CARD32 V CARD16		success unused protocol-major-version protocol-minor-version length in 4-byte units of "additional data" release-number resource-id-base resource-id-mask motion-buffer-size length of vendor maximum-request-length
1	CARD8		number of SCREENs in roots
1	n		number for FORMATs in pixmap-formats
1			image-byte-order
	0	LSBFirst	3
	1	MSBFirst	
1			bitmap-format-bit-order
	0	LeastSignificant	
	1	MostSignificant	
1	CARD8		bitmap-format-scanline-unit
1	CARD8		bitmap-format-scanline-pad
1	KEYCODE		min-keycode
1	KEYCODE		max-keycode
4	CERTAIN LCC		unused
V	STRING8		vendor
p	LICE CODIAN		unused, p=pad(v)
8n	LISTOFFORMAT		pixmap-formats
m	LISTofSCREEN		roots (m is always a multiple of 4)
FORM	AT		
SCREE	1 CARD8 1 CARD8 1 CARD8 5		depth bits-per-pixel scanline-pad unused

Connection Setup Protocol Encoding

	4 4 4 4 4 2 2 2 2 2 2 2 2 1 1 1 1 1 1 1	WINDOW COLORMAP CARD32 CARD32 SETofEVENT CARD16 CARD16 CARD16 CARD16 CARD16 CARD16 VISUALID 0 1 2 BOOL CARD8 CARD8 LISTofDEPTH	Never WhenMapped Always	root default-colormap white-pixel black-pixel current-input-masks width-in-pixels height-in-pixels width-in-millimeters height-in-millimeters min-installed-maps max-installed-maps root-visual backing-stores save-unders root-depth number of DEPTHs in allowed-depths
DEPTH	I			
VISUA)		CARD8 n LISTofVISUALTYPE		depth unused number of VISUALTYPES in visuals unused
VISUA	L1 Y1 4	VISUALID		visual-id
	1 2 4 4 4	0 1 2 3 4 5 CARD8 CARD16 CARD32 CARD32	StaticGray GrayScale StaticColor PseudoColor TrueColor DirectColor	bits-per-rgb-value colormap-entries red-mask green-mask blue-mask unused

B.7 Requests

CreateWindow

1 1 2 4 4 2 2	1 CARD8 8+n WINDOW WINDOW INT16 INT16		opcode depth request length wid parent x
2	CARD16		y width
2	CARD16		height
2	CARD16		border-width
2	Of IRD10		class
~	0	CopyFromParent	ciuss
	1	InputOutput	
	2	InputOnly	
4	VISUALID	p <i>j</i>	visual
	0	CopyFromParent	
4	BITMASK	13	
	#x0000001	background-pixmap	
	#x0000002	background-pixel	
	#x0000004	border-pixmap	
	#x00000008	border-pixel	
	#x0000010	bit-gravity	
	#x00000020	win-gravity	
	#x00000040	backing-store	
	#x00000080	backing-planes	
	#x00000100	backing-pixel	
	#x00000200	override-redirect	
	#x00000400	save-under	
	#x00000800	event-mask	
	#x00001000	do-not-propagate-mask	
	#x00002000	colormap	
	#x00004000	cursor	
4n	LISTofVALUE		value-list

VALUEs

1		4	PIXMAP 0	None		background-pixmap
4 PIXMAP			1	ParentRelative		
CARD32		4	CARD32			
4 CARD32 border-pixel 1 BITGRAVITY win-gravity 1 WINGRAVITY win-gravity 1 VINGRAVITY backing-store		4	PIXMAP			border-pixmap
1 BITGRAVITY 1 WINGRAVITY 1 WINGRAVITY 1 WINGRAVITY 1 WINGRAVITY 1 Win-gravity backing-store 0 NotUseful 1 WhenMapped 2 Always 4 CARD32 Always 4 CARD32 backing-planes backing-pixel override-redirect save-under event-mask 4 SETOFEVENT 4 SETOFEVENT do-not-propagate-mask 4 COLORMAP 0 COPFROMParent 4 CURSOR 0 None ChangeWindow*Attributes 1 2 opcode 1 unused 2 3+n request length window 4 BITMASK encodings are the same as for CreateWindow 4 LISTOFVALUE encodings are the same as for CreateWindow GetWindow*Attributes GetWindow*Attributes GetWindow*Attributes GetWindow*Attributes Sin CreateWindow GetWindow*Attributes 1 3 opcode unused request length value-mask (has n bits set to 1) encodings are the same as for CreateWindow GetWindow*Attributes 1 3 opcode unused request length value-list encodings are the same as for CreateWindow GetWindow*Attributes 1 3 opcode unused request length				CopyFromParent	t	
MINGRAVITY win-gravity backing-store		4				
1						
O NotUseful 1			WINGRAVITY			
1		1				backing-store
4 CARD32 backing-planes backing-planes backing-pixel override-redirect save-under event-mask SETofEVENT event-mask SETofDEVICEEVENT do-not-propagate-mask COLORMAP copyFromParent CURSOR cursor None ChangeWindowAttributes 1 2 opcode 1 unused 2 3+n request length WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes GetWindowAttributes 1 3 opcode 1 unused request length value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused request length						
4 CARD32 backing-planes 4 CARD32 backing-pixel 1 BOOL override-redirect 2 SETOFEVENT save-under 4 SETOFDEVICEEVENT do-not-propagate-mask 4 COLORMAP colormap 0 CopyFromParent 4 CURSOR cursor 1 2 opcode 1 unused 2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTOFVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes GetWindowAttributes GetWindowAttributes 1 3 opcode 1 unused 2 opcode 2 unused 3 opcode 4 unused 4 opcode 4 unused 4 unused 4 opcode 4 o						
4 CARD32 backing-pixel 1 BOOL override-redirect 3 BOOL save-under 4 SETofEVENT do-not-propagate-mask 4 SETofDEVICEEVENT do-not-propagate-mask 4 COLORMAP colormap 0 CopyFromParent 4 CURSOR cursor 0 None ChangeWindow*Attributes 1 2 opcode 1 unused 2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindow*Attributes CetWindow*Attributes 1 3 opcode 1 unused 2 opcode 1 unused 2 value-list encodings are the same as for CreateWindow GetWindow*Attributes				Always		
1 BOOL save-under event-mask 4 SETofEVENT do-not-propagate-mask 4 SETofDEVICEEVENT do-not-propagate-mask 4 COLORMAP colormap 0 CopyFromParent 4 CURSOR cursor 0 None ChangeWindowAttributes 1 2 opcode 1 unused 2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes GetWindowAttributes 1 3 opcode 1 unused request length value-list encodings are the same as for CreateWindow GetWindowAttributes						backing-planes
1 BOOL save-under 4 SETofEVENT do-not-propagate-mask 4 COLORMAP colormap 0 CopyFromParent cursor 4 CURSOR cursor 0 None ChangeWintowAttributes 1 2 3+n request length WINDOW WINDOW BITMASK recateWindow 4 BITMASK recateWindow 4 ILISTofVALUE recodings are the same as for CreateWindow as for CreateWindow 4n LISTofVALUE recodings are the same as for CreateWindow as for CreateWindow as for CreateWindow UISTofVALUE recodings are the same as for CreateWindow as for CreateWindow as for CreateWindow FetWindowAttributes 1 3 opcode unused request length						backing-pixel
4 SETofEVENT do-not-propagate-mask 4 OCLORMAP colormap 0 CopyFromParent 4 CURSOR cursor 0 None ChangeWindwattributes 1 2 opcode 1 request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE encodings are the same as for CreateWindow GetWindowAttributes CetWindowAttributes 1 3 opcode 1 unused request length 4 value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow						
4 SETofDEVICEEVENT do-not-propagate-mask 4 COLORMAP copyFromParent 4 CURSOR cursor 0 None ChangeWindowAttributes 1 2 opcode 1 unused 2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow CetWindowAtributes CetWindowAtributes 1 3 opcode 1 unused 1 2 opcode 1 unused 1 2 request length						
4 COLORMAP CopyFromParent 4 CURSOR cursor 0 None ChangeWindowAttributes 1 2 opcode 1 unused 2 3+n request length window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow CetWindowAttributes GetWindowAttributes 1 3 opcode 1 unused 2 2 request length						
CURSOR cursor None ChangeWindowAttributes 1 2 opcode 1 unused 2 3+n request length WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow CetWindowAttributes GetWindowAttributes 1 3 opcode 1 unused request length				do-not-propagate	e-mask	
4 CURSOR cursor 0 None ChangeWindowAttributes 1 2 opcode 1 unused 2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length		4		C		colormap
ChangeWindowAttributes 1 2 opcode 1 unused 2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length		4	•	CopyFromParent	Į.	
ChangeWindowAttributes 1 2 opcode 1 unused 2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length		4		None		cursor
1 2 opcode 1 unused 2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length			U	None		
1 unused 2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length	ChangeV	Wind	lowAttributes			
2 3+n request length 4 WINDOW window 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length		_	2			
4 WINDOW 4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length		_				
4 BITMASK value-mask (has n bits set to 1) encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length						
encodings are the same as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length						
as for CreateWindow 4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length		4			value	e-mask (has n bits set to 1)
4n LISTofVALUE value-list encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length				e		
encodings are the same as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length					,	1
as for CreateWindow GetWindowAttributes 1 3 opcode 1 unused 2 2 request length		4n			value	e-list
GetWindowAttributes 1 3 opcode 1 unused 2 2 request length				e		
1 3 opcode 1 unused 2 2 request length			as for Createwindow			
1 unused 2 2 request length	GetWind	dow/	Attributes			
2 2 request length		1	3	0	pcode	
		1				
		2	2	re	equest	length
		4	WINDOW			
=>	=>					

=>

1 1	1		Reply backing-store
•	0 1	NotUseful WhenMapped	bucking store
	2	Always	
2	CARD16	J	sequence number
4	3		reply length
4	VISUALID		visual
2			class
	1	InputOutput	
1	2 BITGRAVITY	InputOnly	hit annuite
1	WINGRAVITY		bit-gravity win-gravity
4	CARD32		backing-planes
4	CARD32		backing-pixel
1	BOOL		save-under
1	BOOL		map-is-installed
1			map-state
	0	Unmapped	
	1	Unviewable	
1	2	Viewable	
1 4	BOOL COLORMAP		override-redirect
4	0	None	colormap
4	SETofEVENT	None	all-event-masks
4	SETofEVENT		your-event-mask
2	SETofDEVICEEVENT	Γ	do-not-propagate-mask
2			unused
DestroyWind	dow		
1	4		opcode
1			unused
2	2		request length
4	WINDOW		window
DestroySubv	vindows		
1	5		opcode
1			unused
2	2		request length
4	WINDOW		window
ChangeSaveS	Set		
1	6		opcode
1		_	mode
		Insert	
2	1 2	Delete	roquest langth
4	WINDOW		request length window

ReparentWir	ndow		

	1 1 2 4 4 2 2	7 4 WINDOW WINDOW INT16 INT16		opcode unused request length window parent x
MapWin				,
	1 1 2 4	8 2 WINDOW		opcode unused request length window
MapSub	wind	lows		
	1 1 2 4	9 2 WINDOW		opcode unused request length window
UnmapV				
	1 1 2 4	10 2 WINDOW		opcode unused request length window
UnmapS				window
	1 1 2 4	11 2 WINDOW		opcode unused request length window
Configu	reWi	ndow		
	1 1 2 4 2	3+n WINDOW BITMASK #x0001 #x0002 #x0004 #x0008 #x0010 #x0020 #x0040	x y width height border-width sibling stack-mode	opcode unused request length window value-mask (has n bits set to 1)
	z 4n	LISTofVALUE		unused value-list
VALUE	s			

	2 2 2 2 2 4 1	INT16 INT16 CARD16 CARD16 CARD16 WINDOW	Above Below TopIf BottomIf Opposite	x y width height border-width sibling stack-mode
Circulate	eWin	dow		
	1	13 0 1	RaiseLowest	opcode direction
	2 4	2 WINDOW	LowerHighest	request length window
GetGeon	netry			
	1 1 2 4	14 2 DRAWABLE		opcode unused request length drawable
	1 1 2 4 4 2 2 2 2 2 2 10	1 CARD8 CARD16 0 WINDOW INT16 INT16 CARD16 CARD16		Reply depth sequence number reply length root x y width height border-width unused
QueryTr				_
	1 1 2 4	15 2 WINDOW		opcode unused request length window

=>

```
1
      1
                                             Reply
       1
                                             unused
       2
           CARD16
                                             sequence number
       4
                                             reply length
       4
           WINDOW
                                             root
       4
           WINDOW
                                             parent
                              None
       2
           n
                                             number of WINDOWs in children
       14
                                             unused
           LISTofWINDOW
                                             children
       4n
InternAtom
       1
           16
                                             opcode
       1
           BOOL
                                             only-if-exists
      2
                                             request length
           2+(n+p)/4
       2
                                             length of name
       2
                                             unused
       n
           STRING8
                                             unused, p=pad(n)
       p
=>
       1
           1
                                             Reply
       1
                                             unused
       2
           CARD16
                                             sequence number
       4
                                             reply length
           ATOM
       4
                                             atom
           0
                              None
       20
                                             unused
GetAtomName
       1
           17
                                             opcode
                                             unused
      1
       2
                                             request length
           ATOM
       4
                                             atom
=>
           1
       1
                                             Reply
       1
       2
           CARD16
                                             sequence number
       4
           (n+p)/4
       2
                                             length of name
           n
       22
                                             unused
      n
           STRING8
                                             name
                                             unused, p=pad(n)
       p
ChangeProperty
```

	1	18		opcode
	1			mode
		0	Replace	
		1	Prepend	
		2	Append	
	2	6+(n+p)/4		request length
	4	WINDOW		window
	4	ATOM		property
	4	ATOM		type
	1	CARD8		format
	3			unused
	4	CARD32		length of data in format units
				(= n for format = 8)
				(= n/2 for format = 16)
				(= n/4 for format = 32)
	n	LISTofBYTE		data
				(n is a multiple of 2 for format = 16)
				(n is a multiple of 4 for format $= 32$)
	p			unused, p=pad(n)
Dila				Transfer Processing
Delete	ePrope.	rty		
	1	19		opcode
	1			unused
	2	3		request length
	4	WINDOW		window
	4	ATOM		property
CatDr	onontr			
GetPi	operty			
	1	20		opcode
	1	BOOL		delete
	2	6		request length
	4	WINDOW		window
	4	ATOM		property
	4	ATOM		type
		0	AnyPropertyTyp	
	4	CARD32	J 1 J J1	long-offset
	4	CARD32		long-length
				5 5
=>				

	1 1 2 4 4 4 4 4 12 n	1 CARD8 CARD16 (n+p)/4 ATOM 0 CARD32 CARD32	None	Reply format sequence number type bytes-after length of value in format units (= 0 for format = 0) (= n for format = 8) (= n/2 for format = 16) (= n/4 for format = 32) unused value (n is zero for format = 0) (n is a multiple of 2 for format = 16) (n is a multiple of 4 for format = 32)
I jetDu	p morti	ne.		unused, p=pad(n)
ListPro	регие 1	21		anada
	1	21		opcode unused
	2	2		request length
	4	WINDOW		window
=>		4		P 1
	1 1	1		Reply unused
	2	CARD16		sequence number
	4 2	n		reply length number of ATOMs in atoms
	2 22	n		unused
	4n	LISTofATOM		atoms
SetSele	ection	Owner		
	1	22		opcode
	1	4		unused
	2 4	4 WINDOW		request length owner
	4		None	OWNEI
	4	ATOM	-	selection
	4	TIMESTAMP	G	time
0 (0.1		0	CurrentTime	
Getsel		nOwner		
	1 1	23		opcode unused
	2	2		request length
	4	ATOM		selection
=>				

1 1 2 4 4 4 20	1 CARD16 0 WINDOW 0	None	Reply unused sequence number reply length owner unused
1 1 2 4 4 4 4	24 6 WINDOW ATOM ATOM ATOM O TIMESTAMP	None CurrentTime	opcode unused request length requestor selection target property time
SendEvent 1 1 2 4 32	25 BOOL 11 WINDOW 0 1 SETofEVENT standard event forma (see the Events section		opcode propagate request length destination ww event-mask event
1 1 2 4 2 1 1 4 4 4 4 4	26 BOOL 6 WINDOW SETofPOINTEREVED 0 1 WINDOW 0 CURSOR 0 TIMESTAMP 0	Synchronous Asynchronous Synchronous Asynchronou None None CurrentTime	keyboard-mode

=>

	1 1 2 4 24	1 0 1 2 3 4 CARD16	Success AlreadyGrabbed InvalidTime NotViewable Frozen	Reply status sequence number reply length unused
Ungral	Point	ter		
	1 1 2 4	27 2 TIMESTAMP 0	CurrentTime	opcode unused request length time
GrabBı	ıtton			
	1 1 2 4 2	28 BOOL 6 WINDOW SETofPOINTEREVE	ENT	opcode owner-events request length grab-window event-mask pointer-mode
	-	0	Synchronous	pointer mode
	1	0	Asynchronous Synchronous	keyboard-mode
	4	1 WINDOW	Asynchronou	s confine-to
	4	0 CURSOR	None None	cursor
	1	BUTTON 0	AnyButton	button
	1 2	SETofKEYMASK #x8000	AnyModifier	unused modifiers
Ungral	Butte	on		
	1 1 2	29 BUTTON 0 3	AnyButton	opcode button request length
	4 2	WINDOW SETofKEYMASK #x8000	AnyModifier	grab-window modifiers unused
CI.	4	D G. I		

 ${\it Change Active Pointer Grab}$

2	1 1 2 4 4 2 2	30 4 CURSOR 0 TIMESTAMP 0 SETofPOINTEREVEN	None CurrentTime NT	opcode unused request length cursor time event-mask unused
GrabKey	board	d		
: : :	1 1 2 4 4 1	31 BOOL 4 WINDOW TIMESTAMP 0 0	CurrentTime Synchronous Asynchronous	opcode owner-events request length grab-window time pointer-mode keyboard-mode
;	2	1	Synchronous Asynchronous	unused
=>				
;	1 1	1 0 1 2 3 4 CARD16	Success AlreadyGrabbed InvalidTime NotViewable Frozen	sequence number
	4 24	0		reply length unused
UngrabK		ard		
1	1 1 2 4	32 2 TIMESTAMP 0	CurrentTime	opcode unused request length time
GrabKey				

	1 1 2 4 2	33 BOOL 4 WINDOW SETofKEYMASK #x8000 KEYCODE	AnyModifier	opcode owner-events request length grab-window modifiers
	1	0 0 1 0	AnyKey Synchronous Asynchronous Synchronous Asynchronous	pointer-mode keyboard-mode
	3	•	risyncinonous	unused
	Key 1 1	34 KEYCODE		opcode
	2 4 2	0 3 WINDOW SETofKEYMASK #x8000	AnyKey AnyModifier	request length grab-window modifiers
AllowEv	2 vents			unused
	1 1 1	35 0 1 2 3 4 5 6 7 2 TIMESTAMP 0	AsyncPointer SyncPointer ReplayPointer AsyncKeyboard SyncKeyboard ReplayKeyboard AsyncBoth SyncBoth	opcode mode request length time
GrabSer	ver			
	1 1 2 Serve	36 1 r		opcode unused request length
J	1 1 2	37 1		opcode unused request length

1 1 2	38 2		opcode unused request length
4	WINDOW		window
=>			
1 1 2 4 4 4 4 2 2 2 2 2 2	1 BOOL CARD16 0 WINDOW WINDOW 0 INT16 INT16 INT16 INT16 SETofKEYBUTMAS	None	Reply same-screen sequence number reply length root child root-x root-y win-x win-y mask
6	SEIGIRETECTWIAS		unused
GetMotion	nEvents		
1 1 2 4 4	39 4 WINDOW TIMESTAMP 0 TIMESTAMP 0	CurrentTime CurrentTime	opcode unused request length window start stop
=>			
1 1 2 4 4 2 8;	n LISTofTIMECOORI)	Reply unused sequence number reply length number of TIMECOORDs in events unused
11WECO	TIMESTAMP		time
2 2	INT16		x y

Translate Coordinates

=>	1 1 2 4 4 2 2	40 4 WINDOW WINDOW INT16 INT16		opcode unused request length src-window dst-window src-x src-y	
=>					
	1 1 2 4	1 BOOL CARD16 0		Reply same-screen sequence number reply length	
	4	WINDOW	None	child	
	2 2 16	0 INT16 INT16	None	dst-x dst-y unused	
WarpP	ointer				
·	1 1	41		opcode unused	
	2 4	6 WINDOW		request length src-window	
	4	0 WINDOW 0	None None	dst-window	
	2	INT16	TVOIC	src-x	
	2	INT16		src-y	
	2	CARD16		src-width	
	2	CARD16		src-height	
	2	INT16		dst-x	
	2	INT16		dst-y	
SetInpu	ıtFocu	IS			
	1 1	42 0 1	None PointerRoot	opcode revert-to	
		2	Parent		
	2	3		request length	
	4	WINDOW		focus	
	4	0 1 TIMESTAMP	None PointerRoot	time	
		0	CurrentTime		
GetInp	GetInputFocus				
-	1	43		opcode	
	1	- -		unused	
	2	1		request length	

=>			
1 1	1		Reply revert-to
	0 1	None PointerRoot	
2	2 CARD16	Parent	sequence number
4 4	0 WINDOW	None	reply length focus
20	0	PointerRoot	unused
QueryKeyma	ар		
1	44		opcode
1 2	1		unused request length
=>			
1 1	1		Reply unused
2	CARD16		sequence number
4 32	2 LISTofCARD8		reply length keys
OpenFont			v
1	45		opcode
1 2	3+(n+p)/4		unused request length
4	FONT		fid
2 2	n		length of name unused
n	STRING8		unuseu
p			unused, p=pad(n)
CloseFont			
1	46		opcode
1 2	2		unused request length
4	FONT		font
QueryFont			
1	47		opcode
1 2	2		unused
4	FONTABLE		request length font

=>

		LISTofCHARINFO	LeftToRight RightToLeft	Reply unused sequence number reply length min-bounds unused max-bounds unused min-char-or-byte2 max-char-or-byte2 default-char number of FONTPROPs in properties draw-direction min-byte1 max-byte1 all-chars-exist font-ascent font-descent number of CHARINFOs in char-infos properties char-infos
FONTI	4	ATOM		name
CHAR	4	<32-bits>		value
CHAR	11NFC 2	INT16		left side bearing
	2	INT16 INT16		left-side-bearing right-side-bearing
	2	INT16		character-width
		INT16 INT16		ascent descent
	2	CARD16		attributes
QueryTextExtents				
	1	48		opcode
	1 2	BOOL 2+(2n+p)/4		odd length, True if p = 2 request length
	4	FONTABLE		font
	2n	STRING16		string
	p			unused, p=pad(2n)
=>				

=>

	1 1 2 4 2 2 2	1 0 1 CARD16 0 INT16 INT16 INT16	LeftToRight RightToLeft	Reply draw-direction sequence number reply length font-ascent font-descent overall-ascent
	2 4 4 4 4	INT16 INT32 INT32 INT32		overall-descent overall-width overall-left overall-right unused
ListFont	ts 1 1 2 2 2 n p	49 2+(n+p)/4 CARD16 n STRING8		opcode unused request length max-names length of pattern pattern unused, p=pad(n)
	1 1 2 4 2 22 n p	CARD16 (n+p)/4 CARD16 LISTofSTR		Reply unused sequence number reply length number of STRs in names unused names unused, p=pad(n)
ListFond	1 1 2 2 2 2 n p	thInfo 50 2+(n+p)/4 CARD16 n STRING8 or last in series)		opcode unused request length max-names length of pattern pattern unused, p=pad(n)

	1 1 2 4 12	1 n CARD16 7+2m+(n+p)/4 CHARINFO		Reply length of name in bytes sequence number reply length min-bounds
	4 12	CHARINFO		unused max-bounds
	4			unused
	2	CARD16		min-char-or-byte2
	2	CARD16		max-char-or-byte2
	2	CARD16		default-char
	2	m		number of FONTPROPs in properties
	1	0	LaATaDialet	draw-direction
		0 1	LeftToRight RightToLeft	
	1	CARD8	RightToLen	min-byte1
	1	CARD8		max-byte1
	1	BOOL		all-chars-exist
	2	INT16		font-ascent
	2	INT16		font-descent
	4	CARD32		replies-hint
	8m	LISTofFONTPROP		properties
	n	STRING8		name
	p			unused, $p=pad(n)$
]	FONTPROP Encodir	ngs are the same as fo	r QueryFont.	
	CHARINFO			
,		ngs are the same as fo	r OueryFont	
			i queryroni.	
=	=> (last in se	eries)		
	1	1		Reply
	1	0		last-reply indicator
	2	CARD16		sequence number
	4	7		reply length
	52			unused
	SetFontPath			
	1	51		opcode
	1			unused
	2	2+(n+p)/4		request length
	2	CARD16		number of STRs in path
	2			unused
	n	LISTofSTR		path
	p			unused, p=pad(n)
(GetFontPath			
	1	52		opcode
	1			unused
	2	1		request list
=	=>			

1 1 2 4 2 22 n p	1 CARD16 (n+p)/4 CARD16 LISTofSTR	Reply unused sequence number reply length number of STRs in path unused path unused, p=pad(n)
CreatePixma	p	
1	53	opcode
1	CARD8	depth
2	4	request length
4	PIXMAP	pid
4	DRAWABLE	drawable
2	CARD16	width
2	CARD16	height
FreePixmap		
1	54	opcode
1		unused
2	2	request length
4	PIXMAP	pixmap
CreateGC		

1	55		opcode
1			unused
2	4+n		request length
4	GCONTEXT		cid
4	DRAWABLE		drawable
4	BITMASK		value-mask (has n bits set to 1)
	#x0000001	function	
	#x0000002	plane-mask	
	#x00000004	foreground	
	#x00000008	background	
	#x00000010	line-width	
	#x00000020	line-style	
	#x00000040	cap-style	
	#x00000080	join-style	
	#x00000100	fill-style	
	#x00000200	fill-rule	
	#x00000400	tile	
	#x00000800	stipple	
	#x00001000	tile-stipple-x-origin	
	#x00002000	tile-stipple-y-origin	
	#x00004000	font	
	#x00008000	subwindow-mode	
	#x00010000	graphics-exposures	
	#x00020000	clip-x-origin	
	#x00040000	clip-y-origin	
	#x00080000	clip-mask	
	#x00100000	dash-offset	
	#x00200000	dashes	
	#x00400000	arc-mode	
4n	LISTofVALUE		value-list

VALUEs

1			function
1	0	Clear	Turicuon
	1	And	
	2	AndReverse	
	3	Сору	
	4	AndInverted	
	5	NoOp	
	6	Xor	
	7	Or	
	8	Nor	
	9	Equiv	
	10	Invert	
	11	OrReverse	
	12	CopyInverted	
	13	OrInverted	
	14	Nand	
	15	Set	
4	CARD32		plane-mask
4	CARD32		foreground
4	CARD32		background
2	CARD16		line-width
1			line-style
	0	Solid	
	1	OnOffDash	
	2	DoubleDash	. 1
1	0	NT IT	cap-style
	0	NotLast	
	1	Butt	
	2 3	Round	
1	3	Projecting	join-style
1	0	Miter	join-style
	1	Round	
	2	Bevel	
1	~	Bever	fill-style
-	0	Solid	iii style
	1	Tiled	
	2	Stippled	
	3	OpaqueStippled	
1		1 1 11	fill-rule
	0	EvenOdd	
	1	Winding	
4	PIXMAP	· ·	tile
4	PIXMAP		stipple
2	INT16		tile-stipple-x-origin
2	INT16		tile-stipple-y-origin
4	FONT		font
1			subwindow-mode
	0	ClipByChildren	
	1	Include Inferiors	• .
1	BOOL		graphics-exposures
2	INT16		clip-x-origin

2 4 2 1 1	INT16 PIXMAP 0 CARD16 CARD8	None Chord PieSlice	clip-y-origin clip-mask dash-offset dashes arc-mode
ChangeGC			
1 1 2 4 4	3+n GCONTEXT BITMASK encodings are the sa as for CreateGC LISTofVALUE encodings are the sa as for CreateGC		opcode unused request length gc value-mask (has n bits set to 1) value-list
CopyGC	as for Createde		
1 1 2 4 4 4	57 4 GCONTEXT GCONTEXT BITMASK encodings are the sa as for CreateGC	ume	opcode unused request length src-gc dst-gc value-mask
SetDashes			
1 1 2 4 2 2 2 n p	58 3+(n+p)/4 GCONTEXT CARD16 n LISTofCARD8		opcode unused request length gc dash-offset length of dashes dashes unused, p=pad(n)

	1 1	59		opcode ordering
		0	UnSorted	
		1 2	YSorted YXSorted	
		3	YXBanded	
	2	3+2n	TADanaca	request length
	4	GCONTEXT		gc
	2	INT16		clip-x-origin
	2	INT16		clip-y-origin
	8n	LISTofRECTANGLE		rectangles
FreeGC	•			
	1	60		opcode
	1			unused
	2	2		request length
	4	GCONTEXT		gc
ClearA	rea			
	1	61		opcode
	1	BOOL		exposures
	2	4		request length
	4	WINDOW		window
	2	INT16		X
	2	INT16		у
	2 2	CARD16 CARD16		width
		CARDIO		height
CopyA	rea			
	1	62		opcode
	1	_		unused
	2	7		request length
	4	DRAWABLE		src-drawable
	4	DRAWABLE GCONTEXT		dst-drawable
	4 2	INT16		gc src v
	2	INT16 INT16		src-x src-y
	2	INT16		dst-x
	2	INT16		dst-y
	2	CARD16		width
	2	CARD16		height
CopyPl	ane			

	1 1 2 4 4 4 2 2 2 2 2 2 2 4	8 DRAWABLE DRAWABLE GCONTEXT INT16 INT16 INT16 CARD16 CARD16 CARD32		opcode unused request length src-drawable dst-drawable gc src-x src-y dst-x dst-y width height bit-plane
PolyPoi				_
	1	64 0	Origin	opcode coordinate-mode
		1	Previous	
	2 4	3+n DRAWABLE		request length drawable
	4	GCONTEXT		
	4 4n	LISTofPOINT		gc points
PolyLin	ıe.			1
1 01/ 211		e c		an and a
	1	65		opcode coordinate-mode
	1	0	Origin	coordinate mode
		1	Previous	
	2	3+n		request length
	4	DRAWABLE		drawable
	4	GCONTEXT		gc
	4n	LISTofPOINT		points
PolySeg	gment			
	1	66		opcode
	1			unused
	2	3+2n		request length
	4 4	DRAWABLE GCONTEXT		drawable
	4 8n	LISTofSEGMENT		gc segments
SEGMI		LIBTOIDEGIVIE		Segments
SEGIVII		INITE 1.0		1
	2 2	INT16 INT16		x1
	2	INT16 INT16		y1 x2
	2	INT16 INT16		y2
D / D				J ~
PolyRed	ctangl	e		

1	1 1 2 4 4 8n	67 3+2n DRAWABLE GCONTEXT LISTofRECTANGLE		opcode unused request length drawable gc rectangles
PolyArc				
1 2 4	1 1 2 4 4 12n	68 3+3n DRAWABLE GCONTEXT LISTOFARC		opcode unused request length drawable gc arcs
FillPoly				_
1	1 1 2 4 4	69 4+n DRAWABLE GCONTEXT 0	Complex	opcode unused request length drawable gc shape
1	1	1 2 0 1	Nonconvex Convex Origin Previous	coordinate-mode
	2		Tievious	unused
4	4n	LISTofPOINT		points
PolyFillR	Recta	ngle		
1	1 1 2 4 4 8n	70 3+2n DRAWABLE GCONTEXT LISTofRECTANGLE		opcode unused request length drawable gc
PolyFillA	Arc			
1	1 1 2 4 4 12n	71 3+3n DRAWABLE GCONTEXT LISTofARC		opcode unused request length drawable gc arcs

PutImage

1	72 0 1 2	Bitmap XYPixmap ZPixmap	opcode format
2 4 4 2 2 2 2 2 1 1 2 n p	6+(n+p)/4 DRAWABLE GCONTEXT CARD16 CARD16 INT16 INT16 CARD8 CARD8 LISTofBYTE		request length drawable gc width height dst-x dst-y left-pad depth unused data unused, p=pad(n)
GetImage 1 1 2 4 2	73 1 2 5 DRAWABLE INT16	XYPixmap ZPixmap	opcode format request length drawable x
2 2 2 2 4	INT16 CARD16 CARD16 CARD32		y width height plane-mask
1 1 2 4 4 4 20 n p	1 CARD8 CARD16 (n+p)/4 VISUALID 0 LISTofBYTE	None	Reply depth sequence number reply length visual unused data unused, p=pad(n)

1 1 2 4 4 2 2 2 n p TEXTITEM8	74 4+(n+p)/4 DRAWABLE GCONTEXT INT16 INT16 LISTOFTEXTITEM8	opcode unused request length drawable gc x y items unused, p=pad(n) (p is always 0 or 1) length of string (cannot be 255) delta
m	STRING8	string
or		
1 1 1 1 1	255	font-shift indicator font byte 3 (most-significant) font byte 2 font byte 1 font byte 0 (least-significant)
PolyText16		
1 1 2 4 4 2 2 n p	75 4+(n+p)/4 DRAWABLE GCONTEXT INT16 INT16 LISTofTEXTITEM16	opcode unused request length drawable gc x y items unused, p=pad(n) (p must be 0 or 1)
TEXTITEM1	16	
1 1	m INT8 STRING16	number of CHAR2Bs in string (cannot be 255) delta string
or		
1 1 1 1 1 ImageText8	255	font-shift indicator font byte 3 (most-significant) font byte 2 font byte 1 font byte 0 (least-significant)

1 1 2 4 4 2 2 n p	76 n 4+(n+p)/4 DRAWABLE GCONTEXT INT16 INT16 STRING8		opcode length of string request length drawable gc x y string unused, p=pad(n)
ImageText16			
2	n 4+(2n+p)/4 DRAWABLE GCONTEXT INT16 INT16 STRING16		opcode number of CHAR2Bs in string request length drawable gc x y string unused, p=pad(2n)
CreateColorn	man		unusea, p-paa(sii)
1 1 2 4	78 0 1 4 COLORMAP	None All	opcode alloc request length mid
4 4	WINDOW VISUALID		window visual
FreeColorma	p		
1 1 2 4	79 2 COLORMAP		opcode unused request length cmap
CopyColorm	apAndFree		
1 1 2 4 4	3 COLORMAP COLORMAP		opcode unused request length mid src-cmap
InstallColorn	nap		
1 1 2 4 UninstallCol	81 2 COLORMAP lormap		opcode unused request length cmap

	1 1	82	opcode unused
	2		request length
	4	COLORMAP	cmap
ListIns	stalled	Colormaps	
	1	83	opcode
	1		unused
	2	2	request length
	4	WINDOW	window
=>			
	1	1	Reply
	1		unused
	2	CARD16	sequence number
	4	n	reply length
	2	n	number of COLORMAPs in cmaps
	22		unused
	4n	LISTofCOLORMAP	cmaps
AllocC	Color		
	1	84	opcode
	1		unused
	2	4	request length
	4	COLORMAP	cmap
	2	CARD16	red
	2	CARD16	green
	2	CARD16	blue
	2		unused
=>			
	1	1	Reply
	1		unused
	2	CARD16	sequence number
	4	0	reply length
	2	CARD16	red
	2	CARD16	green
	2	CARD16	blue
	2	CARROS	unused
	4	CARD32	pixel
	12		unused
AllocN	Jamed	Color	
	1	85	opcode
	1	0 () (4	unused
	2	3+(n+p)/4	request length
	4	COLORMAP	cmap
	2 2	n	length of name unused
	z n	STRING8	name
	p	DIMINO	unused, p=pad(n)
	Ь		anasca, p-paa(ii)

=>			
	1	1	Reply
	1		unused
	2	CARD16	sequence number
	4	0	reply length
	4	CARD32	pixel
	2	CARD16	exact-red
	2	CARD16	exact-green
	2	CARD16	exact-blue
	2	CARD16	visual-red
	2	CARD16	visual-green
	2	CARD16	visual-blue
	8		unused
AllocC	olorCe	ells	
	1	86	opcode
	1	BOOL	contiguous
	2	3	request length
	4	COLORMAP	cmap
	2	CARD16	colors
	2	CARD16	planes
=>			•
	1	1	Donley
	1 1	1	Reply
	2	CARD16	unused
	ے 4		sequence number
	2	n+m	reply length
	2	n	number of CARD32s in pixels number of CARD32s in masks
	20	m	unused
	20 4n	LISTofCARD32	pixels
	411 4m	LISTOICARD32 LISTofCARD32	masks
			Illasks
AllocC	olorPl	anes	
	1	87	opcode
	1	BOOL	contiguous
	2	4	request length
	4	COLORMAP	cmap
	2	CARD16	colors
	2	CARD16	reds
		CARRAG	
	2 2	CARD16 CARD16	greens blues

=>

1	1		Reply	
1			unused	
2	CARD16		sequence nu	mber
4	n		reply length	
2	n			ARD32s in pixels
2			unused	1
4	CARD32		red-mask	
4	CARD32		green-mask	
4	CARD32		blue-mask	
8				
4n	LISTofCARD32		pixels	
FreeColors				
1	88		opcode	
1			unused	
2	3+n		request leng	th
4	COLORMAP		cmap	
4	CARD32		plane-mask	
4n	LISTofCARD32		pixels	
StoreColors			r	
StoreColors				
1	89		opcode	
1			unused	
2	2+3n		request leng	th
4	COLORMAP		cmap	
12n	LIST of COLORITEM		items	
COLORITE	M			
4	CARD32			pixel
$\overset{\circ}{2}$	CARD16			red
2	CARD16			green
2	CARD16			blue
1	0.11.210			do-red, do-green, do-blue
*	#x01	do-red (1 is True,	0 is False)	as rea, as green, as blue
	#x02	do-green (1 is Tru		
	#x04	do-blue (1 is True		
	#xF8	unused	c, c 15 1 alse)	
1	·· •			unused
-				

Query	1 1 2 4 4 2 2 n p	90 #x01 #x02 #x04 #xF8 4+(n+p)/4 COLORMAP CARD32 n STRING8	do-red (1 is True, 0 is False) do-green (1 is True, 0 is False) do-blue (1 is True, 0 is False) unused	opcode do-red, do-green, do-blue request length cmap pixel length of name unused name unused, p=pad(n)
v	1	91	opcode	
	1	01	unused	
	2	2+n	request leng	gth
	4	COLORMAP	cmap	
	4n	LISTofCARD32	pixels	
=>				
	1	1	Reply	
	1		unused	
	2	CARD16	sequence nu	
	4	2n	reply length	l
	2	n		RGBs in colors
	22	I ICT-(DCD	unused	
	8n	LISTofRGB	colors	
RGB				
	2	CARD16	red	
	2	CARD16	green	
	2	CARD16	blue	
	2		unused	
Lookup	Color	,		
	1	92	opcode	
	1		unused	
	2	3+(n+p)/4	request leng	gth
	4	COLORMAP	cmap	mo
	2 2	n	length of na unused	ille
	n	STRING8	name	
	p	211111100	unused, p=1	oad(n)
_~	1		 , F 1	
=>				

168

Protocol Encoding Requests

1 1 2 4 2 2 2 2 2 2 2 2 12	CARD16 0 CARD16 CARD16 CARD16 CARD16 CARD16 CARD16 CARD16		Reply unused sequence number reply length exact-red exact-green exact-blue visual-red visual-green visual-blue unused
CreateCurso	r		
1 1 2 4 4 4 2 2 2 2 2 2 2 2 2 2	93 8 CURSOR PIXMAP PIXMAP 0 CARD16	None	opcode unused request length cid source mask fore-red fore-green fore-blue back-red back-green back-blue x
~ CreateGlyph			y
1 1 2 4 4 4 4 2 2 2 2 2 2 2 2 2 2	94 8 CURSOR FONT FONT 0 CARD16	None	opcode unused request length cid source-font mask-font source-char mask-char fore-red fore-green fore-blue back-red back-green back-blue
FreeCursor			
1 1 2 4	95 2 CURSOR		opcode unused request length cursor

Requests Protocol Encoding

Recolor	Curso	or		
	1	96		opcode
	1			unused
	2	5		request length
	4	CURSOR		cursor
	2	CARD16		fore-red
	2	CARD16		fore-green
	2	CARD16		fore-blue
	2	CARD16		back-red
	2	CARD16		back-green
	2	CARD16		back green back-blue
QueryI				buck blue
Queryi				1
	1	97		opcode
	1	0		class
		0	Cursor	
		1	Tile	
		2	Stipple	
	2	3		request length
	4	DRAWABLE		drawable
	2	CARD16		width
	2	CARD16		height
=>				
	1	1		Donly
	1	1		Reply unused
	2	CARD16		
	د 4			sequence number
	2	0 CARD10		reply length
		CARD16		width
	2	CARD16		height
	20			unused
Queryl				_
	1	98		opcode
	1			unused
	2	2+(n+p)/4		request length
	2	n		length of name
	2			unused
	n	STRING8		name
	p			unused, p=pad(n)
=>				
	1	1		Reply
	1	•		unused
	2	CARD16		sequence number
	4	0		reply length
	1	BOOL		present
	1	CARD8		major-opcode
	1	CARD8		first-event
	1	CARD8		first-error
	20	OMINDO		unused
	۵U			unuseu

Protocol Encoding Requests

ListExt	tensio	ns	ListExtensions			
	1	99	opcode			
	1		unused			
	2	1	request length			
=>						
	1	1	Reply			
	1	CARD8	number of STRs in names			
	2	CARD16	sequence number			
	4	(n+p)/4	reply length			
	24		unused			
	n	LISTofSTR	names			
	p		unused, p=pad(n)			
Change	eKeyb	oardMapping				
	1	100	opcode			
	1	n	keycode-count			
	2	2+nm	request length			
	1	KEYCODE	first-keycode			
	1	m	keysyms-per-keycode			
	2		unused			
	4nn	n LISTofKEYSYM	keysyms			
GetKey	board	Mapping				
	1	101	opcode			
	1		unused			
	2	2	request length			
	1	KEYCODE	first-keycode			
	1	m	count			
	2		unused			
=>						
	1	1	Reply			
	1	n	keysyms-per-keycode			
	2	CARD16	sequence number			
	4	nm	reply length (m = count field from the request)			
	24		unused			
	4nn	ı LISTofKEYSYM	keysyms			

 ${\it Change Key board Control}$

Requests Protocol Encoding

```
102
       1
                                                  opcode
       1
                                                  unused
       2
            2+n
                                                 request length
            BITMASK
                                                  value-mask (has n bits set to 1)
            #x0001
                                key-click-percent
            #x0002
                                bell-percent
            #x0004
                                bell-pitch
            #x0008
                                bell-duration
                                led
            #x0010
            #x0020
                                led-mode
            #x0040
                                key
            #x0080
                                auto-repeat-mode
           LISTofVALUE
                                                  value-list
VALUEs
            INT8
                                                key-click-percent
       1
       1
            INT8
                                                bell-percent
       2
            INT16
                                                bell-pitch
       2
            INT16
                                                bell-duration
                                                led
       1
            CARD8
                                                led-mode
       1
                                Off
            0
            1
                                On
            KEYCODE
                                                key
       1
       1
                                                auto-repeat-mode
            0
                                Off
            1
                                On
            2
                                Default
GetKeyboardControl
            103
       1
       1
       2
            1
=>
       1
            1
                                                Reply
                                                global-auto-repeat
       1
                                Off
            0
                                On
            1
       2
            CARD16
                                                sequence number
       4
                                                reply length
                                                led-mask
       4
            CARD32
       1
            CARD8
                                                key-click-percent
       1
            CARD8
                                                bell-percent
       2
                                                bell-pitch
            CARD16
       2
                                                bell-duration
            CARD16
       2
                                                unused
            LISTofCARD8
                                                auto-repeats
Bell
```

Protocol Encoding Requests

Chang	1 1 2	104 INT8 1		opcode percent request length
Change		terControl		_
	1 1	105		opcode unused
	2	3		request length
	2	INT16		acceleration-numerator
	2	INT16		acceleration-denominator
	2	INT16		threshold
	1	BOOL		do-acceleration
	1	BOOL		do-threshold
GetPoi	nterC	ontrol		
	1	106		opcode
	1			unused
	2	1		request length
=>				
	1	1		Reply
	1			unused
	2	CARD16		sequence number
	4	0		reply length
	2	CARD16		acceleration-numerator
	2	CARD16		acceleration-denominator
	2	CARD16		threshold
	18			unused
SetScr				
	1	107		opcode
	1	•		unused
	2	3		request length
	2 2	INT16		timeout
	1	INT16		interval prefer-blanking
	1	0	No	prefer-blanking
		1	Yes	
		2	Default	
	1			allow-exposures
		0	No	
		1	Yes	
		2	Default	
	2			unused
GetScr	reenSa	ver		
	1	108		opcode
	1			unused
	2	1		request length
=>				

Requests Protocol Encoding

1 1 2 4 2 2 1	1 CARD16 0 CARD16 CARD16 0 1	No Yes No Yes	Reply unused sequence number reply length timeout interval prefer-blanking allow-exposures
ChangeHost	's		
1 1 2 1 2 1 2 n p	109 0 1 2+(n+p)/4 0 1 2 n LISTofCARD8	Insert Delete Internet DECnet Chaos	opcode mode request length family unused length of address address unused, p=pad(n)
ListHosts		Disabled Enabled	opcode unused request length Reply mode sequence number reply length number of HOSTs in hosts unused hosts (n always a multiple of 4)
1 1 2	111 0 1 1	Disable Enable	opcode mode request length

Protocol Encoding Requests

SetClos	seDov	vnMode		
	1	112		opcode
	1			mode
		0	Destroy	
		1 2	RetainPermanen	
	2	1	RetainTemporary	request length
wilai		1		request length
KillCli	ent			
	1	113		opcode
	1	0		unused
	2 4	2 CARD32		request length resource
	4	0	AllTemporary	resource
D.4.4.1	D		imtemporary	
Rotatel	Prope			
	1	114		opcode
	1	0		unused
	2 4	3+n WINDOW		request length window
	2	n		number of properties
	2	INT16		delta
		LISTofATOM		properties
ForceS	creenS	Saver		•
	1	115		opcode
	1	113		mode
	_	0	Reset	
		1	Activate	
	2	1		request length
SetPoir	nterM	<i>Tapping</i>		
	1	116		opcode
	1	n		length of map
	2	1+(n+p)/4		request length
	n	LISTofCARD8		map
	p			unused, p=pad(n)
=>				
	1	1		Reply
	1			status
		0	Success	
	9	1 CARD16	Busy	
	2 4	CARD16 0		sequence number reply length
	24	U		unused
GetPoi		<i>Mapping</i>		
G011 01.				J
	1 1	117		opcode
	2	1		unused request length
	۵	1		request iengui

Requests Protocol Encoding

=>				
	1 1 2 4 24 n	1 n CARD16 (n+p)/4 LISTofCARD8		Reply length of map sequence number reply length unused map
C-4M-	р	familia d		unused, p=pad(n)
Setivio		Mapping		_
	1 1 2 8n	n 1+2n LISTofKEYCODE		opcode keycodes-per-modifier request length keycodes
=>				
	1	1 0 1 2	Success Busy Failed	Reply status
	2 4 24	CARD16	raneu	sequence number reply length unused
GetMo	difierl	Mapping		
	1 1 2	119 1		opcode unused request length
=>				
	1 1 2 4 24 8n	1 n CARD16 2n LISTofKEYCODE		Reply keycodes-per-modifier sequence number reply length unused keycodes
NoOpe	ration			v
pe	1 1 2	127		opcode unused request length
				. 0

Protocol Encoding Events

B.8 Events

KeyPress

1	2		code
1	KEYCODE		detail
2	CARD16		sequence number
4	TIMESTAMP		time
4	WINDOW		root
4	WINDOW		event
4	WINDOW		child
	0	None	
2	INT16		root-x
2	INT16		root-y
2	INT16		event-x
2	INT16		event-y
2	SETofKEYBUTMASK		state
1	BOOL		same-screen
1			unused

KeyRelease

1	3		code
1	KEYCODE		detail
2	CARD16		sequence number
4	TIMESTAMP		time
4	WINDOW		root
4	WINDOW		event
4	WINDOW		child
	0	None	
2	INT16		root-x
2	INT16		root-y
2	INT16		event-x
2	INT16		event-y
2	SETofKEYBUTMASK		-
1	BOOL		same-screen
1			unused

Button Press

Events Protocol Encoding

	1 1 2	4 BUTTON CARD16		code detail sequence number
	4	TIMESTAMP WINDOW		time root
	4	WINDOW		event
	4	WINDOW		child
		0	None	
	2	INT16		root-x
	2	INT16		root-y
	2	INT16		event-x
	2 2	INT16 SETofKEYBUTMASK		event-y
	د 1	BOOL		state same-screen
	1	DOOL		unused
D T				unuscu
ButtonF	Keleas	e		
	1	5		code
	1	BUTTON		detail
	2	CARD16		sequence number
	4	TIMESTAMP		time
	4	WINDOW		root
	4	WINDOW WINDOW		event child
	4	0	None	Ciliu
	2	INT16	TVOIC	root-x
	2	INT16		root-y
	2	INT16		event-x
	2	INT16		event-y
	2	SETofKEYBUTMASK		state
	1	BOOL		same-screen
	1			unused
Motion	Notify	7		
	1	6		code
	1			detail
		0	Normal	
	0	1	Hint	•
	2	CARD16		sequence number
	4	TIMESTAMP		time
	4	WINDOW WINDOW		root event
	4	WINDOW		child
	•	0	None	oma
	2	INT16		root-x
	2	INT16		root-y
	2	INT16		event-x
	2	INT16		event-y
	2	SETofKEYBUTMASK		state
	1	BOOL		same-screen
	1			unused

Protocol Encoding Events

EnterNotify			
1	7		code
1			detail
	0	Ancestor	
	1	Virtual	
	2	Inferior	
	3	Nonlinear	
	4	NonlinearVirtual	
2	CARD16		sequence number
4	TIMESTAMP		time
4	WINDOW		root
4	WINDOW		event
4	WINDOW		child
	0	None	
2	INT16		root-x
2	INT16		root-y
2	INT16		event-x
2	INT16		event-y
2	SETofKEYBUTMASK		state
1			mode
	0	Normal	
	1	Grab	
	2	Ungrab	
1			same-screen, focus
	#x01	focus (1 is True, 0 is False)	
	#x02	same-screen (1 is True, 0 is False)	
	#xFC	unused	

Events Protocol Encoding

1	1	8			code
1	1				detail
		0	Ancestor		
		1	Virtual		
		2	Inferior		
		3	Nonlinear		
		4	NonlinearVirtua	ıl	
6	2	CARD16			sequence number
4	4	TIMESTAMP			time
4	4	WINDOW			root
4	4	WINDOW			event
4	4	WINDOW			child
		0	None		
	2	INT16			root-x
	2	INT16			root-y
	2	INT16			event-x
	2	INT16			event-y
4	2	SETofKEYBUTMASK	•		state
]	1				mode
		0	Normal		
		1	Grab		
		2	Ungrab		
]	1				same-screen, focus
		#x01	focus (1 is True,		
		#x02		s True, 0 is False)	
		#xFC	unused		
FocusIn					
		•		,	
	1	9		code	
	1	0		detail	
			Ancestor		
			Virtual		
			Inferior		
			Nonlinear NonlinearVirtual		
			Pointer		
		_	PointerRoot		
•	2	CARD16	None	anguana numba	A.W.
	د 4	WINDOW		sequence number event	:1
	1	WINDOW		mode	
_	1	0	Normal	mout	
			Grab		
			Ungrab		
			WhileGrabbed		
4	23	J	vviiiicarabbed	unused	
				anasca	
FocusOu	t				

Protocol Encoding Events

	1 1	10		code detail
	1	0	Ancestor	detail
		1	Virtual	
		2	Inferior	
		3	Nonlinear	
		4	NonlinearVirtual	
		5	Pointer	
		6	PointerRoot	
	0	7	None	
	2 4	CARD16 WINDOW		sequence number event
	1	WINDOW		mode
	1	0	Normal	mode
		1	Grab	
		2	Ungrab	
		3	WhileGrabbed	
	23	-		unused
Keymaj	oNoti	fv		
<i>J</i> 1	1	11		code
	31	LISTofCARD8		keys (byte for keycodes 0-7 is omitted)
-		LISTOICARDO		keys (byte for keycodes 0-7 is offitted)
Expose				
	1	12		code
	1			unused
	2	CARD16		sequence number
	4	WINDOW		window
	2	CARD16		X
	2	CARD16		у
	2	CARD16		width
	2	CARD16		height
	2	CARD16		count
	14			unused
Graphic	csExp	osure		
	1	13		code
	1			unused
	2	CARD16		sequence number
	4	DRAWABLE		drawable
	2	CARD16		X
	2	CARD16		у
	2	CARD16		width
	2	CARD16		height
	2	CARD16		minor-opcode
	2	CARD16		count
	1 11	CARD8		major-opcode unused
				unuseu
NoExpo	osure			

Events Protocol Encoding

1 1 2 4 2 1 21	CARD16 DRAWABLE CARD16 CARD8		code unused sequence number drawable minor-opcode major-opcode unused
VisibilityNo	tify		
1 1 2 4 1	CARD16 WINDOW 0 1 2	Unobscured PartiallyObscure FullyObscured	
23	_		unused
CreateNotify 1 1 2 4 4 2 2 2 2 1 9	CARD16 WINDOW WINDOW INT16 INT16 CARD16 CARD16 CARD16 BOOL		code unused sequence number parent window x y width height border-width override-redirect unused
DestroyNoti	fy		
1 1 2 4 4 20 <i>UnmapNotin</i>	17 CARD16 WINDOW WINDOW		code unused sequence number event window unused
1	18		code
1 2 4 4 1 19 MapNotify	CARD16 WINDOW WINDOW BOOL		unused sequence number event window from-configure unused
ινιαρινυιμή			

Protocol Encoding **Events**

1 1 2 4 4 1 19	CARD16 WINDOW WINDOW BOOL		code unused sequence number event window override-redirect unused
MapRequest			
1 1 2 4 4 20	CARD16 WINDOW WINDOW		code unused sequence number parent window unused
ReparentNot			
1 1 2 4 4 4 2 2 1 11	CARD16 WINDOW WINDOW WINDOW INT16 INT16 BOOL		code unused sequence number event window parent x y override-redirect unused
ConfigureNo	•		
1 1 2 4 4 4 4 2 2 2 2 2 2 1 5	CARD16 WINDOW WINDOW WINDOW 0 INT16 INT16 CARD16 CARD16 CARD16 CARD16 BOOL	None	code unused sequence number event window above-sibling x y width height border-width override-redirect unused

Events Protocol Encoding

	1 1	23		code
	1	0	Above	stack-mode
		1	Below	
		2	TopIf	
		3	BottomIf	
		4	Opposite	
	2	CARD16		sequence number
	4	WINDOW		parent
	4	WINDOW		window
	4	WINDOW	NT	sibling
	0	0 IN UT 1 0	None	
	2	INT16		X
	2 2	INT16		y width
	2	CARD16 CARD16		
	2	CARD16		height border-width
	2	BITMASK		value-mask
	۵	#x0001	X	value-illask
		#x0001 #x0002	y	
		#x0004	width	
		#x0008	height	
		#x0010	border-width	
		#x0020	sibling	
		#x0040	stack-mode	
	4			unused
Gravity	Notif	fy		
	1	24		code
	1			unused
	2	CARD16		sequence number
	4	WINDOW		event
	4	WINDOW		window
	2	INT16		X
	2	INT16		y
	16			unused
ResizeF	Reques	st		
	1	25		code
	1			unused
	2	CARD16		sequence number
	4	WINDOW		window
	2	CARD16		width
	2	CARD16		height
	20			unused
Circula	teNot	rify		

Protocol Encoding Events

1	26		code
1 2	CARD16		unused sequence number
4	WINDOW		event
4	WINDOW		window
4	WINDOW		unused
1			place
	0	Top	
	1	Bottom	•
15			unused
CirculateRe	equest		
1	27		code
1			unused
2	CARD16		sequence number
4	WINDOW		parent
4	WINDOW		window
4			unused
1	0	Top	place
	1	Top Bottom	
15	1	Dottom	unused
PropertyNo	ntify		
			1
1	28		code
1 2	CADD16		unused
2 4	CARD16 WINDOW		sequence number window
4	ATOM		atom
4	TIMESTAMP		time
1			state
	0	NewValue	
	1	Deleted	
15			unused
SelectionCl	ear		
1	29		code
1			unused
2	CARD16		sequence number
4	TIMESTAMP		time
4	WINDOW		owner
4	ATOM		selection
16			unused

Selection Request

Events Protocol Encoding

	1	20		anda
	1 1	30		code
	2	CARD16		sequence number
	4	TIMESTAMP		time
		0	CurrentTime	
	4	WINDOW		owner
	4 4	WINDOW		requestor selection
	4	ATOM ATOM		target
	4	ATOM		property
		0	None	1 1 3
	4			unused
Selectio	nNot	rify		
	1	31		code
	1	31		unused
	2	CARD16		sequence number
	4	TIMESTAMP		time
		0	CurrentTime	
	4	WINDOW		requestor
	4 4	ATOM ATOM		selection
	4	ATOM		target property
	•	0	None	property
	8			unused
Colorm	apNo	tify		
	1	32		code
	1	32		unused
	2	CARD16		sequence number
	4	WINDOW		window
	4	COLORMAP		colormap
		0	None	
	1 1	BOOL		new
	1	0	Uninstalled	state
		1	Installed	
	18			unused
ClientN	Messa	ge		
	1	33		code
	1	CARD8		format
	2	CARD16		sequence number
	4	WINDOW		window
	4	ATOM		type
	20			data
Mappii	ngNot	tify		

Protocol Encoding Events

1	34		code
1			unused
2	CARD16		sequence number
1			request
	0	Modifier	
	1	Keyboard	
	2	Pointer	
1	KEYCODE		first-keycode
1	CARD8		count
25			unused

Errors Protocol Encoding

B.9 Errors

Request		
1 1 2 4 2 1 21	0 1 CARD16 CARD16 CARD8	Error code sequence number unused minor opcode major opcode unused
Value		
1 1 2 4 2 1 21	0 2 CARD16 <32-bits> CARD16 CARD8	Error code sequence number bad value minor opcode major opcode unused
Window		
1 1 2 4 2 1 21	0 3 CARD16 CARD32 CARD16 CARD8	Error code sequence number bad resource id minor opcode major opcode unused
Pixmap		
1 1 2 4 2 1 21	0 4 CARD16 CARD32 CARD16 CARD8	Error code sequence number bad resource id minor opcode major opcode unused
Atom		
1 1 2 4 2 1 21	0 5 CARD16 CARD32 CARD16 CARD8	Error code sequence number bad atom id minor opcode major opcode unused

Cursor

Protocol Encoding Errors

	1 1 2 4 2 1 21	0 6 CARD16 CARD32 CARD16 CARD8	Error code sequence number bad resource id minor opcode major opcode unused
Font			
	1 1 2 4 2 1 21	0 7 CARD16 CARD32 CARD16 CARD8	Error code sequence number bad resource id minor opcode major opcode unused
Match			
	1 1 2 4 2 1 21	0 8 CARD16 CARD16 CARD8	Error code sequence number unused minor opcode major opcode unused
Drawal	ble		
	1 1 2 4 2 1 21	0 9 CARD16 CARD32 CARD16 CARD8	Error code sequence number bad resource id minor opcode major opcode unused
Access			
	1 2 4 2 1	0 10 CARD16 CARD16 CARD8	Error code sequence number unused minor opcode major opcode
	21		unused

Alloc

Errors Protocol Encoding

1 1 2 4 2 1 21	0 11 CARD16 CARD16 CARD8	Error code sequence number unused minor opcode major opcode unused
Colormap		
1 1 2 4 2 1 21	0 12 CARD16 CARD32 CARD16 CARD8	Error code sequence number bad resource id minor opcode major opcode unused
GContext		
1 1 2 4 2 1 21	0 13 CARD16 CARD32 CARD16 CARD8	Error code sequence number bad resource id minor opcode major opcode unused
<i>IDChoice</i>		
1 1 2 4 2 1 21	0 14 CARD16 CARD32 CARD16 CARD8	Error code sequence number bad resource id minor opcode major opcode unused
Name		
1 1 2 4 2 1 21	0 15 CARD16 CARD16 CARD8	Error code sequence number unused minor opcode major opcode unused
Length		

Protocol Encoding Errors

1 1 2 4 2 1 21 Implementat	0 16 CARD16 CARD16 CARD8	Error code sequence number unused minor opcode major opcode unused
1 1 2 4 2 1 2	0 17 CARD16 CARD16 CARD8	Error code sequence number unused minor opcode major opcode unused

Protocol Encoding

Glossary

Access control list

X maintains a list of hosts from which client programs can be run. By default, only programs on the local host and hosts specified in an initial list read by the server can use the display. Clients on the local host can change this access control list. Some server implementations can also implement other authorization mechanisms in addition to or in place of this mechanism. The action of this mechanism can be conditional based on the authorization protocol name and data received by the server at connection setup.

Active grab

A grab is active when the pointer or keyboard is actually owned by the single grabbing client.

Ancestors

If W is an inferior of A, then A is an ancestor of W.

Atom

An atom is a unique ID corresponding to a string name. Atoms are used to identify properties, types, and selections.

Background

An *InputOutput* window can have a background, which is defined as a pixmap. When regions of the window have their contents lost or invalidated, the server will automatically tile those regions with the background.

Backing store

When a server maintains the contents of a window, the pixels saved off screen are known as a backing store.

Bit gravity

When a window is resized, the contents of the window are not necessarily discarded. It is possible to request that the server relocate the previous contents to some region of the window (though no guarantees are made). This attraction of window contents for some location of a window is known as bit gravity.

Bit plane

When a pixmap or window is thought of as a stack of bitmaps, each bitmap is called a bit plane or plane.

Bitmap

A bitmap is a pixmap of depth one.

Border

An *InputOutput* window can have a border of equal thickness on all four sides of the window. A pixmap defines the contents of the border, and the server automatically maintains the contents of the border. Exposure events are never generated for border regions.

Button grabbing

Buttons on the pointer may be passively grabbed by a client. When the button is pressed, the pointer is then actively grabbed by the client.

Byte order

For image (pixmap/bitmap) data, the server defines the byte order, and clients with

different native byte ordering must swap bytes as necessary. For all other parts of the protocol, the client defines the byte order, and the server swaps bytes as necessary.

Children

The children of a window are its first-level subwindows.

Client

An application program connects to the window system server by some interprocess communication (IPC) path, such as a TCP connection or a shared memory buffer. This program is referred to as a client of the window system server. More precisely, the client is the IPC path itself; a program with multiple paths open to the server is viewed as multiple clients by the protocol. Resource lifetimes are controlled by connection lifetimes, not by program lifetimes.

Clipping region

In a graphics context, a bitmap or list of rectangles can be specified to restrict output to a particular region of the window. The image defined by the bitmap or rectangles is called a clipping region.

Colormap

A colormap consists of a set of entries defining color values. The colormap associated with a window is used to display the contents of the window; each pixel value indexes the colormap to produce RGB values that drive the guns of a monitor. Depending on hardware limitations, one or more colormaps may be installed at one time, so that windows associated with those maps display with correct colors.

Connection

The IPC path between the server and client program is known as a connection. A client program typically (but not necessarily) has one connection to the server over which requests and events are sent.

Containment

A window "contains" the pointer if the window is viewable and the hotspot of the cursor is within a visible region of the window or a visible region of one of its inferiors. The border of the window is included as part of the window for containment. The pointer is "in" a window if the window contains the pointer but no inferior contains the pointer.

Coordinate system

The coordinate system has the X axis horizontal and the Y axis vertical, with the origin [0, 0] at the upper left. Coordinates are integral, in terms of pixels, and coincide with pixel centers. Each window and pixmap has its own coordinate system. For a window, the origin is inside the border at the inside upper left.

Cursor

A cursor is the visible shape of the pointer on a screen. It consists of a hot spot, a source bitmap, a shape bitmap, and a pair of colors. The cursor defined for a window controls the visible appearance when the pointer is in that window.

Depth

The depth of a window or pixmap is the number of bits per pixel that it has. The depth of a graphics context is the depth of the drawables it can be used in conjunction with for graphics output.

Device

Keyboards, mice, tablets, track-balls, button boxes, and so on are all collectively known as input devices. The core protocol only deals with two devices, "the keyboard" and "the pointer."

DirectColor

DirectColor is a class of colormap in which a pixel value is decomposed into three separate subfields for indexing. The first subfield indexes an array to produce red intensity values. The second subfield indexes a second array to produce blue intensity values. The third subfield indexes a third array to produce green intensity values. The RGB values can be changed dynamically.

Display

A server, together with its screens and input devices, is called a display.

Drawable

Both windows and pixmaps can be used as sources and destinations in graphics operations. These windows and pixmaps are collectively known as drawables. However, an *InputOnly* window cannot be used as a source or destination in a graphics operation.

Event

Clients are informed of information asynchronously by means of events. These events can be generated either asynchronously from devices or as side effects of client requests. Events are grouped into types. The server never sends events to a client unless the client has specifically asked to be informed of that type of event. However, other clients can force events to be sent to other clients. Events are typically reported relative to a window.

Event mask

Events are requested relative to a window. The set of event types that a client requests relative to a window is described by using an event mask.

Event propagation

Device-related events propagate from the source window to ancestor windows until some client has expressed interest in handling that type of event or until the event is discarded explicitly.

Event source

The window the pointer is in is the source of a device-related event.

Event synchronization

There are certain race conditions possible when demultiplexing device events to clients (in particular deciding where pointer and keyboard events should be sent when in the middle of window management operations). The event synchronization mechanism allows synchronous processing of device events.

Exposure event

Servers do not guarantee to preserve the contents of windows when windows are obscured or reconfigured. Exposure events are sent to clients to inform them when contents of regions of windows have been lost.

Extension

Named extensions to the core protocol can be defined to extend the system. Extension to output requests, resources, and event types are all possible and are expected.

Focus window

The focus window is another term for the input focus.

Font

A font is a matrix of glyphs (typically characters). The protocol does no translation or interpretation of character sets. The client simply indicates values used to index the glyph array. A font contains additional metric information to determine interglyph and interline spacing.

GC, GContext

GC and gcontext are abbreviations for graphics context.

Glyph

A glyph is an image, typically of a character, in a font.

Grab

Keyboard keys, the keyboard, pointer buttons, the pointer and the server can be grabbed for exclusive use by a client. In general, these facilities are not intended to be used by normal applications but are intended for various input and window managers to implement various styles of user interfaces.

Graphics context

Various information for graphics output is stored in a graphics context such as foreground pixel, background pixel, line width, clipping region, and so on. A graphics context can only be used with drawables that have the same root and the same depth as the graphics context.

Gravity

See bit gravity and window gravity.

GrayScale

GrayScale can be viewed as a degenerate case of *PseudoColor*, in which the red, green and blue values in any given colormap entry are equal, thus producing shades of gray. The gray values can be changed dynamically.

Hotspot

A cursor has an associated hotspot that defines the point in the cursor corresponding to the coordinates reported for the pointer.

Identifier

An identifier is a unique value associated with a resource that clients use to name that resource. The identifier can be used over any connection.

Inferiors

The inferiors of a window are all of the subwindows nested below it: the children, the children's children, and so on.

Input focus

The input focus is normally a window defining the scope for processing of keyboard input. If a generated keyboard event would normally be reported to this window or one of its inferiors, the event is reported normally. Otherwise, the event is reported with respect to the focus window. The input focus also can be set such that all keyboard events are discarded and such that the focus window is dynamically taken to be the root window of whatever screen the pointer is on at each keyboard event.

Input manager

Control over keyboard input is typically provided by an input manager client.

InputOnly window

An *InputOnly* window is a window that cannot be used for graphics requests. *InputOnly* windows are invisible and can be used to control such things as cursors, input event generation, and grabbing. *InputOnly* windows cannot have *InputOutput* windows as inferiors.

InputOutput window

An *InputOutput* window is the normal kind of opaque window, used for both input and output. *InputOutput* windows can have both *InputOutput* and *InputOnly* windows as inferiors.

Key grabbing

Keys on the keyboard can be passively grabbed by a client. When the key is pressed, the keyboard is then actively grabbed by the client.

Keyboard grabbing

A client can actively grab control of the keyboard, and key events will be sent to that client rather than the client the events would normally have been sent to.

Keysym

An encoding of a symbol on a keycap on a keyboard.

Mapped

A window is said to be mapped if a map call has been performed on it. Unmapped windows and their inferiors are never viewable or visible.

Modifier keys

Shift, Control, Meta, Super, Hyper, Alt, Compose, Apple, CapsLock, ShiftLock and similar keys are called modifier keys.

Monochrome

Monochrome is a special case of *StaticGray* in which there are only two colormap entries.

Obscure

A window is obscured if some other window obscures it. Window A obscures window B if both are viewable *InputOutput* windows, A is higher in the global stacking order, and the rectangle defined by the outside edges of A intersects the rectangle defined by the outside edges of B. Note the distinction between obscure and occludes. Also note that window borders are included in the calculation and that a window can be obscured and yet still have visible regions.

Occlude

A window is occluded if some other window occludes it. Window A occludes window B if both are mapped, A is higher in the global stacking order, and the rectangle defined by the outside edges of A intersects the rectangle defined by the outside edges of B. Note the distinction between occludes and obscures. Also note that window borders are included in the calculation.

Padding

Some padding bytes are inserted in the data stream to maintain alignment of the protocol requests on natural boundaries. This increases ease of portability to some machine architectures.

Parent window

If C is a child of P, then P is the parent of C.

Passive grab

Grabbing a key or button is a passive grab. The grab activates when the key or button is actually pressed.

Pixel value

A pixel is an N-bit value, where N is the number of bit planes used in a particular window or pixmap (that is, N is the depth of the window or pixmap). For a window, a pixel value indexes a colormap to derive an actual color to be displayed.

Pixmap

A pixmap is a three-dimensional array of bits. A pixmap is normally thought of as a two-dimensional array of pixels, where each pixel can be a value from 0 to (2^N)-1 and where N is the depth (z axis) of the pixmap. A pixmap can also be thought of as a stack of N

bitmaps.

Plane

When a pixmap or window is thought of as a stack of bitmaps, each bitmap is called a plane or bit plane.

Plane mask

Graphics operations can be restricted to only affect a subset of bit planes of a destination. A plane mask is a bit mask describing which planes are to be modified. The plane mask is stored in a graphics context.

Pointer

The pointer is the pointing device attached to the cursor and tracked on the screens.

Pointer grabbing

A client can actively grab control of the pointer. Then button and motion events will be sent to that client rather than the client the events would normally have been sent to.

Pointing device

A pointing device is typically a mouse, tablet, or some other device with effective dimensional motion. There is only one visible cursor defined by the core protocol, and it tracks whatever pointing device is attached as the pointer.

Property

Windows may have associated properties, which consist of a name, a type, a data format, and some data. The protocol places no interpretation on properties. They are intended as a general-purpose naming mechanism for clients. For example, clients might use properties to share information such as resize hints, program names, and icon formats with a window manager.

Property list

The property list of a window is the list of properties that have been defined for the window.

PseudoColor

PseudoColor is a class of colormap in which a pixel value indexes the colormap to produce independent red, green, and blue values; that is, the colormap is viewed as an array of triples (RGB values). The RGB values can be changed dynamically.

Redirecting control

Window managers (or client programs) may want to enforce window layout policy in various ways. When a client attempts to change the size or position of a window, the operation may be redirected to a specified client rather than the operation actually being performed.

Reply

Information requested by a client program is sent back to the client with a reply. Both events and replies are multiplexed on the same connection. Most requests do not generate replies, although some requests generate multiple replies.

Request

A command to the server is called a request. It is a single block of data sent over a connection.

Resource

Windows, pixmaps, cursors, fonts, graphics contexts, and colormaps are known as resources. They all have unique identifiers associated with them for naming purposes. The lifetime of a resource usually is bounded by the lifetime of the connection over which the

resource was created.

RGB values

Red, green and blue (RGB) intensity values are used to define color. These values are always represented as 16-bit unsigned numbers, with 0 being the minimum intensity and 65535 being the maximum intensity. The server scales the values to match the display hardware.

Root

The root of a pixmap, colormap, or graphics context is the same as the root of whatever drawable was used when the pixmap, colormap, or graphics context was created. The root of a window is the root window under which the window was created.

Root window

Each screen has a root window covering it. It cannot be reconfigured or unmapped, but it otherwise acts as a full-fledged window. A root window has no parent.

Save set

The save set of a client is a list of other clients' windows that, if they are inferiors of one of the client's windows at connection close, should not be destroyed and that should be remapped if currently unmapped. Save sets are typically used by window managers to avoid lost windows if the manager terminates abnormally.

Scanline

A scanline is a list of pixel or bit values viewed as a horizontal row (all values having the same y coordinate) of an image, with the values ordered by increasing x coordinate.

Scanline order

An image represented in scanline order contains scanlines ordered by increasing y coordinate.

Screen

A server can provide several independent screens, which typically have physically independent monitors. This would be the expected configuration when there is only a single keyboard and pointer shared among the screens.

Selection

A selection can be thought of as an indirect property with dynamic type; that is, rather than having the property stored in the server, it is maintained by some client (the "owner"). A selection is global in nature and is thought of as belonging to the user (although maintained by clients), rather than as being private to a particular window subhierarchy or a particular set of clients. When a client asks for the contents of a selection, it specifies a selection "target type". This target type can be used to control the transmitted representation of the contents. For example, if the selection is "the last thing the user clicked on" and that is currently an image, then the target type might specify whether the contents of the image should be sent in XY format or Z format. The target type can also be used to control the class of contents transmitted; for example, asking for the "looks" (fonts, line spacing, indentation, and so on) of a paragraph selection rather than the text of the paragraph. The target type can also be used for other purposes. The protocol does not constrain the semantics.

Server

The server provides the basic windowing mechanism. It handles IPC connections from clients, multiplexes graphics requests onto the screens, and demultiplexes input back to the appropriate clients.

Server grabbing

The server can be grabbed by a single client for exclusive use. This prevents processing of any requests from other client connections until the grab is completed. This is typically only a transient state for such things as rubber-banding, pop-up menus, or to execute requests indivisibly.

Sibling

Children of the same parent window are known as sibling windows.

Stacking order

Sibling windows may stack on top of each other. Windows above other windows both obscure and occlude those lower windows. This is similar to paper on a desk. The relationship between sibling windows is known as the stacking order.

StaticColor

StaticColor can be viewed as a degenerate case of *PseudoColor* in which the RGB values are predefined and read-only.

StaticGray

StaticGray can be viewed as a degenerate case of *GrayScale* in which the gray values are predefined and read-only. The values are typically linear or near-linear increasing ramps.

Stipple

A stipple pattern is a bitmap that is used to tile a region that will serve as an additional clip mask for a fill operation with the foreground color.

String Equivalence

Two ISO Latin-1 STRING8 values are considered equal if they are the same length and if corresponding bytes are either equal or are equivalent as follows: decimal values 65 to 90 inclusive (characters "A" to "Z") are pairwise equivalent to decimal values 97 to 122 inclusive (characters "a" to "z"), decimal values 192 to 214 inclusive (characters "A grave" to "O diaeresis") are pairwise equivalent to decimal values 224 to 246 inclusive (characters "a grave" to "o diaeresis"), and decimal values 216 to 222 inclusive (characters "O oblique" to "THORN") are pairwise equivalent to decimal values 246 to 254 inclusive (characters "o oblique" to "thorn").

Tile

A pixmap can be replicated in two dimensions to tile a region. The pixmap itself is also known as a tile.

Timestamp

A timestamp is a time value, expressed in milliseconds. It typically is the time since the last server reset. Timestamp values wrap around (after about 49.7 days). The server, given its current time is represented by timestamp T, always interprets timestamps from clients by treating half of the timestamp space as being earlier in time than T and half of the timestamp space as being later in time than T. One timestamp value (named *CurrentTime*) is never generated by the server. This value is reserved for use in requests to represent the current server time.

TrueColor

TrueColor can be viewed as a degenerate case of *DirectColor* in which the subfields in the pixel value directly encode the corresponding RGB values; that is, the colormap has predefined read-only RGB values. The values are typically linear or near-linear increasing ramps.

Type

A type is an arbitrary atom used to identify the interpretation of property data. Types are

completely uninterpreted by the server and are solely for the benefit of clients.

Viewable

A window is viewable if it and all of its ancestors are mapped. This does not imply that any portion of the window is actually visible. Graphics requests can be performed on a window when it is not viewable, but output will not be retained unless the server is maintaining backing store.

Visible

A region of a window is visible if someone looking at the screen can actually see it; that is, the window is viewable and the region is not occluded by any other window.

Window gravity

When windows are resized, subwindows may be repositioned automatically relative to some position in the window. This attraction of a subwindow to some part of its parent is known as window gravity.

Window manager

Manipulation of windows on the screen and much of the user interface (policy) is typically provided by a window manager client.

XYFormat

The data for a pixmap is said to be in XY format if it is organized as a set of bitmaps representing individual bit planes, with the planes appearing from most-significant to least-significant in bit order.

ZFormat

The data for a pixmap is said to be in Z format if it is organized as a set of pixel values in scanline order.

Index

Access control list	193	ConvertSelection	
Active grab	193	Coordinate system	194
AllocColor	27	CopyArea	
AllocColorCells	27	CopyColormapAndFree	38
AllocColorPlanes	28	CopyGC	39
AllocNamedColor	28	CopyPlane	39
AllowEvents	28	CreateColormap	39
Ancestors	193	CreateCursor	40
Atom	193	CreateGC	40
Background	193	CreateGlyphCursor	46
Backing store	193	CreateNotify	97
Bell	30	CreatePixmap	46
Bit gravity	193	CreateWindow	47
Bit plane	193	Cursor	194
Bitmap	193	DeleteProperty	50
Border	193	Depth	194
Button grabbing	193	DestroyNotify	97
ButtonPress		DestroySubwindows	50
ButtonRelease	89	DestroyWindow	51
Byte order	193	Device	
ChangeActivePointerGrab		DirectColor	195
ChangeGC		Display	195
ChangeHosts		Drawable	
ChangeKeyboardControl		EnterNotify	91
ChangeKeyboardMapping		error codes	
ChangePointerControl		Access	23
ChangeProperty		Alloc	23
ChangeSaveSet		Atom	23
ChangeWindowAttributes		Colormap	23
Children		Cursor	23
CirculateNotify	96	Drawable	23
CirculateRequest	96	Font	23
CirculateWindow		GContext	23
ClearArea	35	IDChoice	23
Client	194	Implementation	23
ClientMessage	96	Length	23
Clipping region	194	Match	24
CloseFont		Name	24
Colormap	194	Pixmap	24
ColormapNotify	96	Request	
ConfigureNotify		Value	
ConfigureRequest		Window	
ConfigureWindow		Event	
connection		Event mask	195
Connection		Event propagation	195
Containment		Event source	

Event synchronization	195	InputOutput window	196
Expose	98	InstallColormap	63
Exposure event	195	InternAtom	64
Extension	195	Key grabbing	197
FillPoly	51	Keyboard grabbing	197
Focus window	195	KeymapNotify	99
FocusIn	93	KeyPress	89
FocusOut	93	KeyRelease	89
Font	195	Keysym	197
ForceScreenSaver	52	KillClient	64
FreeColormap	52	LeaveNotify	91
FreeColors	52	ListExtensions	64
FreeCursor	53	ListFonts	64
FreeGC	53	ListFontsWithInfo	65
FreePixmap	53	ListHosts	65
GC, GContext	196	ListInstalledColormaps	65
GetAtomName		ListProperties	
GetFontPath	53	LookupColor	
GetGeometry		MapNotify	99
GetImage		Mapped	
GetInputFocus		MappingNotify	
GetKeyboardControl		MapRequest	
GetKeyboardMapping		MapSubwindows	
GetModifierMapping		MapWindow	
GetMotionEvents		Modifier keys	
GetPointerControl		Monochrome	
GetPointerMapping		MotionNotify	
GetProperty		NoExposure	
GetScreenSaver		NoOperation	
GetSelectionOwner	58	Obscure	
GetWindowAttributes		Occlude	197
Glyph	196	OpenFont	67
Grab		Padding	
GrabButton	59	Parent window	
GrabKey		Passive grab	197
GrabKeyboard		Pixel value	
GrabPointer		Pixmap	197
GrabServer	62	Plane	
Graphics context	196	Plane mask	198
GraphicsExposure		Pointer	198
Gravity		Pointer grabbing	198
GravityNotify		Pointing device	
GrayScale		PolyArc	
Hotspot		PolyFillArc	
Identifier		PolyFillRectangle	
ImageText16		PolyLine	
ImageText8		PolyPoint	
Inferiors		PolyRectangle	
Input focus		PolySegment	
Input manager		PolyText16	
InputOnly window		PolyText8	

Index

Property	198	Stipple	200
Property list	198	StoreColors	84
PropertyNotify	100	StoreNamedColor	84
PseudoColor	198	String Equivalence	200
PutImage	72	Tile	200
QueryBestSize	72	Timestamp	200
QueryColors		TranslateCoordinates	84
QueryExtension		transport layer	
QueryFont		TrueColor	
QueryKeymap		Type	
QueryPointer		types	
QueryTextExtents		ARC	10
QueryTree		ATOM	
RecolorCursor		BITGRAVITY	
Redirecting control		BITMASK	
remote communication		BOOL	
ReparentNotify		BUTMASK	
ReparentWindow		BUTTON	
Reply		BYTE	
Request		CARD16	
ResizeRequest		CARD32	
Resource		CARD8	
RGB values		CHAR2B	
Root		COLORMAP	
Root window		CURSOR	
RotateProperties		DEVICEEVENT	
Save set		DRAWABLE	
Scanline		EVENT	
Scanline order		FONT	
Screen		FONTABLE	
Selection		GCONTEXT	
SelectionClear		HOST	
SelectionNotify		INT16	
SelectionRequest		INT32	
SendEvent		INT8	
Server		KEYBUTMASK	
Server grabbing		KEYCODE	
SetAccessControl		KEYMASK	
SetClipRectangles		KEYSYM	
SetCloseDownMode		LISTofFOO	
SetDashes		LISTOFVALUE	
SetFontPath		OR	
SetInputFocus		PIXMAP	
SetModifierMapping		POINT	
SetPointerMapping		POINTEREVENT	
SetScreenSaver		RECTANGLE	
SetSelectionOwner		STRING16	
Sibling		STRING10	
Stacking order		TIMESTAMP	
StaticColor		VALUE	
StaticGray		VISUALID	
Didital ay		V 100ГАЦІ <i>И</i>	

WINDOW	9
WINGRAVITY	9
UngrabButton	
UngrabKey	
UngrabKeyboard	
UngrabPointer	
UngrabServer	
UninstallColormap	
UnmapNotify	
UnmapSubwindows	
UnmapWindow	
Viewable	
VisibilityNotify	
Visible	
WarpPointer	86
Window gravity	
Window manager	
XYFormat	
7 Format	201